



E39 MOGUL BASE LAMPS FOR LIGHT COMMERCIAL FIXTURES LCE39

REPLACEMENT
LED LAMPS
LED RETROFITS



Easily Convert existing MH or HPS fixtures to LED with Wave Lighting's Mogul Base Lamps using a ballast bypass. These lamps are designed for enclosed fixtures and replace metal halide and high-pressure sodium lamps. In addition to being energy efficient, our mogul base lamps have an estimated 50,000 hr lifespan.




LCE39-24C-T5
Type 5 LED Lamp
24 Watt, 4000K, 3120lm
Replaces up to 100W MH
360° Beam Angle
DLC Listed lamp
#GKS28-24W-02D3 E39 (4000K)

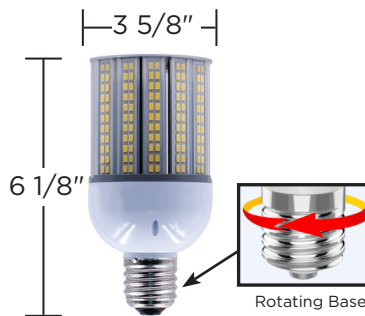


LCE39-20C-T3
Type 3 LED Lamp
20 Watt, 4000K, 3000lm
Replaces up to 100W MH
180° Adjustable Beam Angle
DLC Listed lamp
#GKS38-20W [E;EX]39 (4000K)

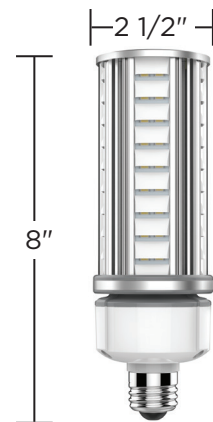

LCE39-24C-DS
Dark Sky LED Lamp
24 Watt, 4000K, 2400lm
Replaces up to 100W MH
180° Down Beam Angle



KELVIN COLOR TEMPERATURE SCALE

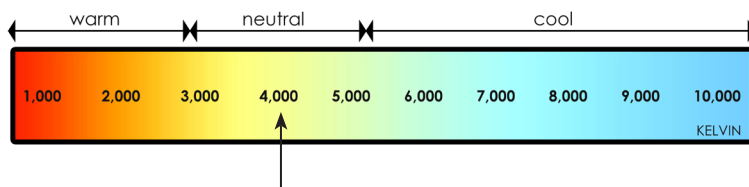

LED SOURCE OPTIONS

REPLACEABLE LED CORN COB

- 100-277V, 50/60Hz
- 100W Metal Halide Equivalent Lamp
- E39 Mogul Base Socket
- Estimated 50,000 Hrs L₇₀
- For Enclosed Fixtures
- Surge Supression
- Available in 4000K CCT 80CRI
- 5 Year Warranty

NOTE: HID BALLAST MUST BE BYPASSED WHEN USED IN RETROFIT APPLICATIONS.

*LC5 models use DLC Listed lamp #GKS28-24W-02D3 E39 (4000K) & LC3 models use DLC Listed lamp #GKS38-20W [E;EX]39 (4000K)

REFER TO CATALOG FOR OPTION SPECIFICATIONS - Specifications subject to change without notice - FIXTURE SPEC 9/21