


GUARDIAN SQUARE WALL/CEILING MOUNT 164FM OUTDOOR DECORATIVE MARLEX®



Wave Lighting's 164FM adds a contemporary look to any outdoor space. Wave Lighting's 164FM is designed for ceiling applications and mounting hardware is included. Options include Emergency Backup and Occupancy Sensor.

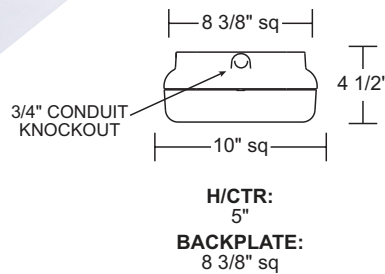

LED SOURCE OPTIONS

LIGHTWAVE LED - LR/LT

- 120V, 50/60 Hz
- AC Driver-On-Board Array
- Estimated 50,000 Hrs L₇₀
- Low Flicker (LT models)
- Surge Supression
- Dimmable (see compatible dimmer list)
- High Efficacy LED Light Source
- 3000K or 4000K CCT 80 or 90CRI
- 5 Year Warranty
- Energy Star

LED MULTI-VOLT SYSTEM - L22

- 120-277V, 50/60Hz
- Estimated 50,000 Hrs L₇₀
- 4000K CCT 80CRI
- 3 Year Warranty

E26 MEDIUM BASE LED - LE26


- 120V, 50/60Hz
- "Screw-In" Medium Base A19/E26 LED Lamp
- Estimated 15,000 Hrs L₇₀
- Low Flicker (3K models)
- Dimmable (see compatible dimmer list)
- 3000K CCT 90CRI or 4000K CCT 80CRI
- 3 Year Warranty

SPECIFICATIONS

- Black or White
- Mounting Hardware Included
- Knockouts For Conduit
- Bug and Tamper Resistant Design
- Opal Diffuser
- Ceiling and Wall Mount
- Minimum Starting Temp -20°F
- UL Listed for Wet Locations
- Non-Corrosive

BK BLACK

WH WHITE



GUIDE CODE: 164FM-BK

CALL FOR PHOTOMETRIC INFORMATION

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
164FM	POLYCARBONATE Opal	E26 MEDIUM BASE LED	C-4K W-3K	BK-Black WH-White	PC-Photocell O-Occupancy Sensor EB-Emergency Backup (EB for 120V Lightwave & 120-277 Multi-Volt LED only) (options cannot be combined)
		(2) 60W MAX Medium Base 2LE26- (2) 9.5W 800lm (E26 LED Lamp) †			
		120V LIGHTWAVE LED			
		LR12-13W 1000lm 80CR ★ LR15-15W 1400lm 80CRI ★ LR22-23W 1900lm 80CRI ★ LT12-12W 1000lm 90CRI LT15-16W 1400lm 90CRI LT22-24W 1900lm 90CRI			
		120-277V MULTI-VOLT LED			
		L22-22W 1824lm	4K		

† Lamp included. ★ Energy Star qualified product.