



FINOSECT	
TVDE	

VOLTAGE

OUTDOOR BOLLARD C202BC

COMMERCIAL LIGHTING

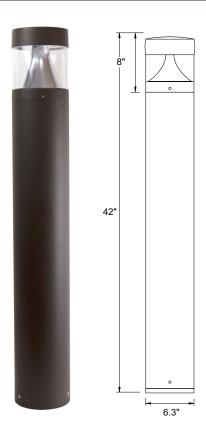



Wave Lighting's C202BC Bollard adds a modern look to any pathway. This fixture is available LED and its industrial strength features make it ETL listed and suitable for wet locations. Wave Lighting's C202BC is designed for low mounting in reinforced concrete (by others). Hardware and template are included.







SPECIFICATIONS

- Tunable CCT
- Switchable Lumen / Wattage
- Powder Coated Finish
- Aluminum Housing
- Mounting Hardware Included
- Polycarbonate Lens
- Minimum Starting Temp -20°F
- ETL Listed for Wet Locations

GUIDE CODE: C202BC-L22S-BK











LED SOURCE OPTIONS

LED MULTI-VOLT SYSTEM - L22

- 120-277V, 50/60Hz
- Estimated 50,000 Hrs L_{70}
- Surge Supression
- Switchable 3K, 4K, 5K CCT 80CRI
- 0 10V Dimming
- 5 Year Warranty

CALL FOR PHOTOMETRIC INFORMATION

LENS	LED LIGHT SOURCE	ССТ	COLOR
C202B POLYCARBONATE 120-277V MULTI-VOLT C-Clear L22-Switchable 12W, 1600lm; 16W, 2100lm or 22W, 3000lm	S -Switchable	BK -Black	
		7 3K, 4K & 5K	BZ -Bronze
	POLYCARBONATE	POLYCARBONATE C-Clear 120-277V MULTI-VOLT L22-Switchable 12W, 1600lm;	POLYCARBONATE C-Clear 120-277V MULTI-VOLT S-Switchable 3K, 4K & 5K