

# WAVE

LIGHTING



Commercial & Residential  
**PRODUCT CATALOG**



# Commercial and Residential Lighting Experts

## WORLD LEADERS IN NON-CORROSIVE OUTDOOR LIGHTING TECHNOLOGIES

New technologies for light engines and materials are paramount for manufacturing quality, energy efficient lighting.

We strive to exceed customer expectations with quality products at competitive pricing for commercial, multi-family and residential community projects.







---

Wave Lighting's **commitment to sustainability** drives us to develop new and exciting products that meet today's energy consumption requirements and are built to last.

---

# Contents

LED Technology	pg 5
Product Guide	pg 6-7
Product Icon Key	pg 8

## Commercial Lighting pg 9

### COMMERCIAL & MAIN STREET

Commercial product line provides safety and security for all types of applications including parks, pedestrian walkways, and parking areas.

## Outdoor Decorative pg 25

### MULTI-FAMILY & HOSPITALITY

#### Everstone™ pg 26

Provides a level of beauty and non-corrosive durability that is unavailable in traditional metallic lighting fixtures.

#### Marlex® pg 31

Non-metallic, injection molded polymer that offers long term, corrosion-resistant service at a very affordable price.

#### Globes & Acorns pg 54 & 55

Acrylic offers clarity and performance at an affordable price, and is extremely UV resistant.

Polycarbonate offers durability, and is extremely impact resistant.

#### Enduracast pg. 46

Constructed of sturdy, high-quality die cast aluminum. Perfect to withstand years of condensation and pollution.

## Indoor Decorative pg 59

### MULTI-FAMILY & HOSPITALITY

Adds a contemporary look to any indoor space. Offered in ceiling, pendant, and wall mount options with dimmable LEDs.

## Posts & Accessories pg 64

Leading supplier of residential and commercial lamp posts and accessories.

## LED Retrofits pg 79

LED retrofits and replacements E26 & E39 lamps.

## Replacements pg 83

Residential and commercial lighting replacements available.



# LED Sustainable Technology

Wave Lighting offers a complete line of LED fixture options. Our line covers everything from 12V landscape, to 120V residential, to multi-volt commercial and industrial.



**ENERGY STAR**<sup>®</sup> was introduced by the Environmental Protection Agency in 1992 as a voluntary market-based partnership to reduce greenhouse gas emissions through increased energy efficiency. Wave Lighting is an ENERGY STAR<sup>®</sup> partner committed to improving the energy efficiency of products for homes and businesses. All of our ENERGY STAR<sup>®</sup> qualified products meet the latest requirements for efficiency. For more information about ENERGY STAR<sup>®</sup>, visit [www.energystar.gov](http://www.energystar.gov). Look for the ENERGY STAR<sup>®</sup> icon for compliant products.



Wave Lighting is proud to offer a wide range of lighting fixtures that meet the **Buy American Act (BAA)** requirements. The BAA was created to stimulate the economy by specifying how government agencies purchase products. Look for the "Buy American Act Compliant" icon for qualifying fixtures.



**Sea turtles** are an endangered species. Between March and October, sea turtle hatchlings are confused by the artificial light from coastal dwellings and head toward pools and streets instead of the safety of the sea. Wave Lighting's turtle-friendly lighting directs light to the ground, is not disruptive to the hatchling turtles, and is available in 596nm (Amber).



Light pollution from outdoor lighting wastes billions of dollars and vast quantities of natural resources. Our **dark sky friendly** fixtures and retrofits focus light downward reducing light pollution and safeguarding our wildlife in their natural environment. Wave Lighting offers night sky friendly outdoor lighting fixtures and retrofits for residential and commercial lighting applications.












National and local energy codes is accomplished with efficient LED light engines. California JA8 & Title 24 are included on many products.






## AVAILABLE IN A WIDE RANGE OF COLOR TEMPERATURES & WATTAGES.

Wave Lighting offers LED fixtures suitable for Type 5, Type 3, and Dark Sky applications; as well as fixtures with dimmable options. Wave Lighting's LED fixtures are the perfect solution for energy savings, performance and maintenance free operation.

### Residential

PICTURE	SERIES	BASE/TYPE	VOLTAGE	DRIVER	DIMMABLE	LIFE	WARRANTY	CRI
	LR	Dedicated LED	120V, 50/60 Hz	On-Board	 Triac	50,000 L70	5 Years	80
	LT	Dedicated LED	120V, 50/60 Hz	On-Board	 Triac	50,000 L70	5 Years	90
	LE26	E26 Medium Base Socket	120V, 50/60 Hz	On-Board	 Triac	15,000 L70	3 Years	3000K = 90 4000K = 80
	LE26A	E26 Medium Base Socket	120-277V, 50/60 Hz	On-Board	No	50,000 L70	5 Years	596nm
	L	Dedicated LED	120-277V, 50/60 Hz	Remote	No	50,000 L70	3 Years	80
	LV	Screw Terminal Base	12V, 50/60 Hz	Remote Transformer Not Included	No	50,000 L70	3 Years	80

### Commercial

PICTURE	SERIES	BASE/TYPE	VOLTAGE	DRIVER	DIMMABLE	LIFE	WARRANTY	TYPES
	L (Globes & Acorns)	Dedicated LED	120-277V, 50/60 Hz	On-Board	0-10V	50,000 L70	5 Years	Type 5
	LC	E39 Mogul Base Socket	120-277V, 50/60 Hz	On-Board	No	50,000 L70	5 Years	Type 3, Type 5 & Dark Sky
	L	Dedicated LED	120-277V, 50/60 Hz	Remote	0-10V	50,000 L70	5 Years	Type 3 & Type 5

PRODUCT GUIDE

COMMERCIAL LIGHTING



Everstone



OUTDOOR DECORATIVE

Marlex





## OUTDOOR DECORATIVE CONT'D


### Marlex



### Globes & Acorns



## INDOOR DECORATIVE

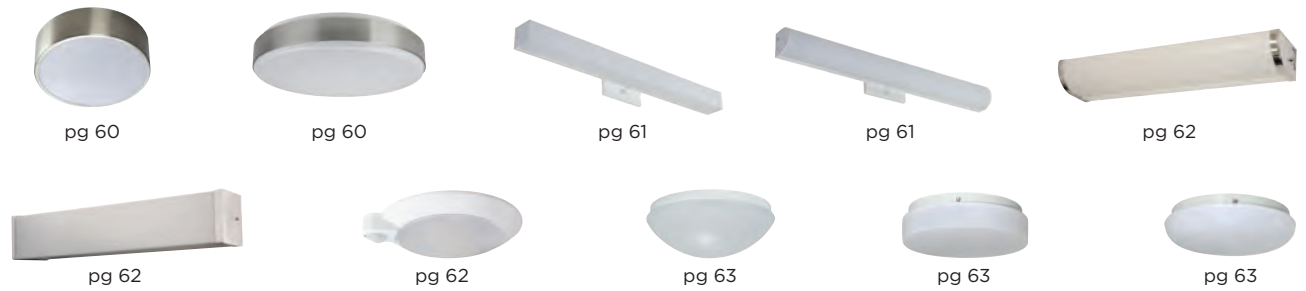

## POSTS & ACCS.



## RETROFITS



## REPLACEMENTS



## Product Icon Key



Energy Star® Models Available



LED Models Available



Photocell Option Available



Dark Sky Friendly Options Available



Turtle Friendly Models



Meets Buy American Act Requirements



Non-Corrosive Oceanside® Approved Models



Meets Americans with Disabilities Act Requirements



IP65 Rated Item

**RoHS**  
compliant

Meets RoHS Requirements



ETL Listed Item



Listed for Damp Locations



Listed for Direct Rain Wet Locations



UL® Listed Item



Occupancy Sensor Option Available



90 CRI



Energy Codes

# COMMERCIAL LIGHTING

## Commercial Area & Main Street





Wave Lighting proudly offers a wide variety of commercial lighting fixtures. All of our fixtures are constructed with the industry's finest materials and may be modified with a vast array of options from Type 5, Type 3, and Dark Sky distributions; color options, and decorative finials.

Wave Lighting's commercial product line provides safety and security for all types of applications including parks, pedestrian walkways, streets and parking areas.

---

Contemporary	10-11
Town Hall	12-13
Riverwalk	14
High Street	15
Park Place	16-21
Walkway	22-23
Cylinder	24
Citadel	24



COMMERCIAL LIGHTING



Contemporary LED Commercial System

- Cast Aluminum
- 0-10V Dimming Options
- T3 Options (Type 5 standard)

GUIDE CODE: C42TC-L40C -BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C42S C42T	GLASS C-Clear	120-277V DEDICATED LED		BK-Black BZ-Bronze WH-White	T3-Type 3 Distribution (Type 5 Standard)
		L40-40W 4000lm L60-60W 6000lm	C-4K W-3K B-5K		

Options cannot be combined. Spec sheets and IES files available online. Specifications subject to change without notice.  
LED option information on page 5. All posts and post options sold separately.







## Contemporary LED Commercial System

- Aluminum Housing
- 0-10V Dimming Options
- T3 Options (Type 5 standard)

GUIDE CODE: C40TL-L40C-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C40T	ACRYLIC L-Opal Drop Lens FF-Frost Flat Lens	120-277V DEDICATED LED		BK-Black BZ-Bronze WH-White	T3-Type 3 Distribution (Type 5 Standard)
		L40-30W 4000lm L60-40W 6000lm L80-60W 9000lm	C-4K W-3K B-5K		
C41T	GLASS C-Clear Lens	L40-40W 3500lm L80-85W 6100lm	C-4K		

Options cannot be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately.



# COMMERCIAL LIGHTING



## Town Hall LED Commercial System

- Aluminum Housing
- 0-10V Dimming Options
- T3 Options (Type 5 standard)

GUIDE CODE: C30TC-L40C-BK-T3

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C30T	GLASS COVER C-Clear	120-277V DEDICATED LED		BK-Black BZ-Bronze WH-White	T3-Type 3 Distribution (Dedicated LED Only, T3 is Special Order, Type 5 Standard)
		L40-40W 4000lm L80-60W 6000lm	C-4K (standard)		
C31T	ACRYLIC L-Opal P-Clear Prism	E26 MEDIUM BASE		BK-Black BZ-Bronze WH-White	MG-E39 Mogul Socket BP1-One Panel BP2-Two Panels BP3-Three Panels T3-Type 3 Distribution (Dedicated LED Only, T3 is Special Order, Type 5 Standard)
		(1) 200W MAX Medium Base			
		120-277V DEDICATED LED			
		L40-30W 4000lm L60-40W 6000lm CCT L80-60W 9000lm	C-4K W-3K B-5K		
		E39 RETRO-FIT LED 120-277V			
		LC5-27W 3120lm, Type 5 + LC3-20W 3000lm, Type 3 + LCD-24W 2400lm, Dark Sky +	C-4K (standard)		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included







## Town Hall LED Commercial System

- LED Retro-Fit Available
- Aluminum Construction
- Photocell Included

**GUIDE CODE: C39TF-BK**

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR
C39T	ACRYLIC F-Frosted	<b>INCANDESCENT</b>		BK-Black
		(1) 200W MAX Mogul Base		
		<b>E39 RETRO-FIT LED 120-277V</b>		
		LC5-54W 7290lm, Type 5 + LC3-40W 5600lm, Type 3 +	C-4K (standard)	

Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included



# COMMERCIAL LIGHTING



## Riverwalk LED Commercial System

- Cast Aluminum
- 0-10V Dimming Options
- Dedicated LED & LED Retro-Fit Available
- T3 Options (Type 5 standard)

GUIDE CODE: C32TP-L40C-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C32T C33T	ACRYLIC L-Opal P-Clear Prism	<b>E26 MEDIUM BASE</b> (1) 200W MAX Medium Base		BK-Black BZ-Bronze WH-White	<b>MG-E39</b> Mogul Socket <b>BP1</b> -One Panel <b>BP2</b> -Two Panels <b>BP3</b> -Three Panels <b>T3</b> -Type 3 Distribution (Dedicated LED Only, T3 is Special Order, Type 5 Standard)
C59T	GLASS F-Frosted	<b>120-277V DEDICATED LED</b>			
		<b>L40</b> -30W 4000lm <b>L60</b> -40W 6000lm <b>L80</b> -60W 9000lm	<b>C</b> -4K <b>W</b> -3K <b>B</b> -5K		
		<b>E39 RETRO-FIT LED 120-277V</b>			
		<b>LC5</b> -54W 7290lm, Type 5 + <b>LC3</b> -40W 5600lm, Type 3 + <b>LCD</b> -54W 5900lm, Dark Sky +	<b>C</b> -4K (standard)		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included





## High Street LED Commercial System

- Cast Aluminum
- 0-10V Dimming Options
- Dedicated LED Retro-Fit Available
- T3 Options (Type 5 standard)

**GUIDE CODE: C36TC-L40C-BK**

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>C36T</b> <b>C37T</b>	ACRYLIC L-Opal C-Clear	<b>E26 MEDIUM BASE</b>		<b>BK</b> -Black <b>BZ</b> -Bronze <b>WH</b> -White	<b>MG</b> -E39 Mogul Socket  <b>T3</b> -Type 3 Distribution (Dedicated LED Only, T3 is Special Order, Type 5 Standard)
		(1) 200W MAX Medium Base			
		<b>120-277V DEDICATED LED</b>			
		<b>L40</b> -30W 4000lm <b>L60</b> -40W 6000lm <b>L80</b> -60W 9000lm	<b>C</b> -4K <b>W</b> -3K <b>B</b> -5K		
		<b>E39 RETRO-FIT LED 120-277V</b>			
		<b>LC5</b> -54W 7290lm, Type 5 + <b>LC3</b> -40W 5600lm, Type 3 + <b>LCD</b> -54W 5900lm, Dark Sky +	<b>C</b> -4K (Standard)		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included.







Park Place LED Commercial System

- Aluminum Fitter & Canopy
- 0-10V Dimming Options
- Integrated LED & LED Retro-Fit Available
- Acorns have 8" neck
- Type 5 Standard
- Type 3 Retro-Fit LED
- 5 year warranty on LED components

GUIDE CODE: C91TC-L40C-BK

ITEM #	ACORN	LIGHT SOURCE	CCT	COLOR	OPTIONS
C91T-Style A C92T-Style B C93T-Style A C94T-Style B	POLYCARBONATE C-Clear Textured  ACRYLIC LA-Opal Textured CA-Clear Textured FA-Frost Textured	E26 MEDIUM BASE		BK-Black BZ-Bronze WH-White	MG-E39 Mogul Socket
		(1) 200W MAX Medium Base			
		120-277V INTEGRATED LED			
		L40-40W 4000lm L60-54W 5700lm	C-4K W-3K		
		E39 RETRO-FIT LED 120-277V			
		LC5-54W 7290lm, Type 5 + LC3-40W 5600lm, Type 3 + LCD-54W 5900lm, Dark Sky +	C-4K		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included.





## Park Place LED Commercial System

- Cast Aluminum
- 0-10V Dimming Options
- Dedicated LED & LED Retro-Fit Available
- Acorns have 8" neck
- Type 5 Standard
- Type 3 Retro-Fit LED
- 5 year warranty on LED components




### GUIDE CODE: C84TC-L40C-BK

ITEM #	ACORN	LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>C83T</b> -Style B <b>C84T</b> -Style A <b>C85T</b> -Style A <b>C86T</b> -Style B	POLYCARBONATE <b>C</b> -Clear Textured	<b>E26 MEDIUM BASE</b>		<b>BK</b> -Black <b>BZ</b> -Bronze <b>WH</b> -White	<b>AFB</b> -Acorn Finial Socket <b>MG</b> -E39 Mogul Socket
		(1) 200W MAX Medium Base			
	<b>120-277V INTEGRATED LED</b>				
	<b>L40</b> -40W 4000lm <b>L60</b> -54W 5700lm	<b>C</b> -4K <b>W</b> -3K			
	<b>E39 RETRO-FIT LED 120-277V</b>				
	<b>LC5</b> -54W 7290lm, Type 5 + <b>LC3</b> -40W 5600lm, Type 3 + <b>LCD</b> -54W 5900lm, Dark Sky +	<b>C</b> -4K			
	ACRYLIC <b>LA</b> -Opal Textured <b>CA</b> -Clear Textured <b>FA</b> -Frost Textured				

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included.



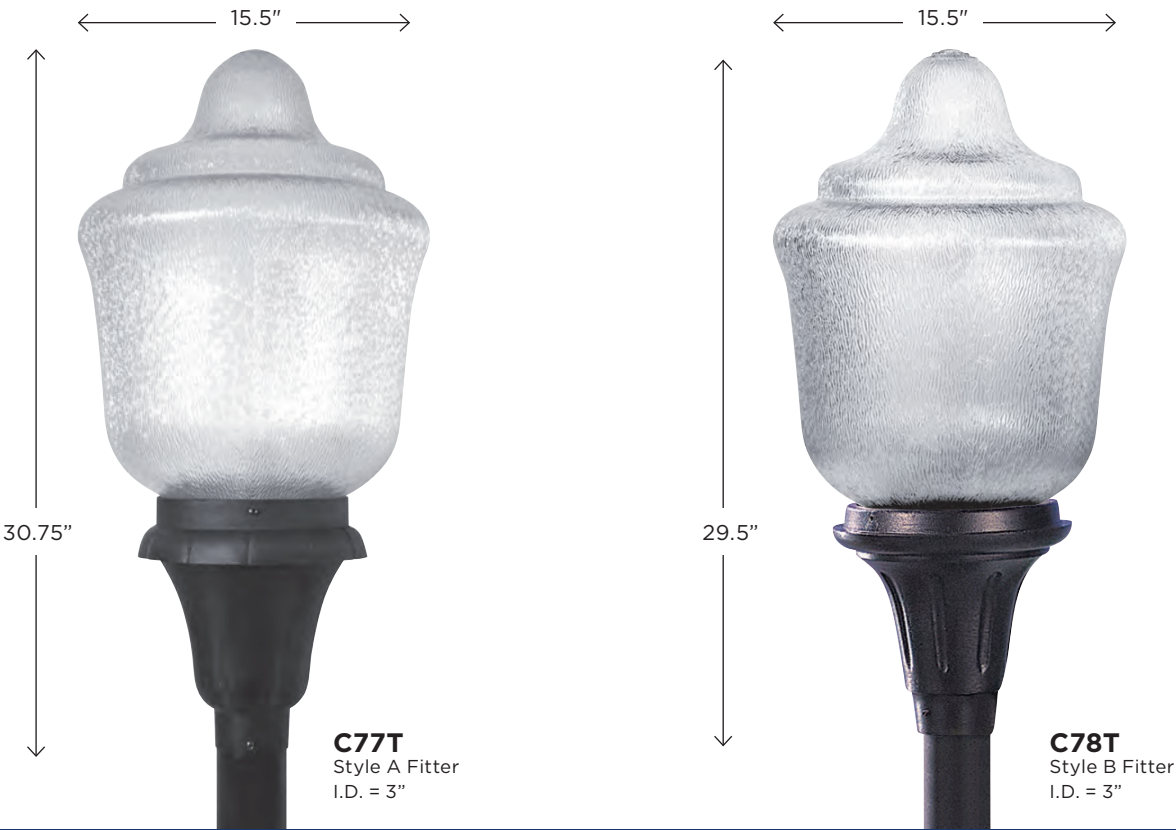

Park Place LED Commercial System

- Cast Aluminum Fitter
  - 0-10V Dimming Options
  - Integrated LED & LED Retro-Fit Available
- Acorns have 8” necks
  - Type 5 Standard
  - Type 3 Retro-Fit LED
  - 5 year warranty on
- LED components

GUIDE CODE: C77TC-L40C-BK

ITEM #	ACORN	LIGHT SOURCE	CCT	COLOR	OPTIONS
C77T-Style A C78T-Style B	POLYCARBONATE C-Clear Textured	E26 MEDIUM BASE		BK-Black BZ-Bronze WH-White	AFB-Acorn Finial Topper MG-E39 Mogul Socket
	ACRYLIC CA-Clear Textured	(1) 200W MAX Medium Base			
		120-277V INTEGRATED LED			
		L40-40W 4000lm L60-54W 5700lm	C-4K W-3K		
		E39 RETRO-FIT LED 120-277V			
		LC5-54W 7290lm, Type 5 + LC3-40W 5600lm, Type 3 + LCD-54W 5900lm, Dark Sky +	C-4K		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included. See page 85 for acorn replacements and measurements.







**C75T**  
Style A Fitter  
I.D. = 3"



**C76T**  
Style B Fitter  
I.D. = 3"

## Park Place LED Commercial System

- Cast Aluminum Fitter
- 0-10V Dimming Options
- Integrated LED & LED Retro-Fit Available
- Acorns have 8" necks
- Type 5 Standard
- Type 3 Retro-Fit LED
- 5 year warranty on

LED components

### GUIDE CODE: C75TC-L40C-BK

ITEM #	ACORN	LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>C75T</b> -Style A <b>C76T</b> -Style B	POLYCARBONATE <b>C</b> -Clear Textured  ACRYLIC <b>LA</b> -Opal Textured <b>CA</b> -Clear Textured <b>FA</b> -Frost Textured	<b>E26 MEDIUM BASE</b>		<b>BK</b> -Black <b>BZ</b> -Bronze <b>WH</b> -White	<b>MG</b> -E39 Mogul Socket
		(1) 200W MAX Medium Base			
		<b>120-277V INTEGRATED LED</b>			
		<b>L40</b> -40W 4000lm <b>L60</b> -54W 5700lm	<b>C</b> -4K <b>W</b> -3K		
		<b>E39 RETRO-FIT LED 120-277V</b>			
		<b>LC5</b> -54W 7290lm, Type 5 + <b>LC3</b> -40W 5600lm, Type 3 + <b>LCD</b> -54W 5900lm, Dark Sky +	<b>C</b> -4K		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included. See page 85 for acorn replacements and measurements.



COMMERCIAL LIGHTING



Park Place LED Commercial System

- Cast Aluminum Fitter
  - 0-10V Dimming Options
  - Integrated LED & LED Retro-Fit available
  - 24", 27", 30" & 36" Opal Globes available
- Globes have 8" Neck (*replacements page 85*)
  - Type 5 Standard
  - Type 3 Retro-Fit LED
  - 5 year warranty on LED components

GUIDE CODE: C2014TL-L40C-BK

ITEM #	GLOBE	LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>C2014T</b> -Style A <b>C2024T</b> -Style B	POLYCARBONATE <b>C</b> -Clear <b>L</b> -Opal	<b>E26 MEDIUM BASE</b>  (1) 200W MAX Medium Base		<b>BK</b> -Black <b>BZ</b> -Bronze <b>WH</b> -White	<b>MG</b> -E39 Mogul Socket
<b>C8014T</b> -Style A <b>C8024T</b> -Style B	ACRYLIC <b>C</b> -Clear <b>F</b> -Frost <b>L</b> -Opal <b>S</b> -Smoke	<b>120-277V INTEGRATED LED</b>			
		<b>L40</b> -40W 4000lm <b>L60</b> -54W 5700lm	<b>C</b> -4K <b>W</b> -3K		
		<b>E39 RETRO-FIT LED 120-277V</b>			
		<b>LC5</b> -54W 7290lm, Type 5 + <b>LC3</b> -40W 5600lm, Type 3 + <b>LCD</b> -54W 5900lm, Dark Sky +	<b>C</b> -4K		

Some options cannot be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included.





## Park Place LED Commercial System

- Cast Aluminum Fitter
- 0-10V Dimming Options
- Integrated LED & LED Retro-Fit available
- 24", 27", 30" & 36" Opal Globes available
- Globes have 8" Neck (*replacements page 85*)
- Type 5 Standard
- Type 3 Retro-Fit LED
- 5 year warranty on LED components

### GUIDE CODE: C2015TL-L40C-BK

ITEM #	GLOBE	LIGHT SOURCE	CCT	COLOR	OPTIONS
C2015T-Style A C2025T-Style B	POLYCARBONATE C-Clear L-Opal	<b>E26 MEDIUM BASE</b> (1) 200W MAX Medium Base		BK-Black BZ-Bronze WH-White	MG-E39 Mogul Socket
C8015T-Style A C8025T-Style B	ACRYLIC C-Clear F-Frost L-Opal S-Smoke	<b>120-277V INTEGRATED LED</b> L40-40W 4000lm L60-54W 5700lm	C-4K W-3K		
		<b>E39 RETRO-FIT LED 120-277V</b> LC5-54W 7290lm, Type 5 + LC3-40W 5600lm, Type 3 + LCD-54W 5900lm, Dark Sky +	C-4K		

Some options cannot be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included.







Walkway Bollards

- Aluminum Housing
- Mounting Hardware Included
- 0-10V Dimming

GUIDE CODE: C200BC-L10C-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR
C200B	POLYCARBONATE C-Clear	120-277V MULTI-VOLT	C-4K	BK-Black BZ-Bronze
		L10-10W, 937lm		

GUIDE CODE: C201BC-L20C-BK



ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR
C201B	POLYCARBONATE C-Clear	120-277V MULTI-VOLT	C-4K	BK-Black BZ-Bronze
		L20-20W, 1400lm	W-3K	

Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.





**TUNABLE**  
Color Temperature  
& Lumen Output



SWITCH  
PANEL  
ON  
REVERSE  
SIDE



## Walkway Bollards

- Tunable CCT & Switchable Lumen / Wattage
- O-10V Dimming
- Aluminum Housing
- Mounting Hardware Included

**GUIDE CODE: C202BC-L22S-BK**


ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR
<b>C202B</b> <b>C203B</b>	POLYCARBONATE <b>C-Clear</b>	<b>120-277V MULTI-VOLT</b>  L22-Switchable 12W, 1600lm; 16W, 2100lm or 22W, 3000lm	<b>S-Switchable</b> 3K, 4K & 5K	<b>BK-Black</b> <b>BZ-Bronze</b>

Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.




# COMMERCIAL LIGHTING

## Cylinder Aluminum Housing



**S64FM**  
Ceiling Mount



**S64W**  
Downlight  
EXTENDS: 7 3/4"  
H/CTR: 2 3/8"  
BACKPLATE:  
4 5/8" X 4 5/8"



**S65W**  
Up & Downlight  
EXTENDS: 7.75"  
H/CTR: 6.875"  
BACKPLATE:  
4.625" X 4.625"

GUIDE: S65W-LR12W-BK

ITEM #	LED LIGHT SOURCE	CCT	COLOR
<b>S64W</b> <b>S64FM</b>	<b>120V LIGHTWAVE LED</b>	<b>C-4K</b>	<b>BK-Black</b> <b>BZ-Bronze</b>
	<b>LR12-13W 1000lm 80CRI</b>		
<b>S65W</b>	<b>LR12-2x13W 2000lm 80CRI</b>		

See page 31 for composite version.



## Citadel Enclosed & Gasketed

- Occupancy sensor available
  - Emergency backup available
  - Die cast aluminum
  - IP65 rated
- (see cut sheet for more information)




SCAN  
FOR  
VIDEO

← 11.80" Diam →



**166FM**  
Ring

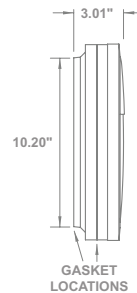

← 11.80" Diam →  
H/CTR: 5 7/8"



**169FM**  
Eyelid

GUIDE: 166FMF-LR15C-BK

ITEM #	DIFFUSER	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>166FM</b> <b>169FM</b>	<b>POLYCARBONATE</b> <b>F-Frosted</b>	<b>120V LIGHTWAVE LED</b>	<b>C-4K</b> <b>W-3K</b>	<b>BK-Black</b> <b>WH-White</b>	<b>EB-Emergency Backup</b> <b>O-Occupancy Sensor</b> (options cannot be combined)  options are not available with LR32 & LT32 light source
		<b>LR15-15W 1400lm 80CRI ★</b>			
		<b>LR22-23W 1900lm 80CRI ★</b>			
		<b>LR32-32W 2700lm 80CRI</b>			
		<b>LT15-16W 1400lm 90CRI</b>			
		<b>LT22-24W 2020lm 90CRI</b>			
		<b>LT32-32W 2700lm 90CRI</b>			
		<b>120-277V MULTI-VOLT</b>			
		<b>L22-22W 1824lm</b>			

★ Lamp included. ★ Energy Star qualified product. Options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.





# OUTDOOR DECORATIVE

Multi-family & Hospitality

---

Everstone	26-30
Marlex	31-45, 47-53, 58
Enduracast	46
Globes & Acorns	54-55
12V Landscape	56-57



Companion-Size Lanterns

Built from the Inside-Out to Last!

- Compression Molded
- Non-Corrosive Durability
- Limited Lifetime Warranty
- Non-Metallic Composite Material
- OceanSide® Approved
- Withstand Harsh Weather





SCAN FOR VIDEO



OCEANSIDE® APPROVED

The OceanSide® icon indicates that this product meets an uncompromising set of standards for low-maintenance durability and harsh weather performance.

Our advanced engineering, pleasing designs and leading-edge technologies allow us to eliminate components that can fail due to rust, corrosion or exposure to extreme climates. OceanSide® Approved products are specifically designed from the INSIDE-OUT to meet the rigors of nature's harshest environment.

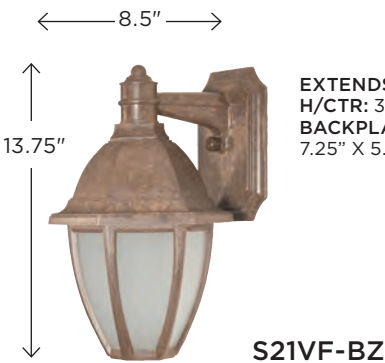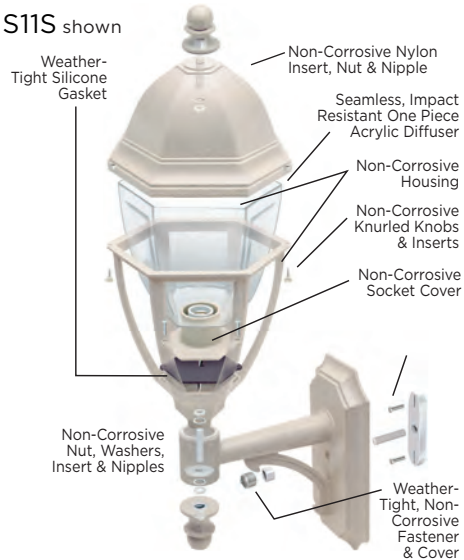

Lanterns Companion-Size, Non-Corrosive

GUIDE CODE: S21VF-BZ-PC

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
S21S S21V S21T	ACRYLIC C-Clear F-Frosted	E26 MEDIUM BASE (1) 60W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) + ★ 120V LIGHTWAVE LED LR12-13W 1000lm 80CRI ★ LT12-12W 1040lm 90CRI	C-4K W-3K	BK-Blackstone WH-Whitestone SN-Sandstone GY-Graystone BZ-Bronzestone	PC-Photocell (only available on S21V)

★ Lamp included. ★Energy Star qualified product. \*Energy Star only available on S21S and S21V. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.



## Lanterns Full-Size, Non-Corrosive

GUIDE CODE: S11VC-LR12W-WH-PC

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
S11S S11V S11T	ACRYLIC C-Clear F-Frosted	<b>E26 MEDIUM BASE</b> (1) 100W MAX Medium Base <b>LE26-9.5W 800lm (E26 LED Lamp) + ★</b> <b>120V LIGHTWAVE LED</b> LR12-13W 1000lm 80CRI ★ LR15-15W 1400lm 80CRI ★ LT12-12W 1040lm 90CRI LT15-16W 1400lm 90CRI	C-4K W-3K	BK-Blackstone WH-Whitestone SN-Sandstone GY-Graystone BZ-Bronzestone	PC-Photocell (only available on S11V)

+ Lamp included. ★ Energy Star qualified product. \*Energy Star only available on S11S and S11V. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.





OUTDOOR DECORATIVE EVERSTONE™ NON-CORROSIVE



S26SL-BK  
EXTENDS: 9.25"  
H/CTR: 8.75"  
BACKPLATE:  
7.25" X 5.375"



S26VC-SN  
EXTENDS: 9.25"  
H/CTR: 3.625"  
BACKPLATE:  
7.25" X 5.375"



S27SC-BZ  
EXTENDS: 9.25"  
H/CTR: 13.75"  
BACKPLATE:  
7.25" X 5.375"

Everstone Non-Corrosive

GUIDE CODE: S26SL-LE26C-BK

ITEM #	GLOBE	LIGHT SOURCE	CCT	COLOR
S26S S26V	ACRYLIC C-Clear Prismatic L-Opal	E26 MEDIUM BASE (1) 60W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) + ★	C-4K W-3K	BK-Blackstone WH-Whitestone SN-Sandstone GY-Graystone BZ-Bronzestone
S27S	POLYCARBONATE C-Clear Textured			

GUIDE CODE: S32WL-LR12C-BK

ITEM #	GLOBE	LIGHT SOURCE	CCT	COLOR
S32W	ACRYLIC C-Clear Prismatic L-Opal	E26 MEDIUM BASE (1) 60W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) + ★ 120V LIGHTWAVE LED LR12-13W 1000lm 80CRI ★ LR15-15W 1400lm 80CRI ★ LT12-12W 1040lm 90CRI LT15-16W 1400lm 90CRI 120-277V MULTI-VOLT LED L11-11W 912lm	C-4K W-3K       4K	BK-Blackstone WH-Whitestone SN-Sandstone GY-Graystone BZ-Bronzestone       S32W-WH EXTENDS: 4" H/CTR: 7.5" BACKPLATE: 13.875" x 6.75"



+ Lamp included. ★Energy Star qualified product. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.





Everstone Post Mount Non-Corrosive



GUIDE CODE: S27TC-WH

ITEM #	GLOBE	LIGHT SOURCE	CCT	COLOR
S26T	ACRYLIC C-Clear Prismatic F-Frost L-Opal	E26 MEDIUM BASE  (1) 100W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) †	C-4K W-3K	BK-Blackstone WH-Whitestone SN-Sandstone GY-Graystone BZ-Bronzestone
S27T	POLYCARBONATE C-Clear Textured			

† Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice.  
LED option information on page 5.





S33WL-LE26A-SN



S33WT-BK  
EXTENDS: 4"  
H/CTR: 7.75"  
BACKPLATE:  
14.125" x 6.75"



Available with No Insignia,  
Lighthouse, or Turtle

## Turtle & Dark Sky Friendly

- Florida Wildlife Certified with Amber LED Light Source
- Meets Standards for Beachfront, Turtle Safe Lighting
- 100% Cut-Off - Complies with Dark Sky Standards
- Non-Corrosive Hardware

GUIDE CODE: S33WL-LE26A-WH


ITEM #	INSIGNIA	LIGHT SOURCE	CCT	COLOR
S33W	N-No Insignia L-Lighthouse T-Turtle	E26 MEDIUM BASE	C-4K W-3K	BK-Blackstone WH-Whitestone SN-Sandstone GY-Graystone BZ-Bronzestone
		(1) 60W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) + ★		
		120V LIGHTWAVE LED		
		LR12-13W 1000lm 80CRI ★ LT12-12W 1040lm 90CRI		
		120-277V E26 AMBER LED	596nm	
		LE26A-11W 336lm (E26 LED Lamp) +		

+ Lamp included. ★Energy Star qualified product. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. Consult factory for details. Florida wildlife certified lighting.





## Cylinder Composite Housing

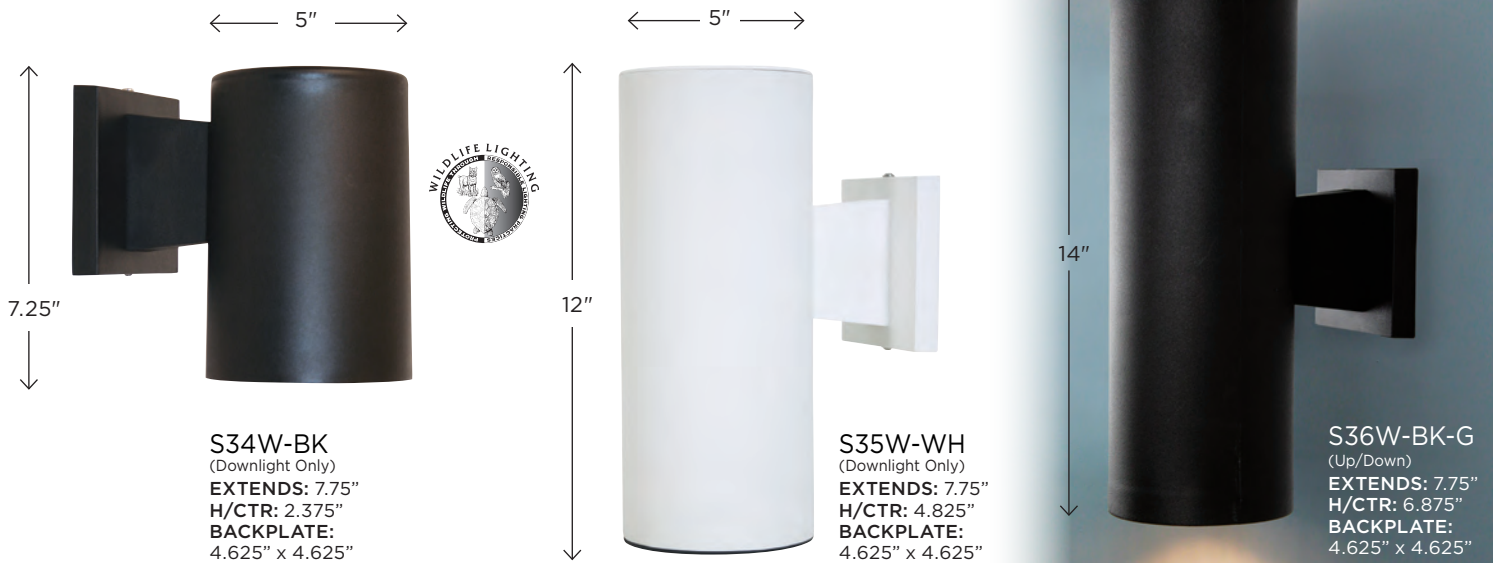

## Turtle & Dark Sky Friendly

- Florida Wildlife Certified with Amber LED Light Source (S34W & S35W only)
- Available in Down Light & Up/Down
- Turtle Safe
- Dark Sky Friendly Lighting
- Composite Construction
- Non-Corrosive

### GUIDE CODE: S34W-BK

ITEM #	LIGHT SOURCE	CCT	COLOR
S34W S35W	<b>E26 MEDIUM BASE</b>	<b>C-4K</b> <b>W-3K</b>	<b>BK-Black</b> <b>WH-White</b>
	(1) 75W MAX Par 30 Lamp <b>LE26-9.5W 800lm (E26 LED Lamp) + ★</b>		
	<b>120-277V E26 AMBER LED</b>		
	<b>LE26A-11W 336lm (E26 LED Lamp) +</b>	596nm	


### GUIDE CODE: S36W-BK-G

ITEM #	LIGHT SOURCE	CCT	COLOR	LENS
S36W	<b>E26 MEDIUM BASE</b>	<b>C-4K</b> <b>W-3K</b>	<b>BK-Black</b> <b>WH-White</b>	<b>G-Glass Top Lens</b> (S36W only)
	(2) 75W MAX Par 30 Lamp <b>2LE26- (2) 9.5W 800lm (E26 LED Lamps) +</b>			
	<b>120-277V E26 AMBER LED</b>			
	<b>2LE26A-(2) 11W 336lm (E26 LED Lamps) +</b>	596nm		

+ Lamp included. ★Energy Star qualified product. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. See Page 24 for Cast Aluminum Version.



OUTDOOR DECORATIVE MARLEX® NON-CORROSIVE

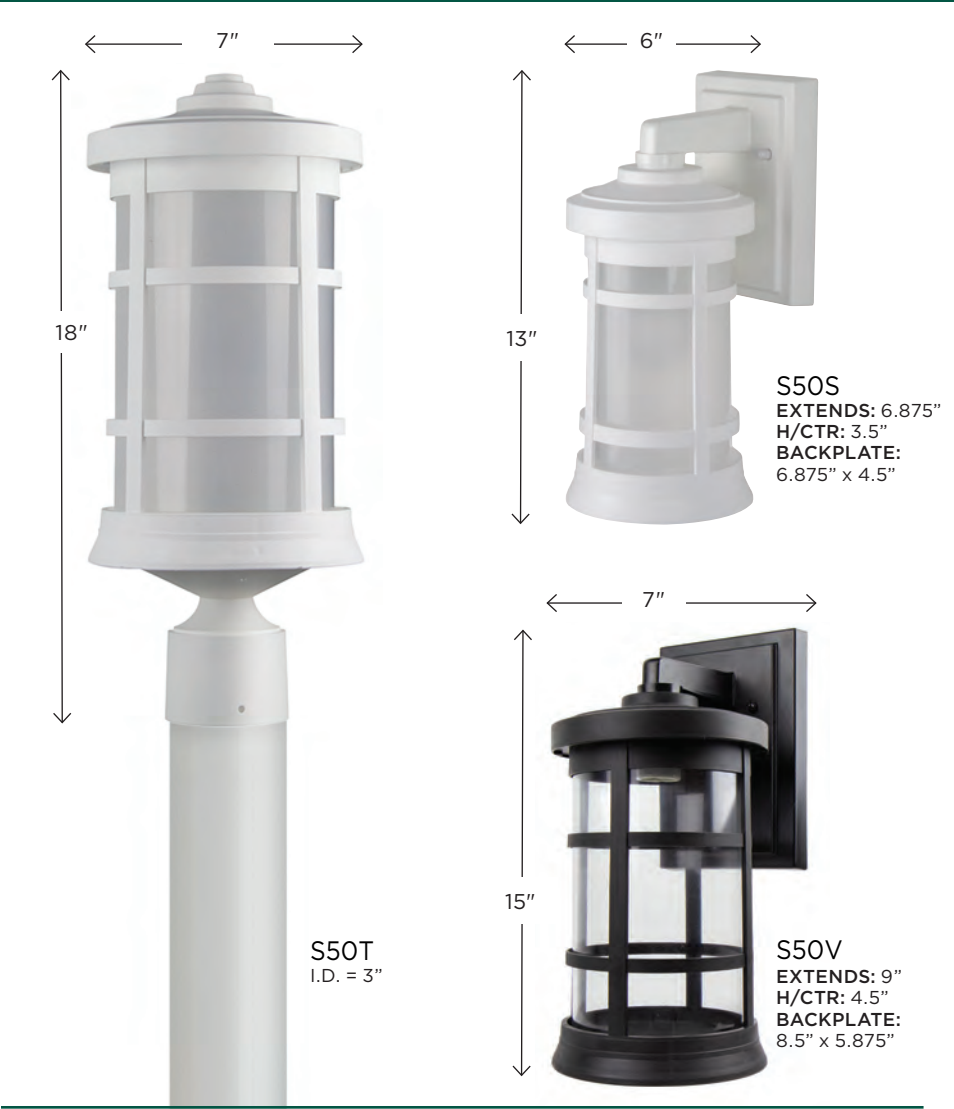

Artisan Non-Corrosive

GUIDE CODE: S50VF-BK-PC

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
S50S S50T S50V	ACRYLIC C-Clear F-Frosted	<b>E26 MEDIUM BASE</b>  (1) 60W MAX Medium Base <b>LE26-9.5W 800lm (E26 LED Lamp) ★ ★</b>  <b>120V LIGHTWAVE LED</b>  <b>LR12-13W 1000lm 80CRI ★</b> <b>LT12-12W 1040lm 90CRI</b>	<b>C-4K</b> <b>W-3K</b>	<b>BK-Black</b> <b>WH-White</b> <b>BZ-Bronze</b>	<b>PC-Photocell</b> (wall mount only)

★ Lamp included. ★Energy Star qualified product. \*Energy Star only available on S50S and S50V. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.



# OUTDOOR DECORATIVE MARLEX® NON-CORROSIVE




## Artisan Non-Corrosive

GUIDE CODE: S51VF-BK-PC

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
S51S S51T S51V S52T S52V	ACRYLIC C-Clear F-Frosted	<b>E26 MEDIUM BASE</b> (1) 60W MAX Medium Base <b>LE26-9.5W 800lm (E26 LED Lamp) + ★</b>	<b>C-4K</b> <b>W-3K</b>	<b>BK-Black</b> <b>WH-White</b> <b>BZ-Bronze</b>	<b>PC-Photocell</b> (wall mount only)
		<b>120V LIGHTWAVE LED</b>			
		<b>LR12-13W 1000lm 80CRI ★</b> <b>LT12-12W 1040lm 90CRI</b>			

★ Lamp included. ★Energy Star qualified product. \*Energy Star only available on S51S, S51V, and S52V. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.



**349 Pier Mount  
Adaptors Available**  
(see page 78)





Nautical


GUIDE CODE: S75VC-BK

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
S75V	ACRYLIC C-Clear Prismatic L-Opal	E26 MEDIUM BASE	C-4K W-3K	BK-Black WH-White	PC-Photocell (120V only)
		(1) 60W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) + ★			
		120V LIGHTWAVE LED			
		LR12-13W 1000lm 80CRI ★ LT12-12W 1040lm 90CRI			
		120-277V MULTI-VOLT LED			
		L11-11W 912lm	4K		


GUIDE CODE: S75TC-BK

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR
S75T	ACRYLIC C-Clear Prismatic	E26 MEDIUM BASE	C-4K W-3K	BK-Black WH-White
		(1) 60W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) +		
		120V LIGHTWAVE LED		
		LR12-13W 1000lm 80CRI LT12-12W 1040lm 90CRI		

+ Lamp included. ★Energy Star qualified product. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.



S75T-WH  
I.D. = 3"  
Pictured with 348  
stub post (page 78).

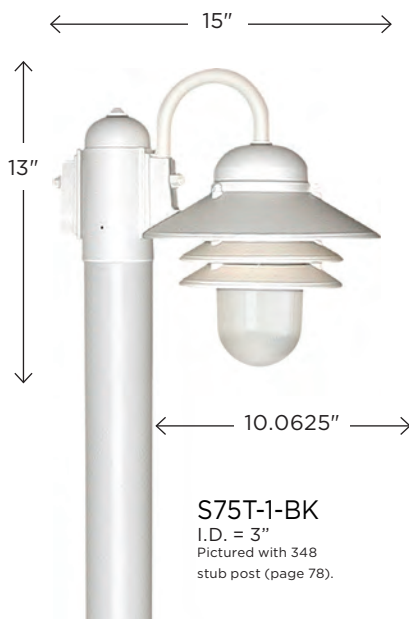

## Nautical

### GUIDE CODE: S75TC-1-LR12C-WH-PC

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>S75TC-1</b> <b>S75TL-1</b>	<u>ACRYLIC</u> C-1-Clear Prismatic L-1-Opal	<b>E26 MEDIUM BASE</b>	<b>C-4K</b> <b>W-3K</b>	<b>BK-Black</b> <b>WH-White</b>	<b>PC-Photocell</b> (120V only)
		(1) 60W MAX Medium Base <b>LE26-9.5W 800lm (E26 LED Lamp) +</b>			
		<b>120V LIGHTWAVE LED</b>			
		<b>LR12-13W 1000lm 80CRI</b> <b>LT12-12W 1040lm 90CRI</b>			
		<b>120-277V MULTI-VOLT LED</b>			
		<b>L11-11W 912lm</b>	4K		

### GUIDE CODE: S75TC-2-LR12C-WH-PC

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>S75TC-2</b> <b>S75TL-2</b>	<u>ACRYLIC</u> C-2-Clear Prismatic L-2-Opal	<b>E26 MEDIUM BASE</b>	<b>C-4K</b> <b>W-3K</b>	<b>BK-Black</b> <b>WH-White</b>	<b>PC-Photocell</b> (120V only)
		(2) 60W MAX Medium Base <b>2LE26-9.5W 800lm (E26 LED Lamp) +</b>			
		<b>120V LIGHTWAVE LED</b>			
		<b>LR12-13W 1000lm 80CRI</b> <b>LT12-12W 1040lm 90CRI</b>			
		<b>120-277V MULTI-VOLT LED</b>			
		<b>L22-22W 1824lm</b>	4K		

+ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice.  
LED option information on page 5.





Nautical

- Wall Or Ceiling Mount
  - Standard Bulkhead Design
- Photocell On Select Models
  - LED Options Available

GUIDE CODE: S761WF-LR12W-WH-PC

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
S761W S772W S791W	POLYCARBONATE F-Frosted Ribbon	E26 MEDIUM BASE	C-4K W-3K	BK-Black WH-White	PC-Photocell (120V Lightwave LED only)
		POLYCARBONATE BACK PAN			
		(1) 60W MAX Medium Base			
		LE26-9.5W 800lm (E26 LED Lamp) ★ ★			
		120V LIGHTWAVE LED			
		ALUMINUM BACK PAN			
		LR12-13W 1000lm 80CRI ★			
		LR15-15W 1400lm 80CRI ★			
		LR22-23W 1900lm 80CRI ★			
		LT12-12W 1040lm 90CRI			
		LT15-16W 1400lm 90CRI			
		LT22-24W 2020lm 90CRI			
		120-277V MULTI-VOLT LED	4K		
		L22-22W 1824lm			

★ Lamp included. ★Energy Star qualified product. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.







**S76WF-WH**  
Polycarbonate  
Back Pan  
H/CTR: 2.75"  
Depth: 4.25"  
Aluminum Back Pan  
H/CTR: 3"  
10.625" x 6"  
Depth: 4.5"



**S771WF-BK**  
Polycarbonate  
Back Pan  
H/CTR: 2.75"  
Depth: 4.25"  
Aluminum Back Pan  
H/CTR: 3"  
10.625" x 6"  
Depth: 4.5"



**S77WF-WH**  
H/CTR: 2.75"  
Polycarbonate  
Back Pan  
H/CTR: 2.75"  
Depth: 4.25"  
Aluminum Back Pan  
H/CTR: 3"  
10.625" x 6"  
Depth: 4.5"



**S79WF-BK**  
H/CTR: 2.75"  
Polycarbonate  
Back Pan (ADA version)  
H/CTR: 2.75"  
Depth: 4"  
Aluminum Back Pan  
H/CTR: 3"  
10.625" x 6"  
Depth: 4.5"

## Nautical

- Wall Mount
- Photocell On Select Models
- Standard Bulkhead Design
- LED Options Available

### GUIDE CODE: S76WF-LR12W-WH-PC

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>S76W</b> <b>S771W</b> <b>S77W</b> <b>S79W</b>	POLYCARBONATE F-Frosted Ribbon	<b>E26 MEDIUM BASE</b>	<b>C-4K</b> <b>W-3K</b>	<b>BK-Black</b> <b>WH-White</b>	<b>PC-Photocell</b> (120V Lightwave LED only)
		<u>POLYCARBONATE BACK PAN</u> (1) 60W MAX Medium Base <b>LE26-9.5W 800lm (E26 LED Lamp) ★ ★</b>			
		<b>120V LIGHTWAVE LED</b>			
		<u>ALUMINUM BACK PAN</u> <b>LR12-13W 1000lm 80CRI ★</b> <b>LT12-12W 1040lm 90CRI</b>			
		<b>120-277V MULTI-VOLT LED</b>	4K		
		<b>L11-11W 912lm</b>			

★ Lamp included. ★ Energy Star qualified product. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. ADA NOTE: Only S79WF with Polycarbonate Back Pan is ADA compliant.



S79WF

# OUTDOOR DECORATIVE MARLEX® NON-CORROSIVE



## Sedona

GUIDE CODE: 230FMF-BK-PC

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
220FM 230FM	ACRYLIC F-Frost	<b>E26 MEDIUM BASE</b> (1) 40W MAX Medium Base <b>LE26-9.5W 800lm (E26 LED Lamp) + ★</b> <b>120V LIGHTWAVE LED</b> <b>LR9-9W 700lm ★</b>	C-4K W-3K	BK-Black WH-White BZ-Bronze	PC-Photocell O-Occupancy Sensor options cannot be combined


GUIDE CODE: 241VC-BK-PC

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
241V	ACRYLIC C-Clear F-Frost	<b>E26 MEDIUM BASE</b> (1) 60W MAX Medium Base <b>LE26-9.5W 800lm (E26 LED Lamp) + ★</b> <b>120V LIGHTWAVE LED</b> <b>LR12-13W 1000lm 80CRI ★</b> <b>LT12-12W 1040lm 90CRI</b>	C-4K W-3K	BK-Black WH-White BZ-Bronze	PC-Photocell

★ Lamp included. ★ Energy Star qualified product. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.



241V-BK  
EXTENDS: 6.75"  
H/CTR: 6.5"  
BACKPLATE:  
5.5" x 4.875"

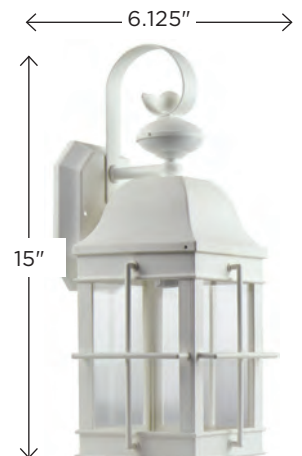



## Ashland

GUIDE CODE: 230SC-BK-PC



**349 Pier Mount  
Adaptors Available**  
(see page 78)

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>230S</b> <b>230T</b>	ACRYLIC C-Clear Beveled	<b>E26 MEDIUM BASE</b> (1) 60W MAX Medium Base <b>LE26-9.5W 800lm (E26 LED Lamp) + ★</b> <b>120V LIGHTWAVE LED</b> <b>LR12-13W 1000lm 80CRI ★</b> <b>LT12-12W 1040lm 90CRI</b>	<b>C-4K</b> <b>W-3K</b>	<b>BK-Black</b> <b>WH-White</b>	<b>PC-Photocell</b> (wall mount only)

GUIDE CODE: 260TC-WH

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>260S</b> <b>260T</b>	ACRYLIC C-Clear Beveled L-Opal Beveled	<b>E26 MEDIUM BASE</b> (1) 60W MAX Medium Base <b>LE26-9.5W 800lm (E26 LED Lamp) + ★</b> <b>120V LIGHTWAVE LED</b> <b>LR12-13W 1000lm 80CRI ★</b> <b>LT12-12W 1040lm 90CRI</b>	<b>C-4K</b> <b>W-3K</b>	<b>BK-Black</b> <b>WH-White</b>	<b>PC-Photocell</b> (wall mount only)

+ Lamp included. ★Energy Star qualified product. \*Energy Star only available on 230S and 260S. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.





# OUTDOOR DECORATIVE MARLEX® NON-CORROSIVE



## Hawthorne

### GUIDE CODE: 208TC-WH

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
208S 208T	ACRYLIC C-Clear Glacier B-Clear Beveled L-Opal Beveled	<b>E26 MEDIUM BASE</b> (1) 60W MAX Medium Base <b>LE26-9.5W 800lm (E26 LED Lamp) ★ ★</b> <b>120V LIGHTWAVE LED</b> <b>LR12-13W 1000lm 80CRI ★</b> <b>LT12-12W 1040lm 90CRI</b>	C-4K W-3K	BK-Black WH-White	PC-Photocell (wall mount only)

### GUIDE CODE: 206VC-WH-PC

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
206V	ACRYLIC C-Clear Glacier	<b>E26 MEDIUM BASE</b> (1) 60W MAX Medium Base <b>LE26-9.5W 800lm (E26 LED Lamp) ★ ★</b> <b>120V LIGHTWAVE LED</b> <b>LR12-13W 1000lm 80CRI ★</b> <b>LT12-12W 1040lm 90CRI</b>	C-4K W-3K	BK-Black WH-White	PC-Photocell

★ Lamp included. ★ Energy Star qualified product. \*Energy Star only available on 208S and 206VC.  
Spec sheets and IES files available online. Specifications subject to change without notice. LED  
option information on page 5.



206VC-WH  
EXTENDS: 5.75"  
H/CTR: 2.375"  
BACKPLATE:  
4.875" RD.





**204SC-WH**  
EXTENDS: 8.5"  
H/CTR: 10.875"  
BACKPLATE:  
4.75" x 4.75"



**204TC-WH**  
I.D. = 3"



**204VL-BK**  
EXTENDS: 8.5"  
H/CTR: 10.875"  
BACKPLATE:  
4.75" x 4.75"

## Park Point

GUIDE CODE: 204SC-WH-PC

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>204S</b> <b>204T</b> <b>204V</b>	ACRYLIC C-Clear Beveled L-Opal Beveled	<b>E26 MEDIUM BASE</b>	<b>C-4K</b> <b>W-3K</b>	<b>BK-Black</b> <b>WH-White</b>	<b>PC-Photocell</b> (wall mount only)
		(1) 60W MAX Medium Base <b>LE26-9.5W 800lm (E26 LED Lamp) + ★</b>			
		<b>120V LIGHTWAVE LED</b>			
		<b>LR12-13W 1000lm 80CRI ★</b> <b>LT12-12W 1040lm 90CRI</b>			

★ Lamp included. ★ Energy Star qualified product. \*Energy Star only available on 204S and 204V. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.



**349 Pier Mount**  
**Adaptors Available**  
(see page 78)

# OUTDOOR DECORATIVE MARLEX® NON-CORROSIVE



## Providence

GUIDE CODE: 220SC-LR12W-WH-PC

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
220S 220T	ACRYLIC C-Clear Beveled F-Frosted Beveled L-Opal Beveled	E26 MEDIUM BASE (1) 60W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) + ★ 120V LIGHTWAVE LED LR12-13W 1000lm 80CRI ★ LT12-12W 1040lm 90CRI	C-4K W-3K	BK-Black WH-White	PC-Photocell (wall mount only)

\*\*Chimney Included when ordered with clear beveled lens.

GUIDE CODE: 270TC-LR12W-BK

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR
270S 270T	ACRYLIC C-Clear Beveled w/ Chimney F-Frosted Beveled	E26 MEDIUM BASE (1) 60W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) + ★ 120V LIGHTWAVE LED LR12-13W 1000lm 80CRI ★ LT12-12W 1040lm 90CRI	C-4K W-3K	BK-Black WH-White


+ Lamp included. ★Energy Star qualified product. \*Energy Star only available on 220S and 270S. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.







**240SH-BK**  
(Long & Short Tail Included)  
**EXTENDS:** 8.5"  
**H/CTR:** 13.25"  
**BACKPLATE:** 5.25" RD.



**240VH-WH**  
**EXTENDS:** 8.5"  
**H/CTR:** 2.75"  
**BACKPLATE:** 5.5" RD.



**240TR-WH**  
I.D. = 3"

## New Town

### GUIDE CODE: 240SH-LR12W-BK-PC


ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>240S</b> <b>240V</b>	ACRYLIC <b>H</b> -Clear Hatch <b>R</b> -Frosted Hatch	<b>E26 MEDIUM BASE</b> (1) 60W MAX Medium Base <b>LE26</b> -9.5W 800lm (E26 LED Lamp) + ★ <b>120V LIGHTWAVE LED</b> <b>LR12</b> -13W 1000lm 80CRI ★ <b>LT12</b> -12W 1040lm 90CRI	<b>C</b> -4K <b>W</b> -3K	<b>BK</b> -Black <b>WH</b> -White	<b>PC</b> -Photocell

### GUIDE CODE: 240TR-LR12W-WH

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR
<b>240T</b>	ACRYLIC <b>H</b> -Clear Hatch <b>R</b> -Frosted Hatch	<b>E26 MEDIUM BASE</b> (1) 60W MAX Medium Base <b>LE26</b> -9.5W 800lm (E26 LED Lamp) + <b>120V LIGHTWAVE LED</b> <b>LR12</b> -13W 1000lm 80CRI <b>LT12</b> -12W 1040lm 90CRI	<b>C</b> -4K <b>W</b> -3K	<b>BK</b> -Black <b>WH</b> -White

+ Lamp included. ★Energy Star qualified product. \*Energy Star only available on 240S and 240V. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.



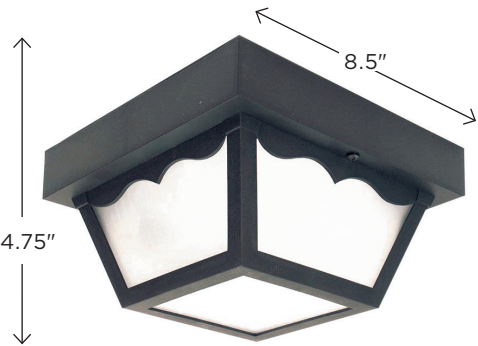

156FM-BK  
EXTENDS: 8.5"  
H/CTR: 13.25"  
BACKPLATE:  
5.25" RD.



157FM-WH  
EXTENDS: 8.5"  
H/CTR: 2.75"  
BACKPLATE:  
5.5" RD.

Townhouse

GUIDE CODE: 156FM-BK

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
156FM 157FM	POLYPROPYLENE Frosted	<b>E26 MEDIUM BASE</b>  POLYCARBONATE BACK PAN (1) 60W MAX Medium Base <b>LE26-9.5W 800lm (E26 LED Lamp) + ★</b>  <b>120V LIGHTWAVE LED</b>  ALUMINUM BACK PAN <b>LR12-13W 1000lm 80CRI ★</b> <b>LR15-15W 1400lm 80CRI ★</b> <b>LR22-23W 1900lm 80CRI ★</b> (Available for 157FM) <b>LT12-12W 1040lm 90CRI</b> <b>LT15-16W 1400lm 90CRI</b> <b>LT22-24W 2020lm 90CRI</b> (Available for 157FM)  <b>120-277V MULTI-VOLT LED</b>  <b>L11-11W 912lm</b> (Available for 156FM) <b>L22-22W 1824lm</b> (Available for 157FM)	C-4K W-3K        4K	BK-Black WH-White	O-Occupancy Sensor (120V Lightwave LED only)

GUIDE CODE: 167FM-BK

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR
167FM	ACRYLIC Frosted	<b>E26 MEDIUM BASE</b> (1) 60W MAX Medium Base <b>LE26-9.5W 800lm (E26 LED Lamp) + ★</b>  <b>120V LIGHTWAVE LED</b>  <b>LR12-13W 1000lm 80CRI ★</b> <b>LR15-15W 1400lm 80CRI ★</b> <b>LR22-23W 1900lm 80CRI ★</b> <b>LT12-12W 1040lm 90CRI</b> <b>LT15-16W 1400lm 90CRI</b> <b>LT22-24W 2020lm 90CRI</b>	C-4K W-3K	BK-Black WH-White

+ Lamp included. ★Energy Star qualified product. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.



167FM-BK





## Pocket

GUIDE CODE: 209-WH-LR12C-PC

ITEM #	GLOBE/JAR	COLOR	LIGHT SOURCE	CCT	OPTIONS	
209	<u>ACRYLIC</u> Clear Prism	BK-Black WH-White	E26 MEDIUM BASE	C-4K W-3K	PC-Photocell (120V only)	
211			(1) 60W MAX Medium Base			
216			LE26-9.5W 800lm (E26 LED Lamp) ★★			
210	120V LIGHTWAVE LED					
212	<u>ACRYLIC</u> Opal		LR12-13W 1000lm 80CRI ★	4K		
217			LT12-12W 1040lm 90CRI			
785	<u>GLASS</u> Clear Ribbed		120-277V MULTI-VOLT LED			
215			L11-11W 912lm			

★ Lamp included. ★Energy Star qualified product. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.






OUTDOOR DECORATIVE



ENDURACAST

NON-CORROSIVE



7.1"

9.25"




266FM

EXTENDS: 3.9"

H/CTR: 4.75"

BACKPLATE:  
9" x 7"

- Photocell Included
- Composite Housing
- Hose Down - IP65 Rated



14.11"

7.20"

530V  
H/CTR: 2.75"  
BACKPLATE:  
4.5" x 5.5"

- Photocell Included
- Aluminum Housing
- High Lumen Output


Copperstone

GUIDE CODE: 266FM-LR12C-BZ

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR
266FM	POLYCARBONATE F-Frosted	120V LIGHTWAVE LED	C-4K	BZ-Bronze
		LR12-13W 1000lm 80CRI		
530V	ACRYLIC C-Clear	LR52-52W 5000lm 80CRI		


Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.



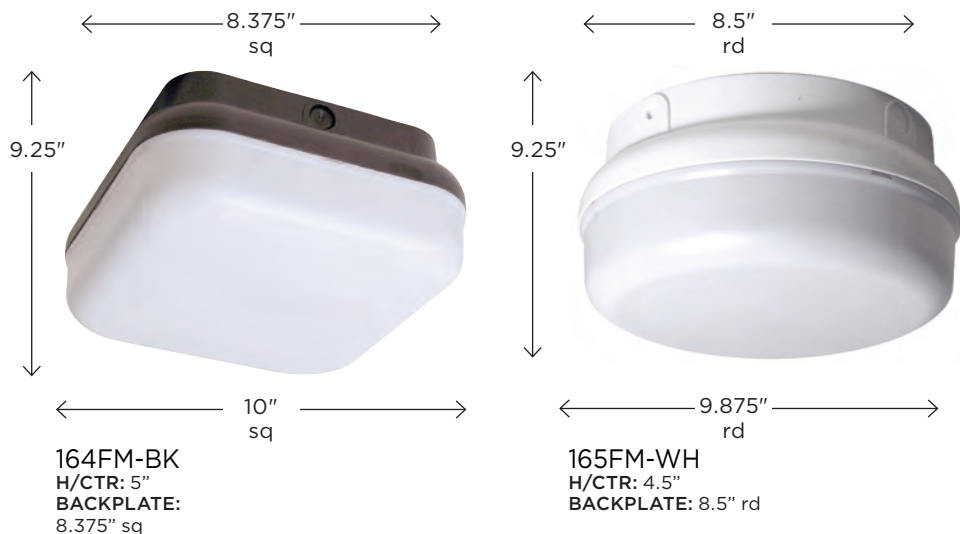

## Address Light

- 120V Integrated LED
- Customizable
- Includes Peel-N-Stick House Numbers (3 of each number)
- Increase Address Visibility

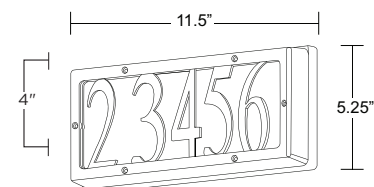

**100FM**  
EXTENDS: 2"  
H/CTR: 2"



## Guardian

- Wall Or Ceiling Mount
- Vandal & Insect Resistant
- Knockouts For Conduit
- Polycarbonate Base & Diffuser
- 90 CRI Options Available
- Multi-Volt Options Available
- Photocell Options Available
- Occupancy Sensor Available
- Emergency Backup Available (see cut sheet for more information)

### GUIDE CODE: 164FM-BK

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS			
164FM 165FM	POLYCARBONATE Opal	E26 MEDIUM BASE LED	C-4K W-3K	BK-Black WH-White	PC-Photocell O-Occupancy Sensor EB-Emergency Backup (EB for 120V Lightwave & 120-277 Multi-Volt LED only) (options cannot be combined)			
		2LE26- (2) 9.5W 800lm (E26 LED Lamp) +						
		120V LIGHTWAVE LED						
		LR12-13W 1000lm 80CR ★ LR15-15W 1400lm 80CRI ★ LR22-23W 1900lm 80CRI ★ LT12-12W 1000lm 90CRI LT15-16W 1400lm 90CRI LT22-24W 1900lm 90CRI						
		120-277V MULTI-VOLT LED	4K					
		L22-22W 1824lm						
		100FM		ACRYLIC White		120V INTEGRATED LED	C-4K	BK-Black
		L5-300lm						


† Lamp included. ★ Energy Star qualified product. \*Energy Star only available with 164 and 165. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.




# OUTDOOR DECORATIVE MARLEX® NON-CORROSIVE



**264FMF-WH**  
H/CTR: 3.875"  
BACKPLATE: 4.5"

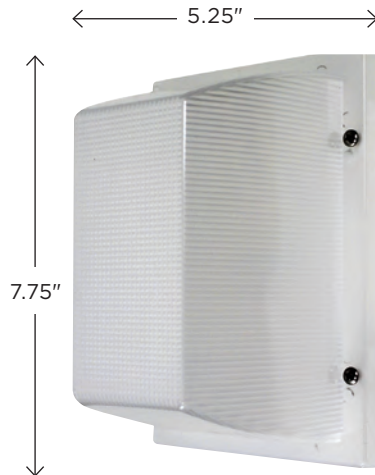

**263FMF-WH**  
H/CTR: 10.5"  
BACKPLATE: 6"

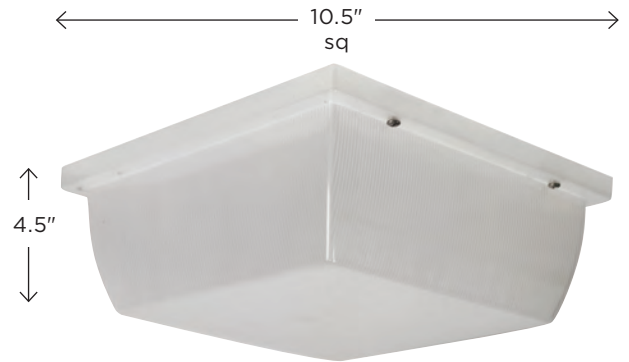

**265FMF-WH**  
H/CTR: 5.25"  
BACKPLATE: 10.25"

## Guardian

- Wall Or Ceiling Mount
- LED Options
- Stainless Steel Hardware

### GUIDE CODE: 263FMF-LR12W-WH

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR
<b>263FM</b> <b>264FM</b>	ACRYLIC <b>F</b> -Frosted Prismatic	<b>E26 MEDIUM BASE</b> (1) 40W MAX Medium Base <b>LE26</b> -9.5W 800lm (E26 LED Lamp) ★ ★ <b>120V LIGHTWAVE LED</b> <b>LR12</b> -13W 1000lm 80CRI ★ <b>LT12</b> -12W 1040lm 90CRI	<b>C</b> -4K <b>W</b> -3K	<b>WH</b> -White

### GUIDE CODE: 265FMF-LR12C-WH-O

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>265FM</b>	ACRYLIC <b>F</b> -Frosted Prismatic	<b>E26 MEDIUM BASE</b> (1) 40W MAX Medium Base <b>2LE26</b> -(2) 9.5W 800lm (E26 LED Lamp) ★ ★ <b>120V LIGHTWAVE LED</b> <b>LR15</b> -15W 1400lm 80CRI ★ <b>LR22</b> -23W 1900lm 80CRI ★ <b>LT15</b> -16W 1400lm 90CRI <b>LT22</b> -24W 2020lm 90CRI	<b>C</b> -4K <b>W</b> -3K	<b>WH</b> -White	<b>O</b> -Occupancy Sensor

★ Lamp included. ★Energy Star qualified product. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.







420L-BK  
H/CTR: 2.1875"  
BACKPLATE: 4.375"



421C-WH  
H/CTR: 2.1875"  
BACKPLATE: 4.375"



422L-BK  
H/CTR: 2.1875"  
BACKPLATE: 4.375"

# Pocket Ceiling

GUIDE CODE: 420L-BK

ITEM #	LENS	COLOR	LIGHT SOURCE	CCT
420	ACRYLIC	BK-Black	E26 MEDIUM BASE LED	C-4K
421	C-Clear Prismatic	WH-White	(1) 60W MAX Medium Base	W-3K
422	L-Opal		LE26-9.5W 800lm (E26 LED Lamp) †	

† Lamp included.



# OUTDOOR DECORATIVE MARLEX® NON-CORROSIVE



## Colonial & Victorian Post Tops

CHIMNEY INCLUDED



GUIDE CODE: 114-LR12W

ITEM #	LENS	LIGHT SOURCE	CCT
111-White 112-Black 113-White 114-Black	ACRYLIC Clear Beveled A-Amber Beveled Diamond C-Clear Beveled Diamond F-Frosted Beveled	E26 MEDIUM BASE (1) 75W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) + 120V LIGHTWAVE LED LR12-13W 1000lm 80CRI LR15-15W 1400lm 80CRI LR22-23W 1900lm 80CRI LT12-12W 1040lm 90CRI LT15-16W 1400lm 90CRI LT22-24W 2020lm 90CRI	C-4K W-3K

GUIDE CODE: 123-LR12W

ITEM #	LENS	LIGHT SOURCE	CCT
123-White	ACRYLIC Clear	E26 MEDIUM BASE (1) 75W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) + 120V LIGHTWAVE LED LR12-13W 1000lm 80CRI LR15-15W 1400lm 80CRI LR22-23W 1900lm 80CRI LT12-12W 1040lm 90CRI LT15-16W 1400lm 90CRI LT22-24W 2020lm 90CRI	C-4K W-3K

+ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.



123



## Saxony & Victorian Post Tops

GUIDE CODE: 411-LR12W

CHIMNEY INCLUDED

ITEM #	LENS	LIGHT SOURCE	CCT
411-White 412-Black 611-White 612-Black	ACRYLIC Clear Beveled A-Amber Beveled Diamond C-Clear Beveled Diamond F-Frosted Beveled	E26 MEDIUM BASE (1) 75W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) + 120V LIGHTWAVE LED LR12-13W 1000lm 80CRI LR15-15W 1400lm 80CRI LR22-23W 1900lm 80CRI LT12-12W 1040lm 90CRI LT15-16W 1400lm 90CRI LT22-24W 2020lm 90CRI	C-4K W-3K

GUIDE CODE: 124-LR12W

ITEM #	LENS	LIGHT SOURCE	CCT
124-Black	ACRYLIC Clear	E26 MEDIUM BASE (1) 75W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) + 120V LIGHTWAVE LED LR12-13W 1000lm 80CRI LR15-15W 1400lm 80CRI LR22-23W 1900lm 80CRI LT12-12W 1040lm 90CRI LT15-16W 1400lm 90CRI LT22-24W 2020lm 90CRI	C-4K W-3K

+ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.





# Colonial Post Tops

GUIDE CODE: 110-LR15W

ITEM #	LENS	LIGHT SOURCE	CCT
110-Black 115-White 116-Black	ACRYLIC Clear Beveled A-Amber Beveled Diamond C-Clear Beveled Diamond F-Frosted Beveled	E26 MEDIUM BASE (1) 75W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) + 120V LIGHTWAVE LED LR12-13W 1000lm 80CRI LR15-15W 1400lm 80CRI LR22-23W 1900lm 80CRI LT12-12W 1040lm 90CRI LT15-16W 1400lm 90CRI LT22-24W 2020lm 90CRI E39 RETRO-FIT LED 120-277V LC5-24W 3120lm, Type 5 + LC3-20W 3000lm, Type 3 + LCD-24W 2400lm, Dark Sky +	C-4K W-3K        C-4K

+ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.








## Vanguard & Saxony Post Tops

GUIDE CODE: 409-LR15W

ITEM #	LENS	LIGHT SOURCE	CCT
409-White 410-Black 609-White 610-Black	ACRYLIC Clear Beveled A-Amber Beveled Diamond C-Clear Beveled Diamond F-Frosted Beveled	<b>E26 MEDIUM BASE</b> (1) 75W MAX Medium Base <b>LE26-9.5W 800lm (E26 LED Lamp) †</b>	C-4K W-3K
		<b>120V LIGHTWAVE LED</b> LR12-13W 1000lm 80CRI LR15-15W 1400lm 80CRI LR22-23W 1900lm 80CRI LT12-12W 1040lm 90CRI LT15-16W 1400lm 90CRI LT22-24W 2020lm 90CRI	
		<b>E39 RETRO-FIT LED 120-277V</b> LC5-24W 3120lm, Type 5 † LC3-20W 3000lm, Type 3 † LCD-24W 2400lm, Dark Sky †	C-4K

† Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.



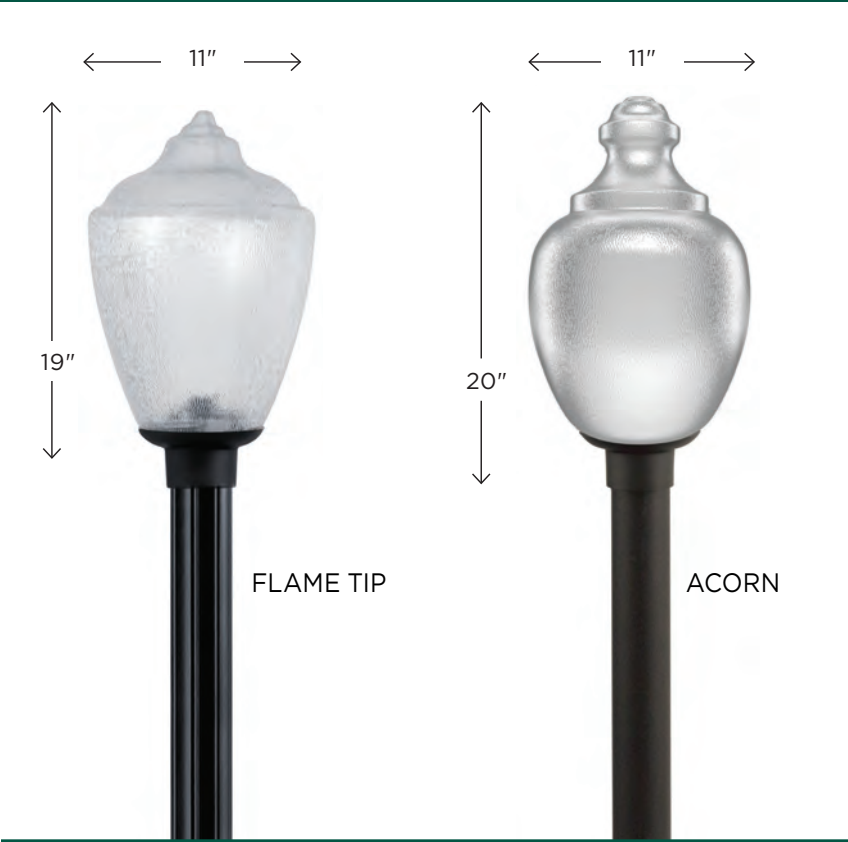

# Acorn Lighting

- Cast Aluminum or Polycarbonate Fitters
- Polycarbonate, Polyethylene or Acrylic Acorns
- Complete acorn fixture with fitter for 3" post



GUIDE CODE: 2017CL-LR12C-BP

ITEM #	LENS	LIGHT SOURCE	CCT	FITTER MATERIAL	OPTIONS
2017-Acorn 2018-Flame Tip	POLYCARBONATE CL-Clear Textured	E26 MEDIUM BASE (1) 75W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) +	C-4K W-3K	CAST ALUMINUM Black WH-White BZ-Bronze	MG-E39 Mogul Socket
8017-Acorn 8018-Flame Tip	ACRYLIC CL-Clear Textured FA-Frost Textured	120V LIGHTWAVE LED LR12-13W 1000lm 80CRI LR15-15W 1400lm 80CRI LR22-23W 1900lm 80CRI LT12-12W 1040lm 90CRI LT15-16W 1400lm 90CRI LT22-24W 2020lm 90CRI		POLYCARBONATE BP-Black WP-White	
9017-Acorn 9018-Flame Tip	POLYETHYLENE Opal Textured	E39 RETRO-FIT LED 120-277V LC5-24W 3120lm, Type 5 + LC3-20W 3000lm, Type 3 + LCD-24W 2400lm, Dark Sky +	C-4K		

+ Lamp included. Acorns have 5 1/4" neckless opening. See page 84 for replacements.





## Globe Lighting

- Cast Aluminum or Polycarbonate Fitters
- Polycarbonate or Acrylic
- Complete globe fixture with fitter for 3" post



### GUIDE CODE: 2001CL-LR12C-BP

ITEM #	LENS	LIGHT SOURCE	CCT	FITTER MATERIAL	OPTIONS
2001*-12" DIA 2002*-14" DIA 2003*-16" DIA 2004*-18" DIA	POLYCARBONATE Opal CL-Clear SM-Smoke	E26 MEDIUM BASE (1) 75W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) +	C-4K W-3K	CAST ALUMINUM Black WH-White BZ-Bronze	MG-E39 Mogul Socket
8000-10" DIA 8001-12" DIA 8002*-14" DIA 8003*-16" DIA 8004*-18" DIA	ACRYLIC Opal CL-Clear FA-Frost SM-Smoke	120V LIGHTWAVE LED LR12-13W 1000lm 80CRI LT12-12W 1040lm 90CRI E39 RETRO-FIT LED 120-277V LC5-24W 3120lm, Type 5 + LC3-20W 3000lm, Type 3 + LCD-24W 2400lm, Dark Sky +	C-4K	POLYCARBONATE BP-Black WP-White	

+ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. Globes have 5 1/4" neckless opening. See page 84 for replacements. \*Not available in clear prismatic.





OUTDOOR DECORATIVE 12V LANDSCAPE NON-CORROSIVE



Colonial Low Voltage LED Non-Corrosive Post Top Lanterns

- 12V PAR 36 LED Lamp Included
- 50W Halogen Equivalent
- Estimated 50,000 hrs L70
- Maintenance Free
- Non-Corrosive Housing
- Fits Most 3" O.D. Posts
- Requires 12V Transformers
- 10' SPT-2 Wire Included
- 3 Year Warranty
- Easy Install

GUIDE CODE: 110C-LV8W

ITEM #	LENS	LIGHT SOURCE	CCT
110-Black 115-White 116-Black	ACRYLIC Clear Beveled A-Amber Beveled Diamond C-Clear Beveled Diamond F-Frosted Beveled	PAR 36 LED 12V LV8-8W 500lm +	W-3K

+ Lamp included. Spec sheets and IES files available online.  
Specifications subject to change without notice.  
LED option information on page 5.



349 Pier Mount  
Adaptors Available  
(see page 78)







Vanguard & Saxony Low Voltage LED Non-Corrosive Post Top Lanterns

- 12V PAR 36 LED Lamp Included
- 50W Halogen Equivalent
- Estimated 50,000 hrs L70
- Maintenance Free
- Non-Corrosive Housing
- Fits Most 3" O.D. Posts
- Requires 12V Transformers
- 10' SPT-2 Wire Included
- 3 Year Warranty
- Easy Install

GUIDE CODE: 610C-LV8W

ITEM #	LENS	LIGHT SOURCE	CCT
609-White 610-Black 409-White 410-Black	ACRYLIC Clear Beveled A-Amber Beveled Diamond C-Clear Beveled Diamond F-Frosted Beveled	PAR 36 LED 12V LV8-8W 500lm +	W-3K

+ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.









# INDOOR DECORATIVE

## Multi-family & Hospitality

Wave Lighting's Indoor lighting adds a contemporary look to any indoor space without breaking the bank.

Wave Lighting's goal is to create a variety of indoor fixtures that reduce carbon footprint, save money, and increase comfort in your home.

---

Oceana	60
LED Bath Lights	61
Vanity Strips	62
Motion Closet	62
Noelani	63




# INDOOR DECORATIVE INDOOR LIGHTING



168FM  
Standard

OPTIONAL PENDANT KIT  
6"/13" Pendant



168FM



SCAN FOR  
VIDEO

## Oceana


- Direct/Indirect Light
- Triac Dimmable
- Occupancy Sensor Option
- Aluminum Housing

GUIDE CODE: 168FM-LR12C-BN-OS

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
168FM	ACRYLIC White	<b>E26 MEDIUM BASE LED</b>	<b>C-4K</b> <b>W-3K</b>	<b>BN-Brush Nickel</b>	<b>PK-Pendant Kit</b> <b>OS-Occupancy Sensor</b> (options not available with LR32 or LT32)
		<b>2LE26-9.5W 800lm (E26 LED Lamp) + ★</b> (2) 40W MAX Medium Base			
		<b>120V LIGHTWAVE LED</b>			
		<b>LR15-15W 1400lm 80CRI ★</b> <b>LR22-23W 1900lm 80CRI ★</b> <b>LR32-32W 2700lm 80CRI</b> <b>LT15-16W 1400lm 90CRI</b> <b>LT22-24W 2020lm 90CRI</b> <b>LT32-32W 2700lm 90CRI</b>			
		<b>120-277V MULTI-VOLT LED</b>			
		<b>L22-22W 1704lm 80CRI ★</b>			
			3K		



178FM  
Low Profile



178FM


GUIDE CODE: 178FM-LR24W-BN

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
178FM	ACRYLIC White	<b>120V LIGHTWAVE LED</b>	<b>W-3K</b>	<b>BN-Brush Nickel</b>	<b>PK-Pendant Kit</b>
		<b>LR24-24W 1850lm ★ 80CRI</b>			

★ Lamp included. ★Energy Star qualified product. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. Mounting kits ship in separate packaging. Assembly required.





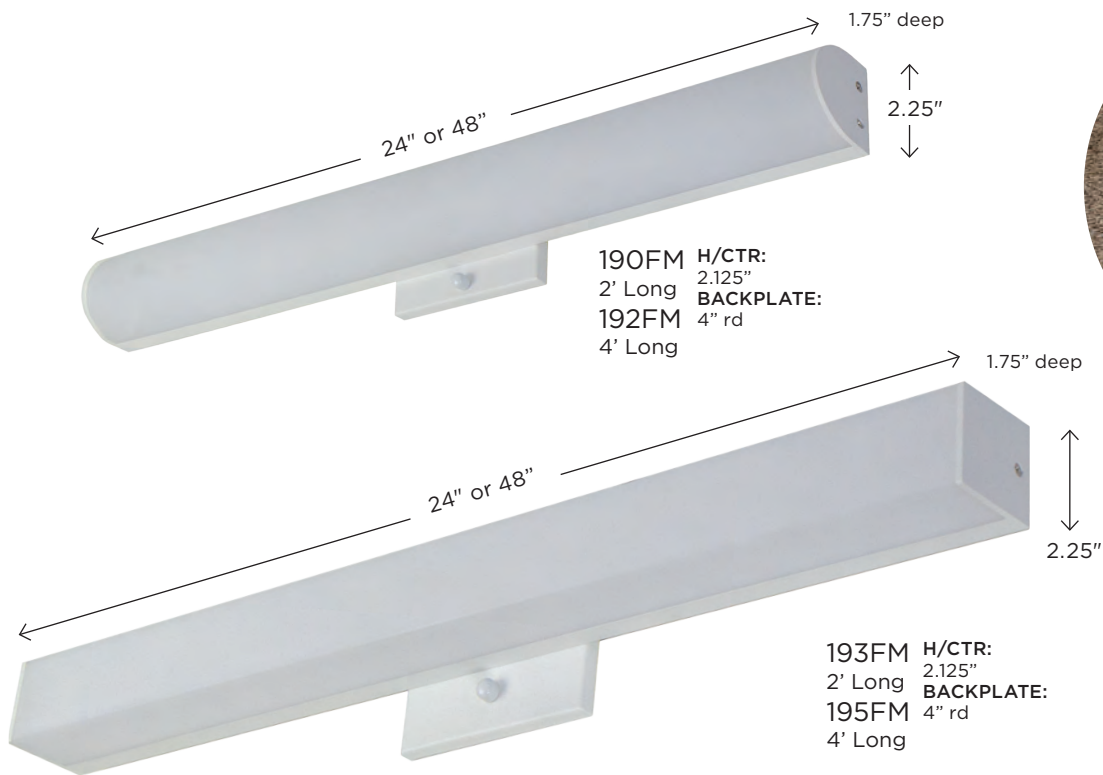

## LED Vanity

- 2' or 4' Lengths
- Triac Dimmable
- Wall Mount
- 3 Year Warranty

### GUIDE CODE: 190FM-L25-WH

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR
190FM 2'	<u>ACRYLIC</u> White	120V INTEGRATED LED	3K	WH-White
193FM 2'		L25-25W 1700lm 80CRI		
192FM 4'	<u>ACRYLIC</u> White	L45-45W 3000lm 80CRI		
195FM 4'				



† Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.





# INDOOR DECORATIVE INDOOR LIGHTING



180FM  
2' Long  
181FM  
3' Long  
182FM  
4' Long

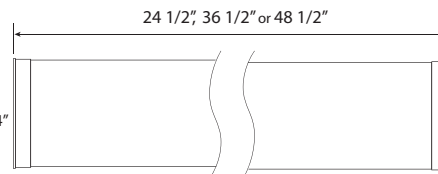

183FM  
2' Long  
184FM  
3' Long  
185FM  
4' Long

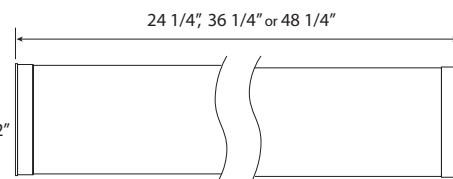

## Vanity Strips

- 120-277V LED Tube Lamps, 3000K
- Non-Dimmable

- Wall or Ceiling Mount
- 3 Year Warranty



GUIDE CODE: 180FM-217T8WD-LED

ITEM #	LENS	LIGHT SOURCE	CCT
180FM 2'	ACRYLIC White	120-277V LED LAMPS	WD-LED-3K
183FM 2'		217T8-(2) 9W Lamps, 1800lm, Tube, 1800lm + 80CRI	
181FM 3'		225T8WD-LED (2) 13W Lamps, Tube, 2600lm + 80CRI	
184FM 3'			
182FM 4'		232T8WD-(2) 18W Lamps, Tube, 3600lm + 80CRI	
185FM 4'			

## Vanora

- 90 CRI/Low Flicker
- Occupancy Sensor Included (3 Minute Timer)
- 5 Year Warranty
- Non-Dimmable

GUIDE CODE: 155FM-LT12W-WH


ITEM #	LENS	LIGHT SOURCE	CCT	COLOR
155FM	POLYCARBONATE White	120V LIGHTWAVE LED LT12-12W 1040lm 90CRI ★	W-3K	WH-White



★ Lamp included. ★ Energy Star qualified product. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.



# INDOOR DECORATIVE INDOOR LIGHTING

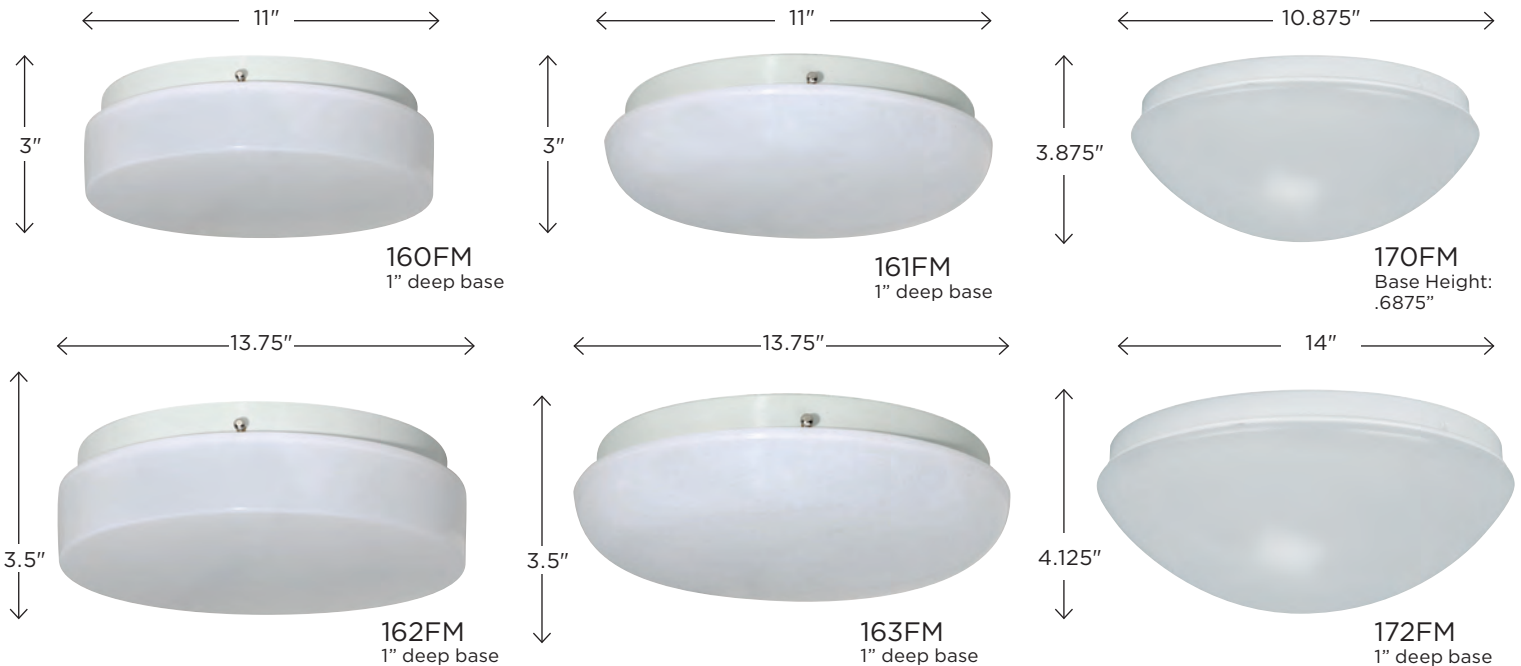

## Noelani

- Triac Dimmable (120V Lightwave LED Only)
- 90 CRI Options Available
- Occupancy Sensor Available
- Emergency Backup Available



### GUIDE CODE: 160FM-LR15W-WH-OS

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
160FM 11"	ACRYLIC White	<b>E26 MEDIUM BASE</b>	<b>C-4K</b> <b>W-3K</b>	<b>WH-White</b>	<b>OS</b> -Occupancy Sensor
161FM 11"		(1) 40W MAX Medium Base			
170FM 11"		<b>LE26-9.5W 800lm (E26 LED Lamp) ★ ★</b>			
		<b>120V LIGHTWAVE LED</b>			
		<b>LR12-13W 1000lm 80CRI ★</b> <b>LR15-15W 1400lm 80CRI ★</b> <b>LT12-12W 1040lm 90CRI</b> <b>LT15-16W 1400lm 90CRI</b>			
		<b>120-277V MULTI-VOLT LED</b>			
		<b>L17-17W 1278lm (160FM &amp; 161FM only)</b>	3K		

### GUIDE CODE: 162FM-LR15W-WH-OS

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
162FM 14"	ACRYLIC White	<b>E26 MEDIUM BASE</b>	<b>C-4K</b> <b>W-3K</b>	<b>WH-White</b>	<b>OS</b> -Occupancy Sensor <b>EB</b> -Emergency Backup (options cannot be combined options not available with LR32 or LT32)
163FM 14"		(2) 40W MAX Medium Base			
172FM 14"		<b>2LE26-9.5W 800lm (E26 LED Lamp) ★ ★</b>			
		<b>120V LIGHTWAVE LED</b>			
		<b>LR15-15W 1000lm 80CRI ★</b> <b>LR22-23W 1400lm 80CRI ★</b> <b>LR32-32W 2700lm 80CRI (162FM &amp; 163FM only)</b> <b>LT15-16W 1040lm 90CRI</b> <b>LT22-24W 2020lm 90CRI</b> <b>LT32-32W 2700lm 90CRI (162FM &amp; 163FM only)</b>			
		<b>120-277V MULTI-VOLT LED</b>			
		<b>L22-22W 1704lm ★ (162FM &amp; 163FM only)</b>	3K		

★ Lamp included. ★ Energy Star qualified product. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.

# POSTS & ACCESSORIES

3" Commercial Lamp Posts	65-66
4" Commercial Lamp Posts	67-68
4" Square Lamp Posts	69-70
Light Commercial Lamp Posts	71-73
Residential Lamp Posts	74-75
Commercial Post Accessories	76
Residential Post Accessories	77-78





## 3" ROUND SURFACE MOUNTED COMMERCIAL POSTS



NO DECORATIVE  
BASE SHOWN



**AB-AMERICANA**  
2 PIECE COVER  
(3BC1)



**DB-DECOR**  
2 PIECE COVER  
(3BC6)



**HX-HEXAGON**  
2 PIECE COVER  
(3BC2)



**RB-ROUND**  
1 PIECE COVER  
(3BC9)



**VB-VICTORIAN**  
2 PIECE COVER  
(3BC3)

GUIDE CODE: 3690AB-BK-HH

## Surface Mounted

- Powdercoated Aluminum
- Fits Most 3" Post Top Fixtures
- Welded Flange Base Included
- Optional Decorative Cover (see measurements on page 76)
- Anchor Bolts & Template Included


### 3" SMOOTH ROUND ALUMINUM .125" WALL THICKNESS




Round



F-Fluted



### PUNCH LOCATIONS (Side View)



ITEM #	DECORATIVE COVER	COLOR	120V OPTIONS
3688-8'	AB-Americana	BK-Black	C-Conv. Outlet (338)
3690-10'	DB-Decor	BZ-Bronze	320-Ezee Change Photo Control
3692-12'	HX-Hexagon	WH-White	HH*
	RB-Round Cover		
	VB-Victorian		


### 3" FLUTED ROUND ALUMINUM .125" WALL THICKNESS


3688F-8'	AB-Americana	BK-Black	688-Button Photo Control
3690F-10'	DB-Decor	BZ-Bronze	HH*
3692F-12'	HX-Hexagon	WH-White	
	RB-Round Cover		
	VB-Victorian		

Call factory for custom lengths & colors. \*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (HH) Hand Hole and ground lug. 3690, 3692, 3690F, and 3692F include Hand Hole unless otherwise specified. EPA ratings available on spec sheets and website. Specifications subject to change without notice. See safety note on page 66.

POSTS & ACCESSORIES

3" DIRECT BURIAL ROUND COMMERCIAL POSTS






TOTAL POST LENGTH	SUGG. BURIAL DEPTH
8'	18"
10'	24"
12'	24"
14'	30"

**SAFETY NOTE:** Selecting posts for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting these items is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post or electrical accessory without getting such assistance, you do so at your own risk.


**GUIDE CODE: 3590F-BZ-HH**





Direct Burial

- Powdercoated Aluminum
- Fits Most 3" Post Top Fixtures
- Includes Inlet Hole
- Decorative Bases Available (see page 76)

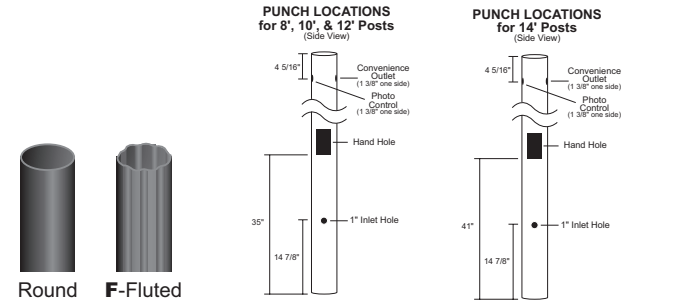

3" SMOOTH ROUND ALUMINUM  
.125" WALL THICKNESS

ITEM #	COLOR	120V OPTIONS
3588-8' 3590-10' 3592-12" 3594-14"	BK-Black BZ-Bronze WH-White	C-Conv. Outlet (338) 320-Ezee Change Photo Control HH*

3" FLUTED ROUND ALUMINUM  
.125" WALL THICKNESS

3588F-8' 3590F-10' 3592F-12' 3594F-14'	BK-Black BZ-Bronze WH-White	688-Button Photo Control HH*
---	-----------------------------------	---------------------------------

Call factory for custom lengths & colors. \*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (HH) Hand Hole and ground lug. 3592, 3594, 3592F, and 3594F include Hand Hole unless otherwise specified. EPA ratings available on spec sheets and website. Specifications subject to change without notice.

## 4" ROUND SURFACE MOUNTED COMMERCIAL POSTS



NO DECORATIVE  
BASE SHOWN



**AB-AMERICANA**  
2 PIECE COVER  
(4BC1)



**DB-DECOR**  
2 PIECE COVER  
(4BC6)



**RB-ROUND**  
1 PIECE COVER  
(4BC9)



**VB-VICTORIAN**  
2 PIECE COVER  
(4BC3)

GUIDE CODE: 4694VB-BK-HH

## Surface Mounted

- Powdercoated Aluminum
- Fits Most 3" Post Top Fixtures
- Welded 3" Tenon Included
- Welded Flange Base Included
- Anchor Bolts & Template Included
- Optional Decorative Cover  
(see measurements on page 76)
- Anchor Bolts & Template Included

### 4" SMOOTH ROUND ALUMINUM



.125" WALL THICKNESS



Round



F-Fluted



Bolt Circle Pattern  
For 4" Posts

Anchor Bolt 3/4" x 18"

ITEM #	DECORATIVE BASE	COLOR	OPTIONS
4688-8'	AB-American	BK-Black	HH*
4690-10'	DB-Decor	BZ-Bronze	
4692-12'	RB-Round Cover	WH-White	
4694-14'	VB-Victorian		

### 4" FLUTED ROUND ALUMINUM


.125" WALL THICKNESS

4688F-8'	AB-American	BK-Black	HH*
4690F-10'	DB-Decor	BZ-Bronze	
4692F-12'	RB-Round Cover	WH-White	
4694F-14'	VB-Victorian		

Call factory for custom lengths & colors. \*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (HH) Hand Hole and ground lug. 4690, 4692, 4694, 4690F, 4692F, and 4694F include Hand Hole unless otherwise specified. EPA ratings available on spec sheets and website. See suggested burial depth on page 64. Fits most 3" post top fixtures includes inlet hole. Specifications subject to change without notice. **See safety note on page 68.**

POSTS & ACCESSORIES

4" ROUND DIRECT BURIAL COMMERCIAL POSTS



TOTAL POST LENGTH	SUGG. BURIAL DEPTH
10'	24"
12'	24"
14'	30"

**SAFETY NOTES:** All surface mount posts are supplied with welded mounting base. Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.

GUIDE CODE: 4592-WH-HH



Direct Burial



- Powdercoated Aluminum
- Fits Most 3" Post Top Fixtures
- Welded 3" Tenon Included
- Includes Inlet Hole
- Decorative Bases Available (see page 76)

4" ROUND ALUMINUM  
.125" WALL THICKNESS

ITEM #	COLOR	OPTIONS
4590-10'	BK-Black	HH*
4592-12'	BZ-Bronze	
4594-14'	WH-White	

4" FLUTED ALUMINUM  
.125" WALL THICKNESS

4590F-10'	BK-Black	HH*
4592F-12'	BZ-Bronze	
4594F-14'	WH-White	

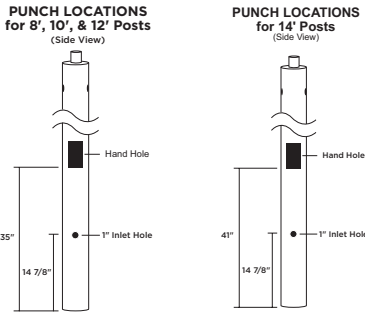

Call factory for custom lengths & colors. \*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (HH) Hand Hole and ground lug. 4592, 4594, 4592F, and 4594F include Hand Hole unless otherwise specified. EPA ratings available on spec sheets and website. Fits most 3" post top fixtures includes inlet hole. Specifications subject to change without notice.



## 4" SQUARE SURFACE MOUNTED COMMERCIAL POSTS




3" & 2-3/8"  
Tenons Available



Hand Hole With  
Cover Included



Post Cap  
Included



Flush Fit Bolt  
Covers Included

**GUIDE CODE: 5620-BZ-HH-N3**




## Surface Mounted

- Powdercoated Aluminum
- Welded Flange Base with Bolt Covers Included
- Anchor Bolts & Template Included
- Optional 3" or 2-3/8" Tenon
- Fits Most 3" Post Top Fixtures with 3" Tenon
- Bolt Circle: 9 inches

**4" SQUARE ALUMINUM**  
.188" WALL THICKNESS

HAND HOLE  
LOCATION  
(Side View)



ITEM #	COLOR	OPTIONS
5688-8'	BK-Black (special order)	HH*
5690-10'	BZ-Bronze	N2-2-3/8" OD Tenon (post cap not included w/tenon)
5692-12'	WH-White (special order)	N3-2-7/8" OD Tenon (post cap not included w/tenon)
5694-14'		
5696-16'		
5698-18'		
5620-20'		

Call factory for custom lengths & colors. \*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (HH) Hand Hole and ground lug. 5690, 5692, 5694, 5696, 5698, and 5620 include Hand Hole unless otherwise specified. EPA ratings available on spec sheets and website. Specifications subject to change without notice. **See safety note on page 70.** Use factory provided template for installation.

POSTS & ACCESSORIES

4" SQUARE DIRECT BURIAL COMMERCIAL POSTS



3" & 2-3/8" Tenons Available

Post Cap Included



Suggested Direct Burial Installation

	TOTAL POST LENGTH	SUGG. BURIAL DEPTH
	10'	24"
	12'	24"
	14'	30"
	16'	38"
	18'	48"
	20'	55"

**SAFETY NOTE:** Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.

GUIDE CODE: 5592-BZ-HH



Direct Burial


- Powdercoated Aluminum
- Optional 3" or 2-3/8" Tennon
- Fits Most 3" Post Top Fixtures with 3" Tennon
- Includes Inlet Hole

4" SQUARE ALUMINUM  
.188" WALL THICKNESS


ITEM #	COLOR	OPTIONS
5588-8'	BK-Black (special order) BZ-Bronze WH-White (special order)	HH* N2-2-3/8" OD Tenon (post cap not included w/tenon) N3-2-7/8" OD Tenon (post cap not included w/tenon)
5590-10'		
5592-12'		
5594-14'		
5596-16'		
5598-18'		
5520-20'		

Call factory for custom lengths & colors. \*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (HH) Hand Hole and ground lug. 5592 and 5594 include Hand Hole unless otherwise specified. EPA ratings available on spec sheets and website. Specifications subject to change without notice.


PUNCH LOCATIONS for 8', 10', & 12' Posts (Side View)




PUNCH LOCATIONS for 14' Posts (Side View)




PUNCH LOCATIONS for 16' Posts (Side View)





PUNCH LOCATIONS for 18' Posts (Side View)



PUNCH LOCATIONS for 20' Posts (Side View)



## 3" ROUND SURFACE MOUNTED LIGHT COMMERCIAL POSTS



**PLEASE NOTE: YOU MUST SPECIFY BASE AND COVER TYPE WHEN ORDERING TO RECEIVE BASE AND COVER**



## Surface Mounted


- Powdercoated Aluminum
- Fits Most 3" Post Top Fixtures
- Light Duty & Heavy Duty Bases Available
- Optional Covers Available (*see measurements on page 77*)
- Anchor Bolts & Template Included

### 3" ROUND ALUMINUM .072" WALL THICKNESS

ITEM #	BASE & COVER TYPE	COLOR	120V OPTIONS
<b>2600</b> -8'	<b>ST</b> -Standard Base ( <i>8' &amp; 10' Posts Only</i> )	<b>BK</b> -Black	<b>C</b> -Conv. Outlet (338)
<b>2610</b> -10'	<b>STV</b> -ST Base w/Cover ( <i>8' &amp; 10' Posts Only</i> )	<b>BZ</b> -Bronze	<b>320</b> -Ezee Change Photo Control
<b>2612</b> -12'	<b>HD</b> -Heavy Duty Base	<b>WH</b> -White	<b>HH</b> *
	<b>HDV</b> -HD Base w/Cover		

### 3" ROUND ALUMINUM .125" WALL THICKNESS

<b>2690</b> -10'	<b>HD</b> -Heavy Duty Base	<b>BK</b> -Black	<b>C</b> -Conv. Outlet (338)
<b>2692</b> -12'	<b>HDV</b> -HD Base w/Cover	<b>BZ</b> -Bronze	<b>320</b> -Ezee Change Photo Control
		<b>WH</b> -White	<b>HH</b> *



**GUIDE CODE: 2692-HDV-BK-HH**

Call factory for custom lengths & colors. \*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (HH) Hand Hole and ground lug. 2600, 2610, 2612, 2690, and 2692 include Hand Hole unless otherwise specified. EPA ratings available on spec sheets and website. Specifications subject to change without notice. **See safety note on page 72.**



POSTS & ACCESSORIES

3" ROUND DIRECT BURIAL LIGHT COMMERCIAL POSTS



Suggested Direct Burial Installation

	TOTAL POST LENGTH	SUGG. BURIAL DEPTH
	8'	18"
	10'	24"
	12'	24"
	14'	30"

**SAFETY NOTE:** Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.




GUIDE CODE: 2510-BK-320-HH




Direct Burial

- Powdercoated Aluminum
- Fits Most 3" Post Top Fixtures
- Includes Inlet Hole
- See Page 76 & 77 for Base Options


Handhole Location for 7' & 8' Posts (Side View)



Handhole Location for 10' & 12' Posts (Side View)



PUNCH LOCATIONS for 14' Posts (Side View)



3" ROUND ALUMINUM  
.072" WALL THICKNESS

ITEM #	COLOR	120V OPTIONS
2500-8' 2510-10' 2512-12' 2514-14'	BK-Black BZ-Bronze WH-White	C-Conv. Outlet (338) 320-Ezee Change Photo Control HH*

Call factory for custom lengths & colors. \*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (HH) Hand Hole and ground lug. 2510, 2512, and 2514 include Hand Hole unless otherwise specified. EPA ratings available on spec sheets and website. Specifications subject to change without notice.



## 3" ROUND SURFACE MOUNTED LIGHT COMMERCIAL POSTS



## Light Commercial Posts

- Powdercoated Aluminum
- Fits Most Standard 3" Post Top Fixtures
- 2 Piece Snap Together System, No Tools Required
- Anchor Bolts & Template Included

ITEM #	COLOR
C6P2-6' C8P2- 8' C10P2-10'	BK-Black

**NOTE:** Includes anchor bolts and templates. Post and Base are two piece interlocking system that may ship separately. Post and Base come as kit and cannot be sold separately.


**SAFETY NOTE:** Selecting posts for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting these items is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post or electrical accessory without getting such assistance, you do so at your own risk.

POSTS & ACCESSORIES

3" ROUND DIRECT BURIAL RESIDENTIAL POSTS



Shown with 2420  
Decorative Base



TOTAL POST LENGTH	SUGG. BURIAL DEPTH
7'	18"
8'	18"
10'	24"

**SAFETY NOTE:** Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.



**BZ-BRONZE**  
Shown with 320 Photocell  
& 335 Crossarm



**BK-BLACK**  
Shown NCA style



**WH-WHITE**  
Shown with 338 Convenience  
Outlet & 335 Crossarm

POST ACCESSORIES SHOWN ABOVE



320



338



335

GUIDE CODE: 295-C320-WH

Direct Burial

- Crossarm Included Unless Otherwise Specified
- Powdercoated Aluminum
- Fits Most 3" Post Top Fixtures
- Includes Inlet Hole
- See Page 76 & 77 for Decorative Bases

POST DIMENSIONS: O.D. = 2.950", I.D. = 2.850", WALL = .050"

ITEM #	120V OPTIONS	COLOR
295-7'	C-Conv. Outlet (338)	BK-Black
293-8'	320-Ezee Change Photo Control	BZ-Bronze
294-10'	NCA-No Cross Arm	WH-White

## 3" ROUND SURFACE MOUNTED RESIDENTIAL POSTS





(STP shown as NCA version)



(STV shown with crossarm)



(ST shown as NCA version)



**PLEASE NOTE: YOU MUST SPECIFY BASE AND COVER TYPE WHEN ORDERING TO RECEIVE BASE AND COVER**



**GUIDE CODE: 285-STP-C320-BK**

## Surface Mounted

- Crossarm Included Unless Otherwise Specified
- Powdercoated Aluminum
- Fits Most 3" Post Top Fixtures
- Surface Mount Base Included
- Optional Covers Available (*see measurements on page 77*)
- Anchor Bolts & Template Included

POST DIMENSIONS: O.D. = 2.950", I.D. = 2.850", WALL = .050"

ITEM #	BASE & COVER TYPE	120V OPTIONS	COLOR
285-6'	ST-Standard Base	C-Conv. Outlet (338)	BK-Black
283-8'	STV-ST Base w/Cover	320-Ezee Change Photo Control	BZ-Bronze
	STP-Polyethylene Base (black only)	NCA-No Cross Arm	WH-White

**NOTE:** Posts with Crossarm, Photo Control, or Convenience Outlet come pre-punched for installation. Minor assembly required.

**SAFETY NOTE:** Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.



## Commercial Post Accessories

### CAST ALUMINUM BRACKETS



**PB5**  
I.D. = 3"

- Post Bracket Pre-Wired W/20" Pigtail for Easy Installation With 3" Post Mount Fixture
- Designed to Mount to Wave Lighting's .125" Wall Thickness Posts
- PB5-CAP Included
- Max. Fixture Width: 16"
- H = 9.5", W = 4.5", E = 16.5"
- Powdercoated Finish
- Specify: **(BK)** Black **(WH)** White or **(BZ)** Bronze



**PB5-2**  
I.D. = 3"

- Post Bracket Pre-Wired W/20" Pigtail for Easy Installation With 3" Post
- Designed to Mount to Wave Lighting's .125" Wall Thickness Posts
- PB5-CAP Included.
- Max. Fixture Width: 16"
- H = 9.5", W = 4.5", E = 29"
- Powdercoated Finish
- Specify: **(BK)** Black **(WH)** White or **(BZ)** Bronze



**PB5-3**  
I.D. = 3"

- Post Bracket Pre-Wired W/20" Pigtail for Easy Installation With 3" Post
- Designed to Mount to Wave Lighting's .125" Wall Thickness Posts
- Max. Fixture Width: 14"
- H = 9", W = 4.5", E = 29"
- Powdercoated Finish
- Specify: **(BK)** Black **(WH)** White or **(BZ)** Bronze



**CAP-PB5**  
I.D. = 3"

- Cap for 3" Post
- Powdercoated Finish
- Specify: **(BK)** Black **(WH)** White or **(BZ)** Bronze

Black, white & bronze color options



### CAST ALUMINUM FITTERS

- Powdercoated Finish
- Fits Most 3" Poles
- Cast Aluminum Fitters Come Standard with 4KV Medium Base Porcelain Socket
- Specify Option: **(MG)** Mogul Socket
- Specify: **(BK)** Black, **(BZ)** Bronze or **(WH)** White



**1784**  
I.D. = 3.0"


- Style A Fitter for Globes & Acorns with 8" Neck
- H = 11", W = 10.25"



**1785**  
I.D. = 3.0"

- Style B Fitter for Globes & Acorns with 8" Neck
- H = 10.5", W = 10.25"


### HAND HOLE COVERS



4.75"

HH

- 3" x 4.75" Hand Hole Cover for 3" posts (includes tamper-proof mounting hardware)
- Specify: **(BK)** Black **(WH)** White or **(BZ)** Bronze



4.75"

HH4

- 4" x 4.75" Hand Hole Cover for 4" posts (includes tamper-proof mounting hardware)
- Specify: **(BK)** Black **(WH)** White or **(BZ)** Bronze

### CAST ALUMINUM DECORATIVE BASE COVERS

FOR MOST 3" DIAMETER POSTS



**3BC1**  
Dia.: 13.125"  
Height: 24.125"



**3BC2**  
Dia.: 11.5"  
Height: 13.625"



**3BC3**  
Dia.: 11"  
Height: 26.375"



**3BC6**  
Dia.: 11"  
Height: 9.625"



**3BC9**  
Dia.: 10"  
Height: 3.5"  
Top I.D.: 4.125"

FOR MOST 4" DIAMETER POSTS



**4BC1**  
Dia.: 15"  
Height: 27.625"



**4BC3**  
Dia.: 12.125"  
Height: 29"



**4BC6**  
Dia.: 12"  
Height: 9.625"






**4BC9**  
Dia.: 11"  
Height: 3.5"  
Top I.D.: 5.375"

Decorative Base Covers come as a two piece system, and can be installed over existing Surface Mounted Posts. **3BC9** and **4BC9** are one piece system. Base Covers are available with a powdercoated finish, must specify **(BK)** Black, **(BZ)** Bronze or **(WH)** White.



# Residential Post Accessories

## CAST ALUMINUM & POLYCARBONATE POST TOP FITTERS

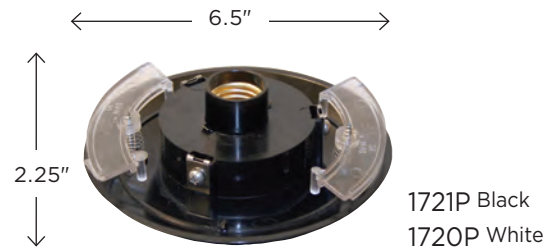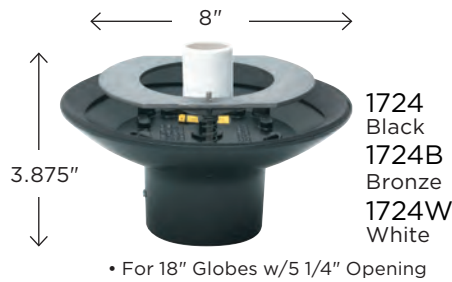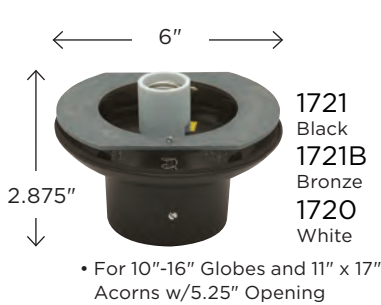

### DIE CAST ALUMINUM

- E26 Medium Base 4KV
- Porcelain Socket
- Specify Option: **(MG)** Mogul Socket
- For Up to 18" Globes
- Powdercoated Finish
- I.D. = 3"

Black, white & bronze color options




### POLYCARBONATE


- E26 Medium Base
- Phenolic Socket
- For 10"-16" Globes with 5 1/4" Opening
- I.D. = 3"




## SURFACE MOUNT BASES & COVERS

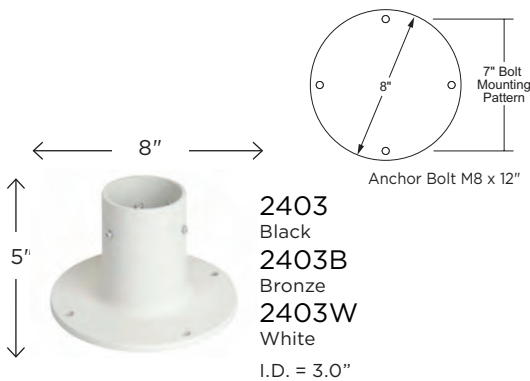

- Light Duty Aluminum Surface Mount Base
- Powdercoated Finish
- Anchor Bolts & Template Included
- For use up to 10'

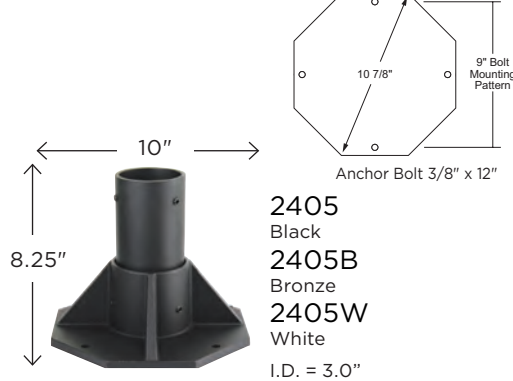

- Heavy Duty Aluminum Surface Mount Base
- Powdercoated Finish
- Anchor Bolts & Template Included
- For use up to 12'

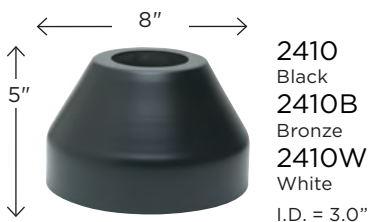

- Spun Aluminum Base Cover for 2403
- Powdercoated Finish



- Spun Aluminum Base Cover for 2405
- Powdercoated Finish

### SLIP-ON POLYMER DECORATIVE POST COVER




- Polyethylene Decorative Slip On Base Cover for Standard 3" Post
- I.D. = 3"
- Available in black only
- No Hardware Needed

## Residential Post Accessories

### POST FIXTURE ADAPTORS

←2.950"→




**348**  
Black  
**348BZ**  
Bronze  
**348WH**  
White

Stub Post

- Custom Length 3" Stub Post for use with **347** Surface Mount Adaptor
- .050" Wall Thickness
- Length: (XX) must be in 6" intervals Example Part Number: **348-12**
- Max Length 104"

ADD 320 OR 338 FOR ADDITIONAL FUNCTIONALITY!

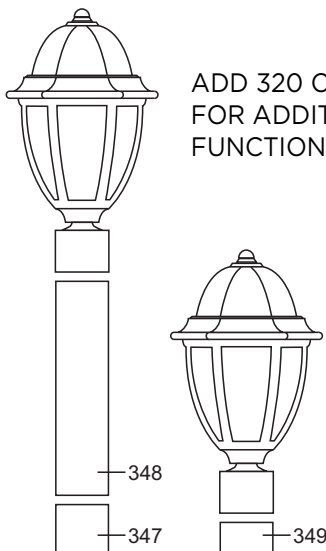

CP-689

←2.6875"→



**347**  
Black  
**347B**  
Bronze  
**347W**  
White  
I.D. = 2.42"  
O.D. = 2.83"


- Pier Mount Adaptor for use with 348 Stub Post

← 2.875" →



**349**  
Black  
**349B**  
Bronze  
**349W**  
White  
I.D. = 2.38"  
O.D. = 2.95"

- Pier Mount Adaptor for 3" Post Mount Fixtures



### POST ACCESSORIES




- 15" Aluminum Crossarm with Gold End Caps
- 3/4" Dia. mounting hole required

**335**  
Black  
**335B**  
Bronze  
**335W**  
White



**0500662**  
Black  
**0500663**  
White  
• Crossarm Plugs for 3/4" Dia. hole

← 3" →



O.D. = 2.93"  
I.D. = 2.93"


CP-689 Photocell Adaptor

- 688 120V Photo Control in hardware bag (assembly required) with Adaptor for 3" Posts
- Not for use with commercial fixtures
- Available in black only
- Up to 300W Incandescent, 60W LED, 39W Fluorescent, & 100W H.I.D.

### PHOTOCONTROLS & OUTLETS FOR POST APPLICATIONS



←1.75"→

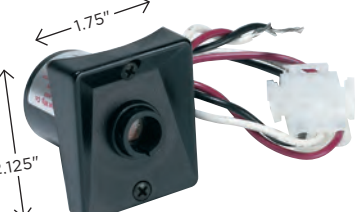

**320**  
Black  
**320Z**  
Bronze  
**320W**  
White

- 120V for 3" Post with Eze Change Plug
- 1.375" Dia. mounting hole required
- Up to 300W Incandescent, 60W LED, 39W Fluorescent, & 100W H.I.D.


←1.125"→



**688**

- 120V Button Photo Control
- .6875" Dia. mounting hole required
- Up to 300W Incandescent, 60W LED, 39W Fluorescent, & 100W H.I.D.
- Available in black only

← 2" →



**338**  
Black  
**338B**  
Bronze  
**338W**  
White

- 120V Grounded Convenience Outlet
- 1.375" Dia. mounting hole required
- Polycarbonate housing

SEE SAFETY NOTE ON PAGE 66





LRC


LRH6  
RETROFIT

LRC  
RETROFIT




LED RETROFITS

- Easily Convert Existing Fixtures to LED with UL 1598C Classified Kits
  - Estimated 50,000 hrs L70
- TRIAC Dimmable To 5% (forward & reverse phase)
  - 5 Year Limited Warranty
- Energy Star CSD
  - Mounting Hardware Included

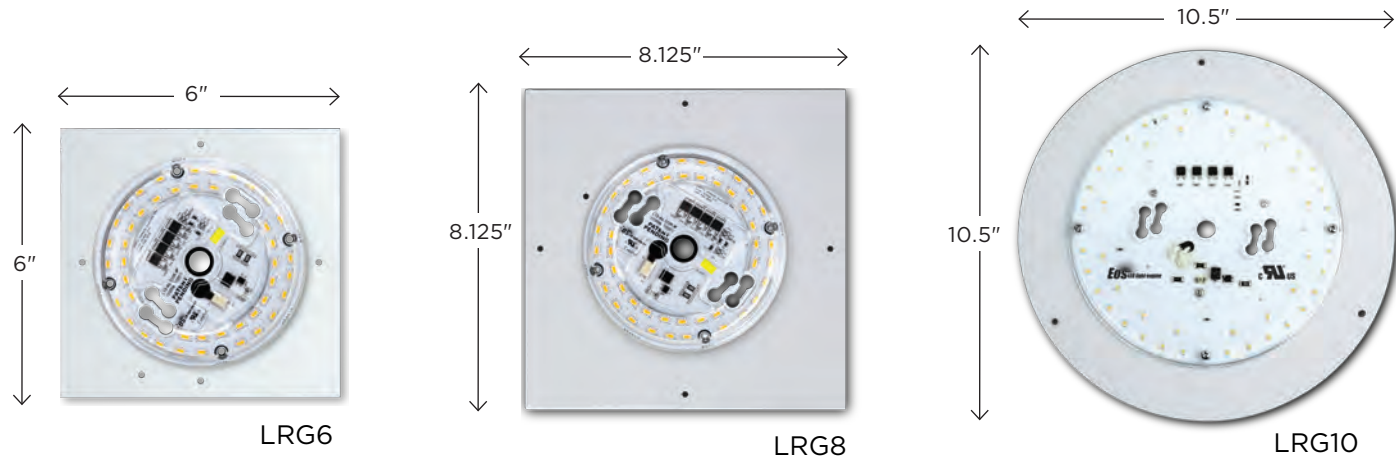

GUIDE CODE: LRG6-LR12C

ITEM #	LIGHT SOURCE	CCT
LRG6	120V LIGHTWAVE LED	C-4K
LRG8	LR12-13W 1000lm 80CRI ★	W-3K
LRG10	LR15-15W 1400lm 80CRI ★	
	LR22-23W 1900lm 80CRI ★	
	LT12-12W 1040lm 90CRI	
	LT15-16W 1400lm 90CRI	
	LT22-24W 2020lm 90CRI	
	LR32-32W 2700lm 80CRI (LRG10 only) ★	
	LT32-32W 2700lm 90CRI (LRG10 only)	

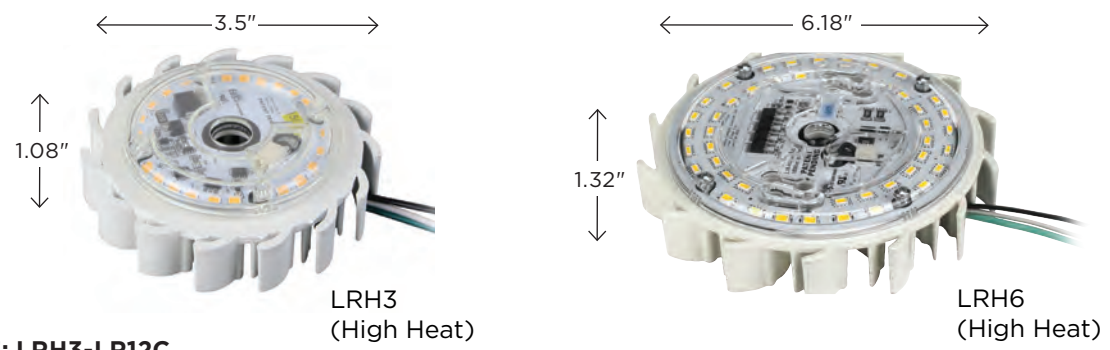

GUIDE CODE: LRH3-LR12C


ITEM #	LIGHT SOURCE	CCT
LRH3	120V LIGHTWAVE LED	C-4K
	LR12-13W 1000lm 80CRI ★	W-3K
	LT12-12W 1040lm 90CRI	
LRH6	LR15-15W 1400lm 80CRI ★	
	LR22-23W 1900lm 80CRI ★	
	LT15-16W 1400lm 90CRI	
	LT22-24W 2020lm 90CRI	

★Energy Star CSD product. Spec sheets and IES files available online. Specifications subject to change without notice.



## COMMERCIAL RETROFIT KITS

For Acorn &amp; Globe Fixtures

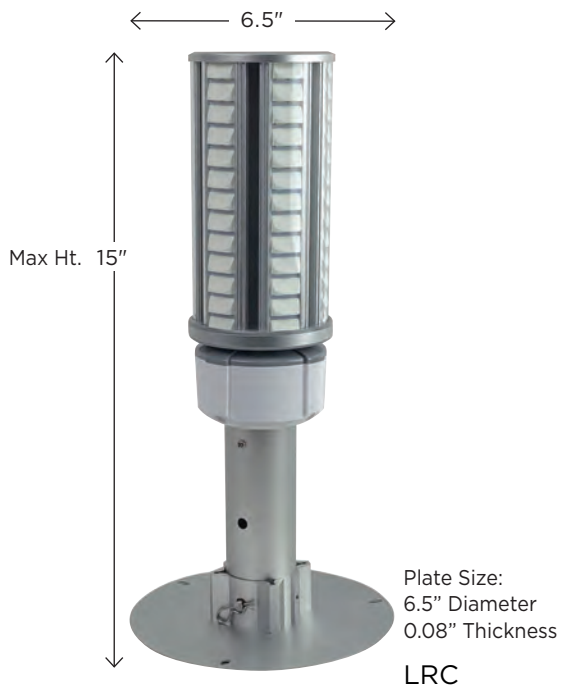

- For Enclosed Fixtures
- Input Voltage: 120-277VAC, 50/60hz
- Surge Protection
- Replaces Up To 250W Metal Halide
- Telescoping Bracket
- Universal Mounting Plate

- 3000K or 4000K, CRI 80
- 0-10V Dimming
- Estimated 50,000 hrs L80
- 5 Year Limited Warranty
- Dark Sky Friendly
- UL 1598C Classified

SCAN FOR  
VIDEO

## GUIDE CODE: LRC-L40C

ITEM #	LIGHT SOURCE	CCT
LRC	<b>RETROFIT LED 120-277V</b>	<b>C-4K</b> <b>W-3K</b>
	<b>L40-40W 4000lm</b>	
	<b>L60-54W 5700lm</b>	

Spec sheets and IES files available online. Specifications subject to change without notice.



## E26 Medium Base Lamps For Enclosed Fixtures



4.375"



### LCE26-9W

- A19 LED Lamp
- 9.5 Watt, 3000K, 800lm, 90CRI
- 120v, 50/60Hz
- Replaces up to 60W
- E26 MEDIUM BASE
- Surge Protection
- Dimmable
- 15,000 Hrs L70
- 3 Year Limited Warranty
- Energy Star Certified
- Title 24 Compliant
- UL Listed

← 2.375" →



4.375"

### LCE26-9C

- A19 LED Lamp
- 9.5 Watt, 4000K, 800lm, 80CRI
- 120v, 50/60Hz
- Replaces up to 60W
- E26 MEDIUM BASE
- Surge Protection
- Dimmable
- 15,000 Hrs L70
- 3 Year Limited Warranty
- Energy Star Certified
- UL Listed

← 2.25" →



4.75"



### LCE26-12A-T5

- Amber LED Lamp
- 11 Watt, 1387K, 336lm, 596nm
- 120-277v, 50/60Hz
- 50,000 Hrs L70
- 5 Year Limited Warranty
- UL Listed
- FWC Compliant
- Non-Dimmable

## E39 Mogul Base Lamps For Commercial & Light Commercial Fixtures

- For Enclosed Fixtures
- Input Voltage: 120-277VAC, 50/60hz
- Replaces Up to 250W Metal Halide
- Non-Dimmable

- Type 3, Type 5, & Dark Sky Models Available
- 4000K, CRI 80
- Estimated 50,000 hrs L70
- 5 Year Limited Warranty



← 2.5" →



7.5"

### LCE39-24C-T5

- Type 5 LED Lamp
- 24Watt, 4000K, 3120lm
- Replaces up to 100W MH
- 360° Beam Angle

← 3.625" →




6.125"

### LCE39-20C-T3

- Type 3 LED Lamp
- 20Watt, 4000K, 3120lm
- Replaces up to 100W MH
- 180° Adjustable Beam Angle

← 2.5" →



8"

### LCE39-24C-DS

- Dark Sky LED Lamp
- 24Watt, 4000K, 2400lm
- Replaces up to 100W MH
- 180° Down Beam Angle

← 3.375" →




9.75"

### LCE39-54C-T5

- Type 5 LED Lamp
- 54Watt, 4000K, 7290lm
- Replaces up to 250W MH
- 360° Beam Angle

← 3.5" →



10.5"

### LCE39-40C-T3

- Type 3 LED Lamp
- 40Watt, 4000K, 5600lm
- Replaces up to 250W MH
- 180° Adjustable Beam Angle

← 3.5" →



10.5"

### LCE39-54C-DS

- Dark Sky LED Lamp
- 54Watt, 4000K, 5900lm
- Replaces up to 250W MH
- 180° Down Beam Angle



Spec sheets and IES files available online. Specifications subject to change without notice.



# REPLACEMENTS

---

Replacement Lenses & Diffusers	84
Replacement Globes & Acorns	85



# Residential Replacements

## LENSES & DIFFUSERS

### 544XF-LENS

Frosted  
Use with 544VF,  
544HCF, & 544TF

### 544SF-LENS

Frosted  
Use with 544SF

### 549VF-LENS

Frosted  
Use with 549VF

### 549SF-LENS

Frosted  
use with 549SF

### 561FMF-LENS


Frosted  
Use with 561FMF

### C200BC-LENS

Frosted  
Use with C200BC

### 502XF-LENS

Frosted  
Use with 502SF &  
502VF



### COLONIAL, SAXONY & VANGUARD WALL MOUNT


ACRYLIC

144 - Clear Bvl Dia (shown)

145 - Amber Bvl Dia

146 - Clear Bvl

147 - Frosted Bvl



### COLONIAL, SAXONY & VANGUARD POST TOP


ACRYLIC

148 - Clear Bvl

149 - Frosted Bvl

153 - Amber Bvl Dia (shown)

154 - Clear Bvl Dia




### COMPANION SIZE EVERSTONE™ LANTERNS

ACRYLIC

1301724 - Clear

1301726 - Frosted (shown)




### FULL SIZE EVERSTONE™ LANTERNS

ACRYLIC

1301733 - Clear

1301734 - Frosted (shown)



### WALL PACK EVERSTONE™ LANTERNS

ACRYLIC

1301727 - Clear Prismatic (shown)

1301728 - Opal



### LANTERN CHIMNEY

GLASS

1300316 - Frosted 2.875" btm. width

PLASTIC

1300316P - Plastic 2.875" btm. width



### VICTORIAN LANTERN

ACRYLIC

1300371 - Opal (shown)

1300372 - Black



### VICTORIAN LANTERN

ACRYLIC

1300373 - Clear Lens w/Trim Ring

(sold assembled)

## GLOBES & ACORNS W/5 1/4" NECKLESS OPENING



### CLEAR POLYCARBONATE

1256-12"

1456-14"

1656-16"

1856-18"

ACRYLIC

1066-10"

1266-12"

1466-14"

1666-16"

1866-18"



### OPAL POLYCARBONATE

1255-12"

1455-14"

1655-16"

1855-18"

ACRYLIC


1065-10"

1265-12"

1465-14"

1665-16"

1865-18"



### SMOKE POLYCARBONATE

1258-12"

1458-14"

1658-16"

1858-18"

ACRYLIC

1068-10"

1268-12"

1468-14"

1668-16"

1868-18"



### CLEAR PRISMATIC POLYCARBONATE

1859-18"

ACRYLIC

1069-10"

1269-12"

1669-16"

1869-18"



### CLEAR TEXTURED POLYCARBONATE

1756-For 2017CL

ACRYLIC

1766-For 8017CL

OPAL TEXTURED

POLYETHYLENE

1776-For 9017



### CLEAR TEXTURED POLYCARBONATE

2067-For 2018CL

ACRYLIC

2057-For 8018CL

OPAL TEXTURED

POLYETHYLENE

2077-For 9018

## GLOBES & ACORNS W/4" FITTER NECK



ACRYLIC

0800407-8" Clear

0800408-8" Opal



ACRYLIC

0800411-12" Clear

0800410-12" Opal



POLYCARBONATE

1467-Clear







### SUGGESTED MAX WATTAGES

SIZE	ACRYLIC			POLYCARBONATE			POLYETHYLENE		
	INC.	FLUOR.	H.I.D.	INC.	FLUOR.	H.I.D.	INC.	FLUOR.	H.I.D.
GLOBES									
10"	75W	18W	--	--	18W	--	--	--	--
12"	100W	26W	--	100W	26W	--	--	--	--
14"	150W	32W	--	150W	32W	--	--	--	--
16"	150W	32W	70W	150W	32W	70W	--	--	--
18"	150W	32W	100W	150W	32W	100W	--	--	--
ACORNS									
1756	--	--	--	150W	32W	70W	--	--	--
2067	--	--	--	150W	32W	70W	--	--	--

Suggested Max Wattages is for use as a general reference chart only. No warranty or guarantee is expressed or implied, as product suitability is determined by installation.

# Commercial Replacements

## ACRYLIC LENSES



## 8" FITTER NECK OPENING GLOBES



## 8" FITTER NECK OPENING ACORNS



### SUGGESTED MAX WATTAGES

SIZE	ACRYLIC		POLYCARBONATE	
	INC.	H.I.D.	INC.	H.I.D.
GLOBES				
18"	150W	100W	150W	250W
20"	150W	150W	150W	250W
ACORNS				
0801390	--	--	150W	250W
0801391	--	--	150W	250W
0801392	--	--	150W	250W
3467	--	--	150W	250W

Suggested Max Wattages is for use as a general reference chart only. No warranty or guarantee is expressed or implied, as product suitability is determined by installation. 24", 27", 30" & 36" globes available. Contact Sales with Questions. \*For Finial - SPECIFY: (DR) Drill Hole \*\*For Hood - SPECIFY: (TR) Trim Top for C91 and C92



# NUMERICAL INDEX

ITEM #	PAGE	ITEM #	PAGE	ITEM #	PAGE	ITEM #	PAGE
AFB	17	HH4	76	S772WF	36	182FM	62
CP-689	78	LCE26	82	S77WF	37	183FM	62
C6P2	73	LCE39	82	S791WF	36	184FM	62
C8P2	73	LRC	81	S79WF	37	185FM	62
C10P2	73	LRG10	80	3BC1	76	190FM	61
C30T	12	LRG6	80	3BC2	76	192FM	61
C31T	12	LRG8	80	3BC3	76	193FM	61
C31T(P/L)-LENS	85	LRH3	80	3BC6	76	195FM	61
C32T	14	LRH6	80	3BC9	76	204S	41
C32T(P/L)-LENS	85	PB5	76	4BC1	76	204T	41
C33T	14	PB5-2	76	4BC3	76	204V	41
C33T(P/L)-LENS	85	PB5-3	76	4BC6	76	206VC	40
C36T	15	CAP-PB5	76	4BC9	76	208	40
C36T(C/L)-LENS	85	S11S	27	100FM	47	209	45
C37T	15	S11T	27	110	52, 56	210	45
C37T(C/L)-LENS	85	S11V	27	111	50	211	45
C39T	13	S21S	26	112	50	212	45
C40T	11	S21T	26	113	50	215	45
C41T	11	S21V	26	114	50	216	45
C42S	10	S26S	28	115	52, 56	217	45
C42T	10	S26T	29	116	52, 56	220FM	38
C59T	14	S26V	28	123	50	220S	42
C59TF-LENS	85	S27SC	28	124	51	220T	42
C75T	19	S27TC	29	144	84	230FM	38
C76T	19	S32W	28	145	84	230S	39
C77T	18	S33W	30	146	84	230T	39
C78T	18	S34W	31	147	84	240S	43
C83T	17	S35W	31	148	84	240T	43
C84T	17	S36W	31	149	84	240V	43
C85T	17	S50S	32	153	84	241V	38
C86T	17	S50T	32	154	84	260S	39
C91T	16	S50V	32	155FM	62	260T	39
C92T	16	S51S	33	156FM	44	263FM	48
C93T	16	S51T	33	157FM	44	264FM	48
C94T	16	S51V	33	160FM	63	265FM	48
C200B	22	S52T	33	161FM	63	266FM	46
C200BC-LENS	84	S52V	33	162FM	63	270S	42
C201B	22	S64FM	24	163FM	63	270T	42
C202B	23	S64W	24	164FM	47	283	75
C203B	23	S65W	24	165FM	47	285	75
C2014T	20	S75TC	34	166FM	24	293	74
C2015T	21	S75TC-1	35	167FM	44	294	74
C2024T	20	S75TC-2	35	168FM	60	295	74
C2025T	21	S75TL-1	35	169FM	24	320	78
C8014T	20	S75TL-2	35	170FM	63	335	78
C8015T	21	S75V	34	172FM	63	338	78
C8024T	20	S761WF	36	178FM	60	347	78
C8025T	21	S76WF	37	180FM	62	348	78
HH	76	S771WF	37	181FM	62	349	78

# NUMERICAL INDEX

ITEM #	PAGE	ITEM #	PAGE	ITEM #	PAGE	ITEM #	PAGE
409	53, 57	1776	84	2692	71	8003	55
410	53, 57	1784	76	3467	85	8004	55
411	51	1785	76	3468	85	8017	54
412	51	1855	84	3469	85	8018	54
420	49	1855-8N	85	3588	66	9017	54
421	49	1856	84	3588F	66	9018	54
422	49	1856-8N	85	3590	66	0500662	78
530V	46	1858	84	3590F	66	0500663	78
609	53, 57	1858-8N	85	3592	66	0800407	84
610	53, 57	1859	84	3592F	66	0800408	84
611	51	1859-8N	85	3594	66	0800410	84
612	51	1865	84	3594F	66	0800411	84
688	78	1865-8N	85	3688	65	0801390	85
785	45	1866	84	3688F	65	0801391	85
1065	84	1866-8N	85	3690	65	0801392	85
1066	84	1868	84	3690F	65	0801400	85
1068	84	1868-8N	85	3692	65	0801401	85
1069	84	1869	84	3692F	65	0801402	85
1255	84	1869-8N	85	4590	68	0801410	85
1256	84	2001	55	4590F	68	0801411	85
1258	84	2002	55	4592	68	0801420	85
1265	84	2003	55	4592F	68	0801421	85
1266	84	2004	55	4594	68	0801422	85
1268	84	2017	54	4594F	68	1300316	84
1269	84	2018	54	4688	67	1300371	84
1455	84	2055-8N	85	4688F	67	1300372	84
1456	84	2056-8N	85	4690	67	1300373	84
1458	84	2057	84	4690F	67	1301724	84
1465	84	2058-8N	85	4692	67	1301726	84
1466	84	2059-8N	85	4692F	67	1301727	84
1467	84	2065-8N	85	4694	67	1301728	84
1468	84	2066-8N	85	4694F	67	1301733	84
1655	84	2067	84	5520	70	1301734	84
1656	84	2068-8N	85	5588	70		
1658	84	2069-8N	85	5590	70		
1665	84	2077	84	5592	70		
1666	84	2403	77	5594	70		
1668	84	2405	77	5596	70		
1669	84	2410	77	5598	70		
1720	77	2411	77	5620	69		
1720P	77	2420	77	5688	69		
1721	77	2500	72	5690	69		
1721B	77	2510	72	5692	69		
1721P	77	2512	72	5694	69		
1724	77	2514	72	5696	69		
1724B	77	2600	71	5698	69		
1724W	77	2610	71	8000	55		
1756	84	2612	71	8001	55		
1766	84	2690	71	8002	55		



wavelighting.com  
877.870.WAVE (9283)  
fax 330.630.1994