

## Product Icon Key



Energy Star® Models Available



LED Models Available



Photocell Option Available



Dark Sky Friendly Options Available



Turtle Friendly Models



Meets Buy American Act Requirements



Non-Corrosive Oceanside® Approved Models



Meets Americans with Disabilities Act Requirements



IP65 Rated Item

**RoHS**  
compliant

Meets RoHS Requirements



ETL Listed Item



Listed for Damp Locations



Listed for Direct Rain Wet Locations



UL® Listed Item



Occupancy Sensor Option Available



90 CRI



Energy Codes

# COMMERCIAL LIGHTING

## Commercial Area & Main Street





Wave Lighting proudly offers a wide variety of commercial lighting fixtures. All of our fixtures are constructed with the industry's finest materials and may be modified with a vast array of options from Type 5, Type 3, and Dark Sky distributions; color options, and decorative finials.

Wave Lighting's commercial product line provides safety and security for all types of applications including parks, pedestrian walkways, streets and parking areas.

Contemporary	10-11
Town Hall	12-13
Riverwalk	14
High Street	15
Park Place	16-21
Walkway	22-23
Cylinder	24
Citadel	24



COMMERCIAL LIGHTING



Contemporary LED Commercial System

- Cast Aluminum
- 0-10V Dimming Options
- T3 Options (Type 5 standard)

GUIDE CODE: C42TC-L40C -BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C42S C42T	GLASS C-Clear	120-277V DEDICATED LED		BK-Black BZ-Bronze WH-White	T3-Type 3 Distribution (Type 5 Standard)
		L40-40W 4000lm L60-60W 6000lm	C-4K W-3K B-5K		

Options cannot be combined. Spec sheets and IES files available online. Specifications subject to change without notice.  
LED option information on page 5. All posts and post options sold separately.







## Contemporary LED Commercial System

- Aluminum Housing
- 0-10V Dimming Options
- T3 Options (Type 5 standard)

GUIDE CODE: C40TL-L40C-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C40T	ACRYLIC L-Opal Drop Lens FF-Frost Flat Lens	120-277V DEDICATED LED		BK-Black BZ-Bronze WH-White	T3-Type 3 Distribution (Type 5 Standard)
		L40-30W 4000lm L60-40W 6000lm L80-60W 9000lm	C-4K W-3K B-5K		
C41T	GLASS C-Clear Lens	L40-40W 3500lm L80-85W 6100lm	C-4K		

Options cannot be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately.





Town Hall LED Commercial System

- Aluminum Housing
- 0-10V Dimming Options
- T3 Options (Type 5 standard)

GUIDE CODE: C30TC-L40C-BK-T3

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C30T	GLASS COVER C-Clear	120-277V DEDICATED LED		BK-Black BZ-Bronze WH-White	T3-Type 3 Distribution (Dedicated LED Only, T3 is Special Order, Type 5 Standard)
		L40-40W 4000lm L80-60W 6000lm	C-4K (standard)		
C31T	ACRYLIC L-Opal P-Clear Prism	E26 MEDIUM BASE		BK-Black BZ-Bronze WH-White	MG-E39 Mogul Socket BP1-One Panel BP2-Two Panels BP3-Three Panels T3-Type 3 Distribution (Dedicated LED Only, T3 is Special Order, Type 5 Standard)
		(1) 200W MAX Medium Base			
		120-277V DEDICATED LED			
		L40-30W 4000lm L60-40W 6000lm CCT L80-60W 9000lm	C-4K W-3K B-5K		
		E39 RETRO-FIT LED 120-277V			
		LC5-27W 3120lm, Type 5 + LC3-20W 3000lm, Type 3 + LCD-24W 2400lm, Dark Sky +	C-4K (standard)		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included





## Town Hall LED Commercial System

- LED Retro-Fit Available
- Aluminum Construction
- Photocell Included

**GUIDE CODE: C39TF-BK**

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR
C39T	ACRYLIC F-Frosted	<b>INCANDESCENT</b>		BK-Black
		(1) 200W MAX Mogul Base		
		<b>E39 RETRO-FIT LED 120-277V</b>		
		LC5-54W 7290lm, Type 5 + LC3-40W 5600lm, Type 3 +	C-4K (standard)	

Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included



# COMMERCIAL LIGHTING



## Riverwalk LED Commercial System

- Cast Aluminum
- 0-10V Dimming Options
- Dedicated LED & LED Retro-Fit Available
- T3 Options (Type 5 standard)

GUIDE CODE: C32TP-L40C-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C32T C33T	ACRYLIC L-Opal P-Clear Prism	<b>E26 MEDIUM BASE</b> (1) 200W MAX Medium Base		BK-Black BZ-Bronze WH-White	<b>MG-E39</b> Mogul Socket <b>BP1</b> -One Panel <b>BP2</b> -Two Panels <b>BP3</b> -Three Panels <b>T3</b> -Type 3 Distribution (Dedicated LED Only, T3 is Special Order, Type 5 Standard)
C59T	GLASS F-Frosted	<b>120-277V DEDICATED LED</b>			
		<b>L40</b> -30W 4000lm <b>L60</b> -40W 6000lm <b>L80</b> -60W 9000lm	<b>C</b> -4K <b>W</b> -3K <b>B</b> -5K		
		<b>E39 RETRO-FIT LED 120-277V</b>			
		<b>LC5</b> -54W 7290lm, Type 5 + <b>LC3</b> -40W 5600lm, Type 3 + <b>LCD</b> -54W 5900lm, Dark Sky +	<b>C</b> -4K (standard)		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included





## High Street LED Commercial System

- Cast Aluminum
- 0-10V Dimming Options
- Dedicated LED Retro-Fit Available
- T3 Options (Type 5 standard)

**GUIDE CODE: C36TC-L40C-BK**


ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>C36T</b> <b>C37T</b>	ACRYLIC L-Opal C-Clear	<b>E26 MEDIUM BASE</b>		<b>BK</b> -Black <b>BZ</b> -Bronze <b>WH</b> -White	<b>MG</b> -E39 Mogul Socket  <b>T3</b> -Type 3 Distribution (Dedicated LED Only, T3 is Special Order, Type 5 Standard)
		(1) 200W MAX Medium Base			
		<b>120-277V DEDICATED LED</b>			
		<b>L40</b> -30W 4000lm <b>L60</b> -40W 6000lm <b>L80</b> -60W 9000lm	<b>C</b> -4K <b>W</b> -3K <b>B</b> -5K		
		<b>E39 RETRO-FIT LED 120-277V</b>			
		<b>LC5</b> -54W 7290lm, Type 5 + <b>LC3</b> -40W 5600lm, Type 3 + <b>LCD</b> -54W 5900lm, Dark Sky +	<b>C</b> -4K (Standard)		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included.





# COMMERCIAL LIGHTING

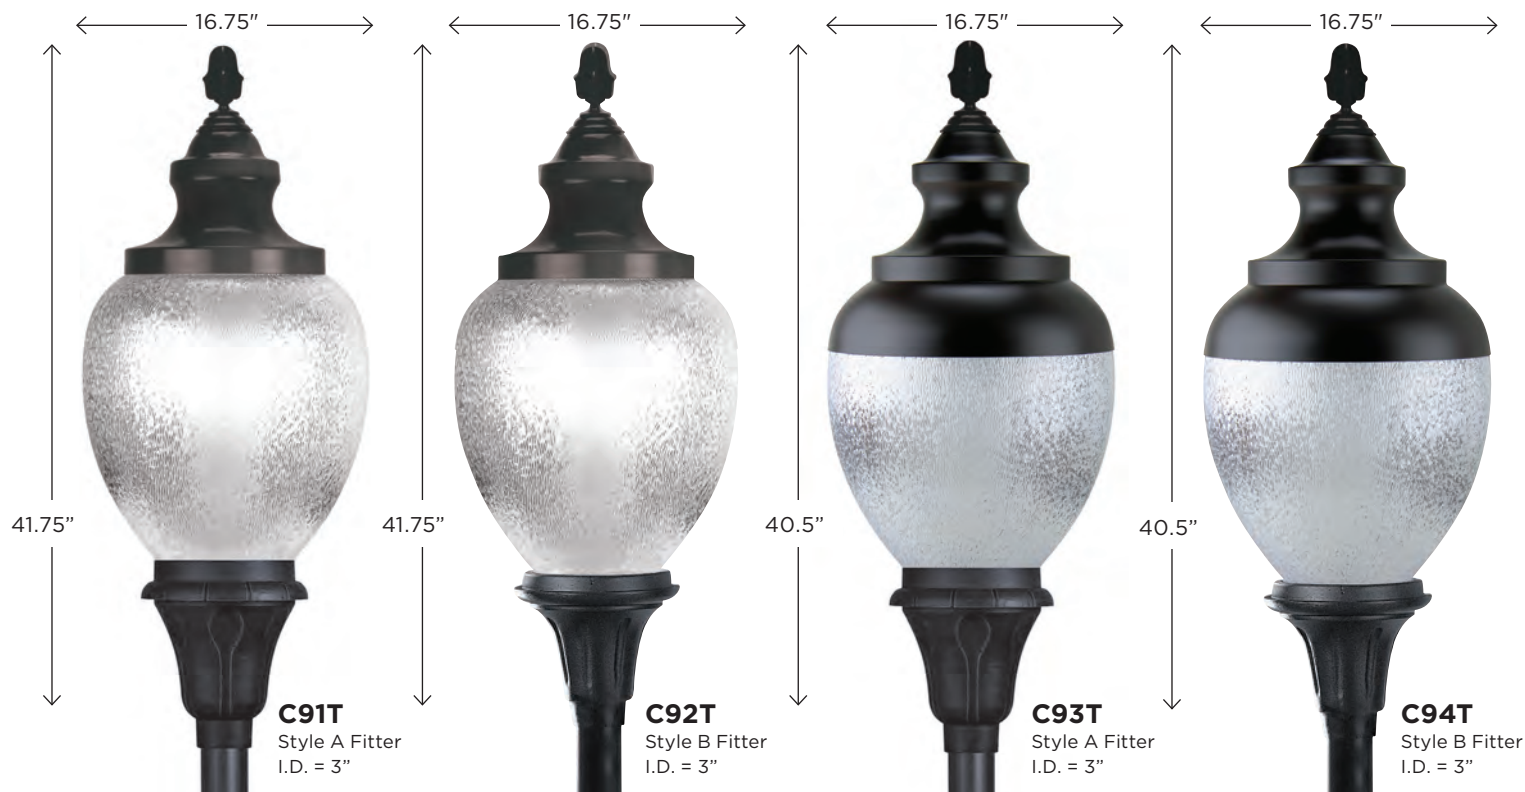

## Park Place LED Commercial System

- Aluminum Fitter & Canopy
- 0-10V Dimming Options
- Integrated LED & LED Retro-Fit Available
- Acorns have 8" neck
- Type 5 Standard
- Type 3 Retro-Fit LED
- 5 year warranty on LED components

### GUIDE CODE: C91TC-L40C-BK

ITEM #	ACORN	LIGHT SOURCE	CCT	COLOR	OPTIONS
C91T-Style A C92T-Style B C93T-Style A C94T-Style B	POLYCARBONATE C-Clear Textured	E26 MEDIUM BASE		BK-Black BZ-Bronze WH-White	MG-E39 Mogul Socket
		(1) 200W MAX Medium Base			
	ACRYLIC LA-Opal Textured CA-Clear Textured FA-Frost Textured	120-277V INTEGRATED LED			
		L40-40W 4000lm L60-54W 5700lm	C-4K W-3K		
		E39 RETRO-FIT LED 120-277V			
		LC5-54W 7290lm, Type 5 + LC3-40W 5600lm, Type 3 + LCD-54W 5900lm, Dark Sky +	C-4K		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included.





## Park Place LED Commercial System

- Cast Aluminum
- 0-10V Dimming Options
- Dedicated LED & LED Retro-Fit Available
- Acorns have 8" neck
- Type 5 Standard
- Type 3 Retro-Fit LED
- 5 year warranty on LED components




### GUIDE CODE: C84TC-L40C-BK

ITEM #	ACORN	LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>C83T</b> -Style B <b>C84T</b> -Style A <b>C85T</b> -Style A <b>C86T</b> -Style B	POLYCARBONATE <b>C</b> -Clear Textured	<b>E26 MEDIUM BASE</b>		<b>BK</b> -Black <b>BZ</b> -Bronze <b>WH</b> -White	<b>AFB</b> -Acorn Finial Socket <b>MG</b> -E39 Mogul Socket
		(1) 200W MAX Medium Base			
	<b>120-277V INTEGRATED LED</b>				
	<b>L40</b> -40W 4000lm <b>L60</b> -54W 5700lm	<b>C</b> -4K <b>W</b> -3K			
	<b>E39 RETRO-FIT LED 120-277V</b>				
	<b>LC5</b> -54W 7290lm, Type 5 + <b>LC3</b> -40W 5600lm, Type 3 + <b>LCD</b> -54W 5900lm, Dark Sky +	<b>C</b> -4K			
	ACRYLIC <b>LA</b> -Opal Textured <b>CA</b> -Clear Textured <b>FA</b> -Frost Textured				

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included.



COMMERCIAL LIGHTING

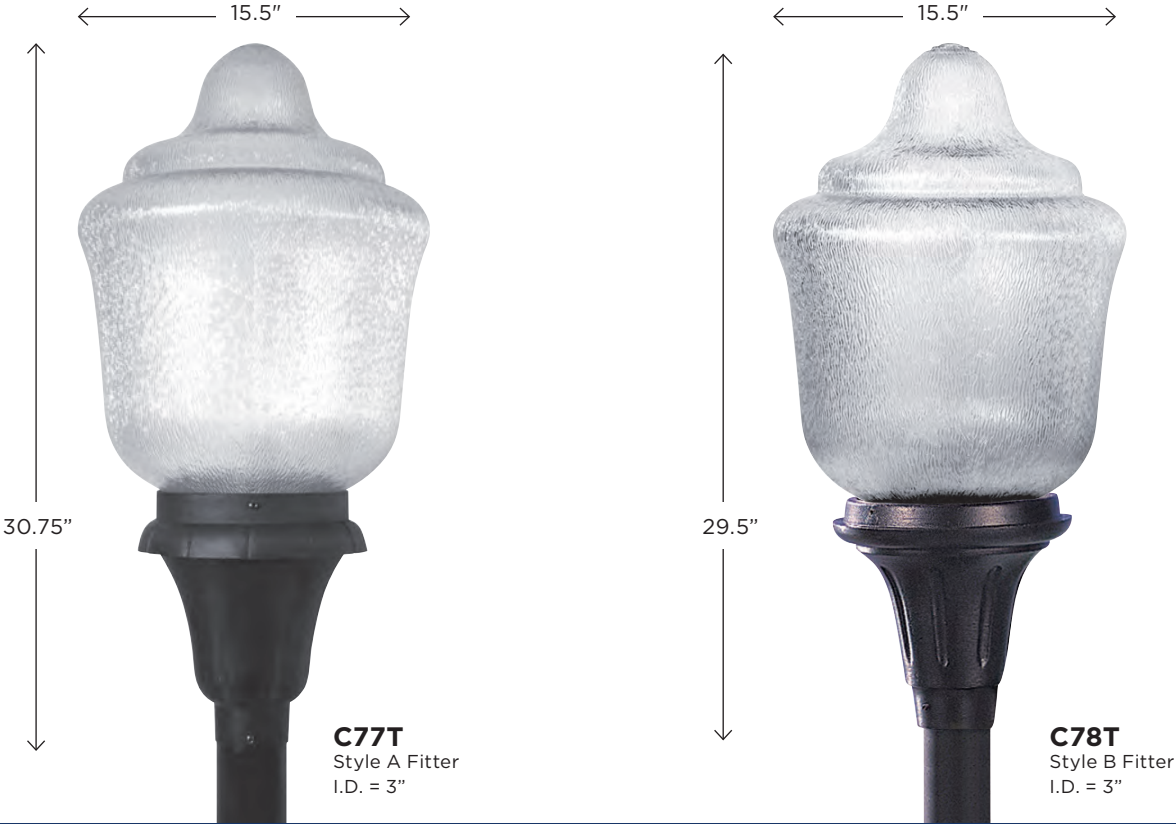

Park Place LED Commercial System

- Cast Aluminum Fitter
- 0-10V Dimming Options
- Integrated LED & LED Retro-Fit Available
- Acorns have 8” necks
- Type 5 Standard
- Type 3 Retro-Fit LED
- 5 year warranty on LED components

GUIDE CODE: C77TC-L40C-BK

ITEM #	ACORN	LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>C77T</b> -Style A <b>C78T</b> -Style B	POLYCARBONATE <b>C</b> -Clear Textured	<b>E26 MEDIUM BASE</b>		<b>BK</b> -Black <b>BZ</b> -Bronze <b>WH</b> -White	<b>AFB</b> -Acorn Finial Topper <b>MG</b> -E39 Mogul Socket
		(1) 200W MAX Medium Base			
	ACRYLIC <b>CA</b> -Clear Textured	<b>120-277V INTEGRATED LED</b>			
		<b>L40</b> -40W 4000lm <b>L60</b> -54W 5700lm	<b>C</b> -4K <b>W</b> -3K		
		<b>E39 RETRO-FIT LED 120-277V</b>			
		<b>LC5</b> -54W 7290lm, Type 5 + <b>LC3</b> -40W 5600lm, Type 3 + <b>LCD</b> -54W 5900lm, Dark Sky +	<b>C</b> -4K		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included. See page 85 for acorn replacements and measurements.







**C75T**  
Style A Fitter  
I.D. = 3"



**C76T**  
Style B Fitter  
I.D. = 3"

## Park Place LED Commercial System

- Cast Aluminum Fitter
- 0-10V Dimming Options
- Integrated LED & LED Retro-Fit Available
- Acorns have 8" necks
- Type 5 Standard
- Type 3 Retro-Fit LED
- 5 year warranty on

LED components

### GUIDE CODE: C75TC-L40C-BK

ITEM #	ACORN	LIGHT SOURCE	CCT	COLOR	OPTIONS
C75T-Style A C76T-Style B	POLYCARBONATE C-Clear Textured  ACRYLIC LA-Opal Textured CA-Clear Textured FA-Frost Textured	E26 MEDIUM BASE		BK-Black BZ-Bronze WH-White	MG-E39 Mogul Socket
		(1) 200W MAX Medium Base			
		120-277V INTEGRATED LED			
		L40-40W 4000lm L60-54W 5700lm	C-4K W-3K		
		E39 RETRO-FIT LED 120-277V			
		LC5-54W 7290lm, Type 5 + LC3-40W 5600lm, Type 3 + LCD-54W 5900lm, Dark Sky +	C-4K		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included. See page 85 for acorn replacements and measurements.





Park Place LED Commercial System

- Cast Aluminum Fitter
  - 0-10V Dimming Options
  - Integrated LED & LED Retro-Fit available
  - 24", 27", 30" & 36" Opal Globes available
- Globes have 8" Neck (*replacements page 85*)
  - Type 5 Standard
  - Type 3 Retro-Fit LED
  - 5 year warranty on LED components

GUIDE CODE: C2014TL-L40C-BK

ITEM #	GLOBE	LIGHT SOURCE	CCT	COLOR	OPTIONS
C2014T-Style A C2024T-Style B	POLYCARBONATE C-Clear L-Opal	E26 MEDIUM BASE		BK-Black BZ-Bronze WH-White	MG-E39 Mogul Socket
		(1) 200W MAX Medium Base			
C8014T-Style A C8024T-Style B	ACRYLIC C-Clear F-Frost L-Opal S-Smoke	120-277V INTEGRATED LED			
		L40-40W 4000lm L60-54W 5700lm	C-4K W-3K		
		E39 RETRO-FIT LED 120-277V			
		LC5-54W 7290lm, Type 5 + LC3-40W 5600lm, Type 3 + LCD-54W 5900lm, Dark Sky +	C-4K		

Some options cannot be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included.





## Park Place LED Commercial System

- Cast Aluminum Fitter
- 0-10V Dimming Options
- Integrated LED & LED Retro-Fit available
- 24", 27", 30" & 36" Opal Globes available
- Globes have 8" Neck (*replacements page 85*)
- Type 5 Standard
- Type 3 Retro-Fit LED
- 5 year warranty on LED components

### GUIDE CODE: C2015TL-L40C-BK

ITEM #	GLOBE	LIGHT SOURCE	CCT	COLOR	OPTIONS
C2015T-Style A C2025T-Style B	POLYCARBONATE C-Clear L-Opal	E26 MEDIUM BASE (1) 200W MAX Medium Base		BK-Black BZ-Bronze WH-White	MG-E39 Mogul Socket
C8015T-Style A C8025T-Style B	ACRYLIC C-Clear F-Frost L-Opal S-Smoke	120-277V INTEGRATED LED L40-40W 4000lm L60-54W 5700lm	C-4K W-3K		
		E39 RETRO-FIT LED 120-277V LC5-54W 7290lm, Type 5 + LC3-40W 5600lm, Type 3 + LCD-54W 5900lm, Dark Sky +	C-4K		

Some options cannot be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5. All posts and post options sold separately. + Lamp included.







Walkway Bollards

- Aluminum Housing
- Mounting Hardware Included
- 0-10V Dimming

GUIDE CODE: C200BC-L10C-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR
C200B	POLYCARBONATE C-Clear	120-277V MULTI-VOLT	C-4K	BK-Black BZ-Bronze
		L10-10W, 937lm		

GUIDE CODE: C201BC-L20C-BK


ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR
C201B	POLYCARBONATE C-Clear	120-277V MULTI-VOLT	C-4K	BK-Black BZ-Bronze
		L20-20W, 1400lm	W-3K	

Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.





**TUNABLE**  
Color Temperature  
& Lumen Output



SWITCH  
PANEL  
ON  
REVERSE  
SIDE



## Walkway Bollards

- Tunable CCT & Switchable Lumen / Wattage
- 0-10V Dimming
- Aluminum Housing
- Mounting Hardware Included

**GUIDE CODE: C202BC-L22S-BK**


ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR
<b>C202B</b> <b>C203B</b>	POLYCARBONATE <b>C</b> -Clear	<b>120-277V MULTI-VOLT</b>  <b>L22</b> -Switchable 12W, 1600lm; 16W, 2100lm or 22W, 3000lm	<b>S</b> -Switchable 3K, 4K & 5K	<b>BK</b> -Black <b>BZ</b> -Bronze

Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.



# COMMERCIAL LIGHTING

## Cylinder Aluminum Housing



**S64FM**  
Ceiling Mount



**S64W**  
Downlight  
EXTENDS: 7 3/4"  
H/CTR: 2 3/8"  
BACKPLATE:  
4 5/8" X 4 5/8"



**S65W**  
Up & Downlight  
EXTENDS: 7.75"  
H/CTR: 6.875"  
BACKPLATE:  
4.625" X 4.625"

GUIDE: S65W-LR12W-BK

ITEM #	LED LIGHT SOURCE	CCT	COLOR
<b>S64W</b> <b>S64FM</b>	<b>120V LIGHTWAVE LED</b>	<b>C-4K</b>	<b>BK-Black</b> <b>BZ-Bronze</b>
	<b>LR12-13W 1000lm 80CRI</b>		
<b>S65W</b>	<b>LR12-2x13W 2000lm 80CRI</b>		

See page 31 for composite version.



## Citadel Enclosed & Gasketed

- Occupancy sensor available
- Emergency backup available
- (see cut sheet for more information)
- Die cast aluminum
- IP65 rated




SCAN  
FOR  
VIDEO

← 11.80" Diam →



**166FM**  
Ring

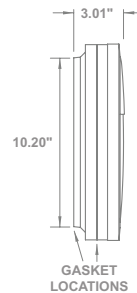

← 11.80" Diam →  
H/CTR: 5 7/8"



**169FM**  
Eyelid

GUIDE: 166FMF-LR15C-BK

ITEM #	DIFFUSER	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
<b>166FM</b> <b>169FM</b>	<b>POLYCARBONATE</b> <b>F-Frosted</b>	<b>120V LIGHTWAVE LED</b>	<b>C-4K</b> <b>W-3K</b>	<b>BK-Black</b> <b>WH-White</b>	<b>EB-Emergency Backup</b> <b>O-Occupancy Sensor</b> (options cannot be combined)  options are not available with LR32 & LT32 light source
		<b>LR15-15W 1400lm 80CRI ★</b>			
		<b>LR22-23W 1900lm 80CRI ★</b>			
		<b>LR32-32W 2700lm 80CRI</b>			
		<b>LT15-16W 1400lm 90CRI</b>			
		<b>LT22-24W 2020lm 90CRI</b>	<b>4K</b>		
		<b>LT32-32W 2700lm 90CRI</b>			
		<b>120-277V MULTI-VOLT</b>			
		<b>L22-22W 1824lm</b>			

★ Lamp included. ★ Energy Star qualified product. Options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.

