

164FM-BK
H/CTR: 5"
BACKPLATE:
8.375" sq




165FM-WH
H/CTR: 4.5"
BACKPLATE: 8.5" rd



Address Light

- 120V Integrated LED
- Customizable
- Includes Peel-N-Stick House Numbers (3 of each number)
- Increase Address Visibility

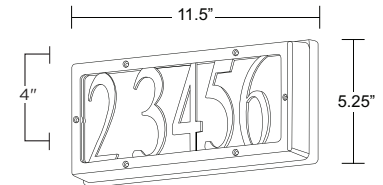

100FM
EXTENDS: 2"
H/CTR: 2"



Guardian

- Wall Or Ceiling Mount
- Vandal & Insect Resistant
- Knockouts For Conduit
- Polycarbonate Base & Diffuser
- 90 CRI Options Available
- Multi-Volt Options Available
- Photocell Options Available
- Occupancy Sensor Available
- Emergency Backup Available (see cut sheet for more information)

GUIDE CODE: 164FM-BK

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
164FM 165FM	POLYCARBONATE Opal F-Frosted Prismatic	E26 MEDIUM BASE LED	C-4K W-3K	BK-Black WH-White	PC-Photocell O-Occupancy Sensor EB-Emergency Backup (EB for 120V Lightwave & 120-277 Multi-Volt LED only) (options cannot be combined)
		2LE26- (2) 9.5W 800lm (E26 LED Lamp) †			
		120V LIGHTWAVE LED			
		LR12-13W 1000lm 80CR ★	4K		
		LR15-15W 1400lm 80CRI ★			
		LR22-23W 1900lm 80CRI ★			
		LT12-12W 1000lm 90CRI			
LT15-16W 1400lm 90CRI	C-4K				
LT22-24W 1900lm 90CRI					
100FM	ACRYLIC White	120V INTEGRATED LED	C-4K	BK-Black	
		L5-300lm			

† Lamp included. ★ Energy Star qualified product. * Energy Star only available with 164 and 165. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.

