


OUTDOOR POST FIXTURE - S75TC-1

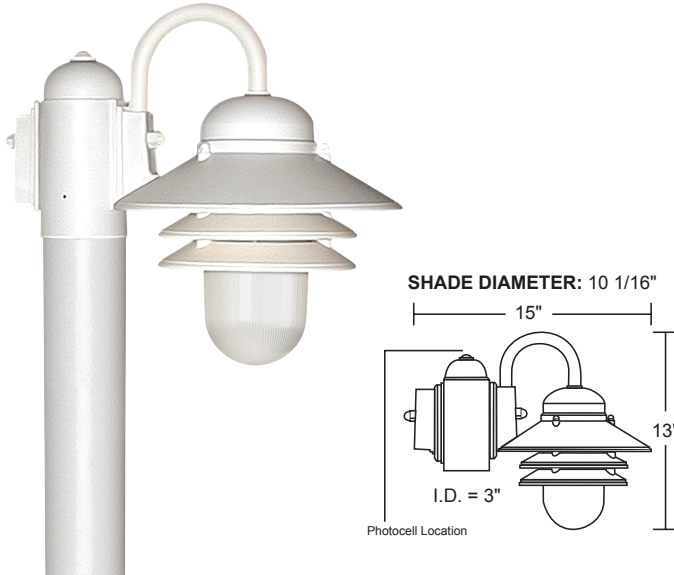

Wave Lighting's S75TC-1 adds a welcoming look to any outdoor space. This fixture is available in incandescent and LED and is easily relamped by unscrewing diffuser. Wave Lighting's S75TC-1 fits on a 3" diameter pole (not included) only mounting hardware is included. Options include photocell.

LED SOURCE OPTIONS

LED LIGHTWAVE

- 120V, 50/60 Hz
- AC Driver-On-Board Array
- Estimated 50,000 Hrs L₇₀
- Surge Supression
- Dimmable
- 3000K or 4000K CCT, 80 CRI
- 5 Year Warranty
- UL Listed

LED MULTI-VOLT SYSTEM

- 120-277V, 50/60Hz
- Estimated 50,000 Hrs L₇₀
- 3000K* or 4000K CCT, 80 CRI
- 3 Year Warranty
- UL Listed

E26 REPLACEABLE LED

- 120V, 50/60Hz
- "Screw-In" Medium Base A19/E26 LED Lamp
- Estimated 15,000 Hrs L₇₀
- Dimmable
- 3000K CCT 90CRI or 4000K** CCT 80CRI
- 3 Year Warranty
- UL Listed & T24 Compliant (3K only)



SPECIFICATIONS

- Black or White Finish
- Mounting Hardware Included
- Clear Prismatic Acrylic Diffuser
- Post Mount Only
- Minimum Starting Temp -20°F
- UL Listed for Wet Locations

CALL FOR PHOTOMETRIC INFORMATION

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION
S75TC-1	ACRYLIC Clear Pismatic	INCANDESCENT (1) 60W MAX Medium Base	BK-Black WH-White	PC-Photocell
		LED LIGHT SOURCE		
		120V LIGHTWAVE LED LR12-13W 1000lm E26 MEDIUM BASE LED LE26- 10W 800lm ☆	CCT C-4K W-3K	
120-277V MUTI-VOLT LED L11-11W 912lm	CCT 4K			

* Special order item. Longer lead times may apply. ** Not T24 Compliant. ☆ Lamp Included

REFER TO CATALOG FOR OPTION SPECIFICATIONS - Specifications subject to change without notice - FIXTURE SPEC 11/17