
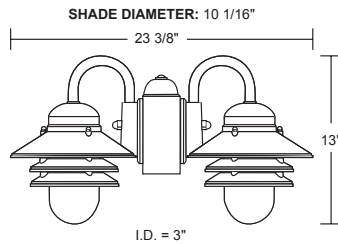


# OUTDOOR POST FIXTURE - S75TL-2

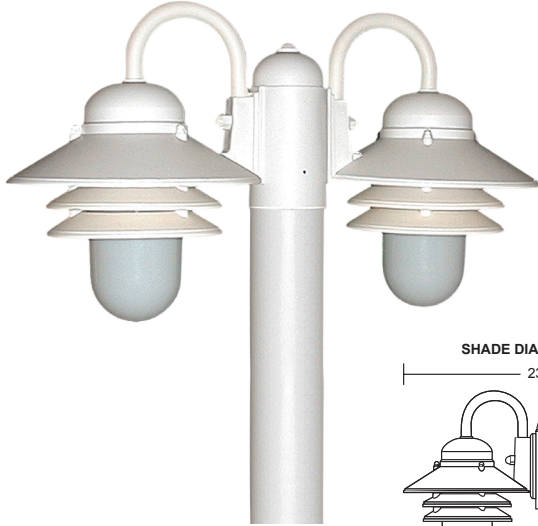

Wave Lighting's S75TL-2 adds a welcoming look to any outdoor space. This fixture is available in incandescent and LED and is easily relamped by unscrewing diffuser. Wave Lighting's S75TL-2 fits on a 3" diameter pole (not included) only mounting hardware is included. Options include photocell.

## LED SOURCE OPTIONS

### LED LIGHTWAVE

- 120V, 50/60 Hz
- AC Driver-On-Board Array
- Estimated 50,000 Hrs L<sub>70</sub>
- Surge Supression
- Dimmable
- 3000K or 4000K CCT, 80 CRI
- 5 Year Warranty
- UL Listed

### LED MULTI-VOLT SYSTEM

- 120-277V, 50/60Hz
- Estimated 50,000 Hrs L<sub>70</sub>
- 3000K\* or 4000K CCT, 80 CRI
- 3 Year Warranty
- UL Listed

### E26 REPLACEABLE LED

- 120V, 50/60Hz
- "Screw-In" Medium Base A19/E26 LED Lamp
- Estimated 15,000 Hrs L<sub>70</sub>
- Dimmable
- 3000K CCT 90CRI or 4000K\*\* CCT 80CRI
- 3 Year Warranty
- UL Listed & T24 Compliant (3K only)

## SPECIFICATIONS

- Black or White
- Mounting Hardware Included
- Opal Acrylic Diffuser
- Wall Mount Only
- Minimum Starting Temp -20°F
- UL Listed for Wet Locations

## CALL FOR PHOTOMETRIC INFORMATION

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION	
S75TL-2	ACRYLIC Opal	INCANDESCENT (2) 60W MAX Medium Base	BK-Black WH-White	PC-Photocell	
		LED LIGHT SOURCE			
		120V LIGHTWAVE LED LR12- (2)13W 1000lm E26 MEDIUM BASE LED LE26- (2)10W 800lm ☆			CCT C-4K W-3K
		120-277V MUTI-VOLT LED L22-22W 1824lm			CCT 4K

\* Special order item. Longer lead times may apply. \*\* Not T24 Compliant. ☆ Lamp Included

REFER TO CATALOG FOR OPTION SPECIFICATIONS - Specifications subject to change without notice - FIXTURE SPEC 11/17