


INSTALLATION INSTRUCTIONS

READ IMPORTANT SAFETY TIPS BEFORE PROCEEDING WITH INSTALLATION


SAFETY TIPS



Turn fixture off! (Place wall switch in off position, if fixture has built-in switch or chain pull, switch or pull chain so fixture is off.)




Next - go to the main fuse box. If your fuse box has an ON/OFF switch, simply place main power switch in OFF position.




Screw-in type fuses - unscrew the fuse or fuses that control the power to the fixture or room you are working in.

1

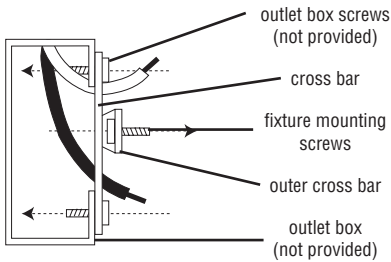


THREAD fixture mounting screws (provided) into outer cross bar. ATTACH cross bar to outlet box with outlet box screws (not provided).

2

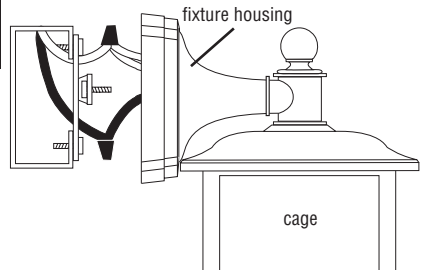


CONNECT THE WIRES. NOTE: Attach black fixture wire to black supply wire, white fixture wires to white supply wire. Do not mix them up. Use wire connectors (not provided).

3

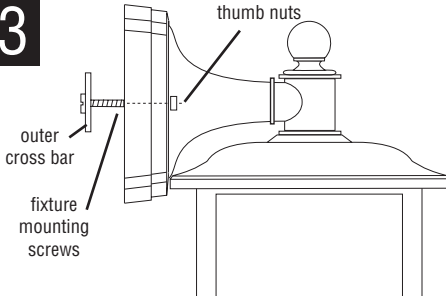


POSITION THE FIXTURE HOUSING over the fixture mounting screws and secure in place with the thumb nuts provided.

4

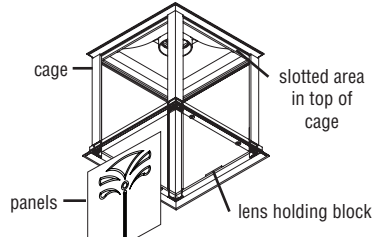

INSTALL PLASTIC PANELS, by sliding panel up into cage in slots on inside of cage. Make sure panel is all the way up into slotted area in top of cage. Tilt bottom of panel towards cage legs at bottom opening of cage. Slide panel bottom into slot in foot of cage between lens holding block and cage legs.

5

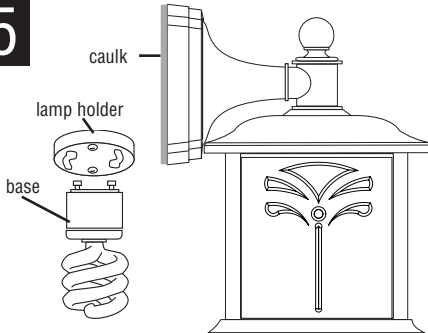

ALIGN AND INSERT the round ended pins on the bottom of the self ballasted lamp into the circular opening in the lamp holder key hole slots. Grasp base and rotate clockwise. Only use self ballasted compact lamp specified on fixture.

NOTE: Fixture **MUST** be caulked with an acrylic caulk where fixture housing meets mounting surface. This provides a water tight seal when fixture is installed.



Clean only with mild soap and water. Avoid spraying with Cleansers, Insecticides, and Pesticides that a petroleum based hydrocarbon products. These will degrade Luminaire.

IFR101GU Rev. B