

OUTDOOR CEILING FIXTURE - 157FM



NON-CORROSIVE

Wave Lighting's 156FM adds a contemporary look to any outdoor space. This fixture is available in incandescent and LED and is easily relamped by removing screws (included) from base. Wave Lighting's 156FM is designed for ceiling applications and mounting hardware is included. Options include photocell.

LED SOURCE OPTIONS

LED LIGHTWAVE


- 120V, 50/60 Hz
- AC Driver-On-Board Array
- Estimated 50,000 Hrs L₇₀
- Surge Supression
- Dimmable
- 3000K or 4000K CCT, 80 CRI
- 5 Year Warranty
- UL Listed & Energy Star Certified

LED MULTI-VOLT SYSTEM

- 120-277V, 50/60Hz
- Estimated 50,000 Hrs L₇₀
- 4000K CCT 80 CRI
- 3 Year Warranty
- UL Listed

E26 REPLACEABLE LED

- 120V, 50/60Hz
- "Screw-In" Medium Base A19/E26 LED Lamp
- Estimated 15,000 Hrs L₇₀
- Dimmable
- 3000K CCT 90CRI or 4000K** CCT, 80CRI
- 3 Year Warranty
- UL Listed, Energy Star Certified & T24 Compliant (3K only)

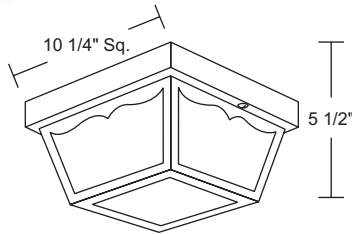

SPECIFICATIONS

- Black or White
- Mounting Hardware Included
- Frosted Polypropylene Diffuser
- Ceiling Mount Only
- Minimum Starting Temp -20°F
- UL Listed for Damp Locations

CALL FOR PHOTOMETRIC INFORMATION

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION		
157FM	POLYPROPYLENE Frosted	POLYCARBONATE BACK PAN - MEDIUM BASE SOCKET				
		INCANDESCENT (2) 60W MAX Medium Base		BK-Black WH-White		
		LED LIGHT SOURCE				
		E26 MEDIUM BASE LED LE26- (2) 10W 800lm ☆	CCT C-4K W-27K			
		ALUMINUM BACK PAN - DEDICATED LED			BK-Black WH-White	PC-Photocell
		LED LIGHT SOURCE				
120V LIGHTWAVE LED LR12-13W 1000lm LR15-15W 1400lm LR22-23W 1900lm	CCT C-4K W-3K					
120-277V MULTI-VOLT LED L22-22W 1824lm	CCT 4K					

* Special order item. Longer lead times may apply. ** Not T24 Compliant. ☆ Lamp Included Energy Star Qualified Product

REFER TO CATALOG FOR OPTION SPECIFICATIONS - Specifications subject to change without notice - FIXTURE SPEC 11/17