


PROJECT		
TYPE		

OUTDOOR CEILING FIXTURE 157FM

OUTDOOR DECORATIVE MARLEX®

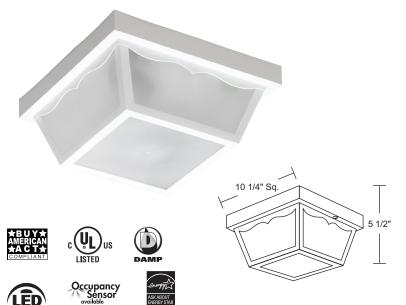

Wave Lighting's 157FM adds a contemporary look to any outdoor space. Wave Lighting's 156FM is designed for ceiling applications and mounting hardware is included. Occupancy Sensor option available.

LED SOURCE OPTIONS

LIGHTWAVE LED - LR/LT

• 120V, 50/60 Hz

VOLTAGE

- AC Driver-On-Board Array
- Estimated 50,000 Hrs L_{70}
- Low Flicker (LT models)
- Surge Supression
- Dimmable (see compatible dimmer list)
- High Efficacy LED Light Source
- 3000K or 4000K CCT 80 or 90CRI
- 5 Year Warranty
- Energy Star

LED MULTI-VOLT SYSTEM - L22

- 120-277V, 50/60Hz
- \bullet Estimated 50,000 Hrs L₇₀
- 4000K CCT 80CRI
- 3 Year Warranty

E26 MEDIUM BASE - LE26

- 120V, 50/60Hz
- "Screw-In" Medium Base A19/E26 LED Lamp
- Estimated 15,000 Hrs L₇₀
- Low Flicker (3K models)
- Dimmable (see compatible dimmer list)
- 3000K CCT 90CRI or 4000K CCT 80CRI
- 3 Year Warranty
- Energy Star

GUIDE CODE: 157FM-BK

SPECIFICATIONS

Mounting Hardware Included

• Frosted Polypropylene Diffuser

• Minimum Starting Temp -20°F

• UL Listed for Damp Locations

Composite Construction

WH WHITE

• Black or White

• Non-Corrosive

BK BLACK

Ceiling Mount Only

CALL FOR PHOTOMETRIC INFORMATION

ITEM#	DIFFUSER	LIGHT SOURCE	ССТ	COLOR	OPTIONS
157FM POLYPROPYLENE Frosted	POLYPROPYLENE	E26 MEDIUM BASE	C -4K W -3K	BK -Black WH -White	O-Occupancy Sensor (120V Lightwave LED only)
	Frosted	POLYCARBONATE BACK PAN (2) 60W MAX Medium Base LE26-9.5W 800lm (E26 LED Lamp) + *			
	120V LIGHTWAVE LED				
		ALUMINUM BACK PAN LR12-13W 1000lm 80CRI * LR15-15W 1400lm 80CRI * LR22-23W 1900lm 80CRI * LT12-12W 1040lm 90CRI LT15-16W 1400lm 90CRI LT22-24W 2020lm 90CRI			
		120-277V MULTI-VOLT LED			
		L22 -22W 1824lm	4K		

⁺ Lamp included. ★Energy Star qualified product.