


OUTDOOR WALL FIXTURE 105/106



Wave Lighting's 105/106 adds a welcoming look to any outdoor space. This fixture can be used to comply with 2016 Title 24 Part 6 High Efficacy LED Light Source Requirements. Wave Lighting's 105/106 is designed for wall applications and mounting hardware is included. Options include photocell.

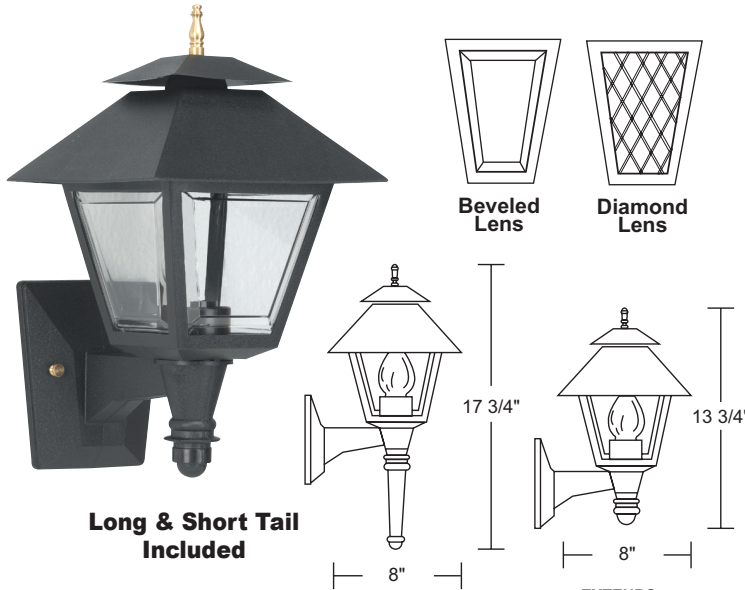

Long & Short Tail Included



EXTENDS:
9 3/4"
H/CTR:
11 1/2"
BACKPLATE:
5 1/2" x 5"

LED SOURCE OPTIONS

LIGHTWAVE LED - LR/LT

- 120V, 50/60 Hz
- AC Driver-On-Board Array
- Estimated 50,000 Hrs L₇₀
- Low Flicker (LT models)
- Surge Supression
- Dimmable (see compatible dimmer list)
- High Efficacy LED Light Source
- 3000K or 4000K CCT; 80 or 90CRI
- 5 Year Warranty
- Energy Star

E26 REPLACEABLE LED - LE26

- 120V, 50/60Hz
- "Screw-In" Medium Base A19/E26 LED Lamp
- Estimated 15,000 Hrs L₇₀
- Low Flicker (3K models)
- Dimmable (see compatible dimmer list)
- 3000K CCT 90CRI or 4000K CCT 80CRI
- 3 Year Warranty
- Energy Star

SPECIFICATIONS

- Black or White
- Mounting Hardware Included
- Clear, Amber or Frosted Acrylic Diffuser
- Wall Mount Only
- Minimum Starting Temp -20°F
- UL Listed for Wet Locations

GUIDE: 106C-LR12W

CALL FOR PHOTOMETRIC INFORMATION

ITEM #	LENS	LIGHT SOURCE	OPTION	
105-White 106-Black	ACRYLIC Clear Beveled A-Amber Beveled Diamond C-Clear Beveled Diamond F-Frosted Beveled	INCANDESCENT (1) 60W MAX Medium Base	PC-Photocell	
		LED LIGHT SOURCE		
		LIGHTWAVE LED LR12-13W 1000lm 80CRI LT12-12W 1040lm 90CRI		CCT C-4K W-3K
		E26 REPLACEABLE LED LE26-10W 800lm ☆		C-4K W-3K

☆ Lamp Included Energy Star Qualified Product

REFER TO CATALOG FOR OPTION SPECIFICATIONS - Specifications subject to change without notice - FIXTURE SPEC 1/19