



PROJECT \_\_\_\_\_


TYPE \_\_\_\_\_

VOLTAGE \_\_\_\_\_

# ROUND ALUMINUM POST


Lamp Posts & Accessories

Part # **3690/3690F** - 10 Foot Long 3 Inch Diameter Surface Mount

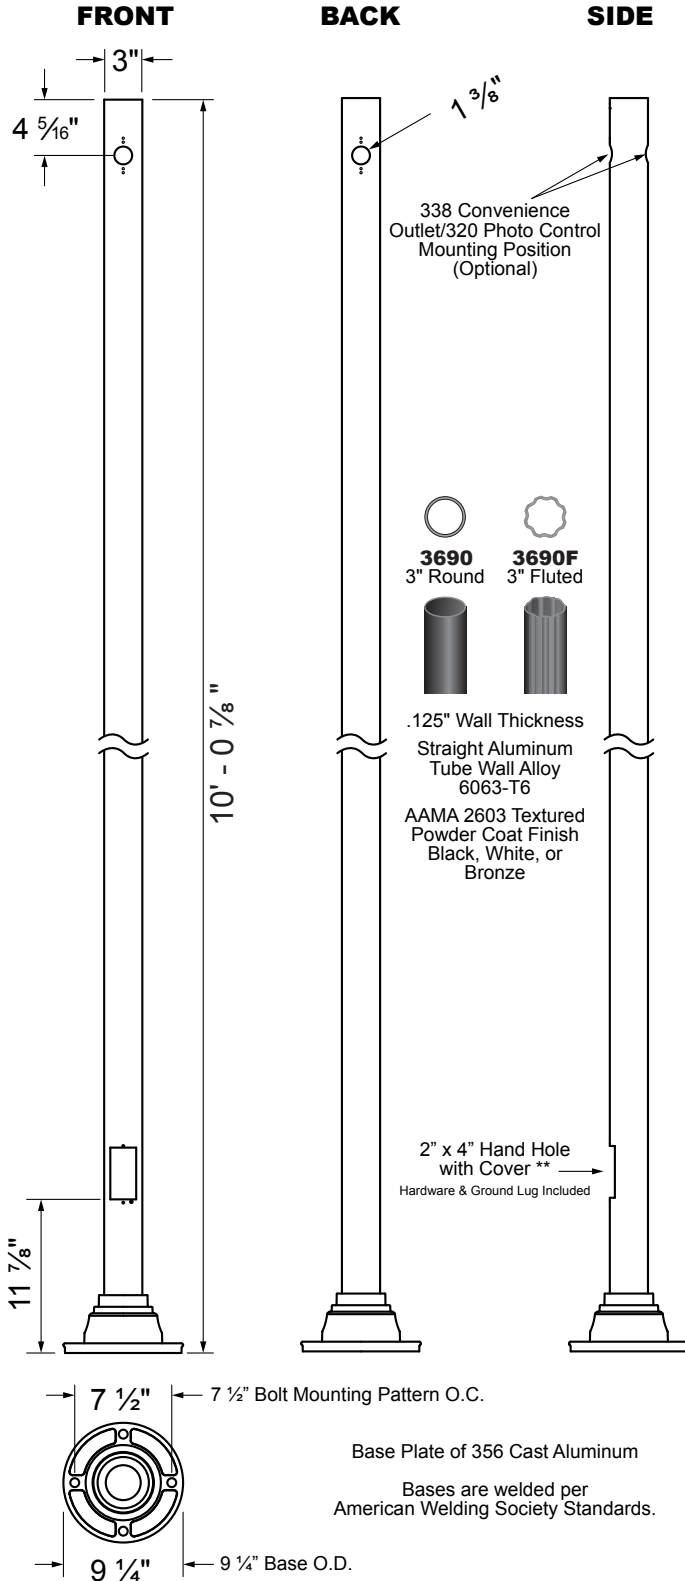

Dimensions	
Mounting Height:	10 ft
Wall Thickness:	.125 in
Butt Diameter:	3 in
Top Outer Diameter:	3 in
Base Diameter:	9 1/4 in
Bolt Circle:	7 1/2 in
Bolt Projection:	3 in
Bolt Size:	1/2 x 12 in
Net Weight:	19 lbs
Luminary Weight:	100 lbs

Maximum EPA (ft <sup>2</sup> ) WIND MAP ON BACK	
110 MPH:	3.25
115 MPH:	3.00
120 MPH:	2.50
130 MPH:	2.00
140 MPH:	1.50
150 MPH:	1.25
160 MPH:	0.75
170 MPH:	0.50
180 MPH:	0.50




**Anchor Bolts**  
BOLTS & TEMPLATE INCLUDED  
(4 ea.) 1/2" x 12" Galvanized Steel Anchor Bolts  
AASHTO M314-90 Grade 55  
Threaded End Galvanized Per ASTM A153 With (4 ea.) Galvanized Steel Leveling Hex Nuts, (4 ea.) Fasting Hex Nuts, and (8 ea.) Washers  
INSTALL IN REINFORCED CONCRETE (BY OTHERS)

**SEE SAFETY NOTES ON BACK**  
**ORDERING EXAMPLE: 3690-BK-HH**

ITEM #	BASE COVER***	COLOR	OPTION
3690	No Cover	<b>BK</b> -Black	<b>C*</b> -Conv. Outlet
3690F	<b>AB</b> -Americana <b>DB</b> -Decor <b>HX</b> -Hexagon <b>RB</b> -Round Cover <b>VB</b> -Victorian	<b>BZ</b> -Bronze <b>WH</b> -White	<b>320*</b> -Ezee Change Photo Control <b>HH**</b>

\* Option Not Available on 3690F  
\*\* To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" Hand Hole and ground lug.  
\*\*\* See catalog for base cover options.

PREPARED PER PERMISSION ANSI/ACSE 7-10

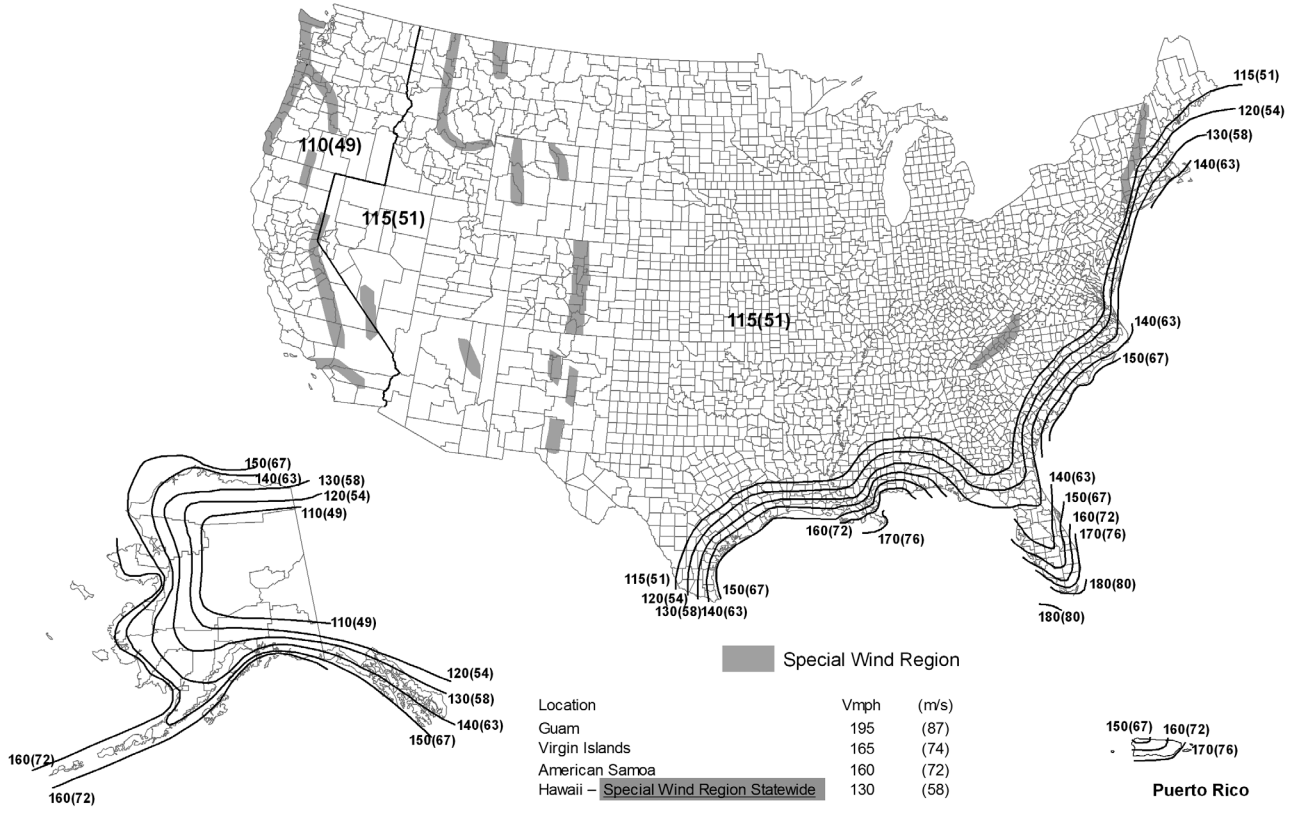

Notes:

1. Values are nominal design 3-second gust wind speeds in miles per hour (m/s) at 33 ft (10m) above ground for Exposure C category.
2. Linear interpolation between contours is permitted.
3. Islands and coastal areas outside the last contour shall use the last wind speed contour of the coastal area.
4. Mountainous terrain, gorges, ocean promontories, and special wind regions shall be examined for unusual wind conditions.
5. Wind speeds correspond to approximately a 7% probability of exceedance in 50 years (Annual Exceedance Probability = 0.00143, MRI = 700 Years).

The material presented is for general data purposes only and intended solely as informational guidance. Wave Lighting assumes no responsibility for errors or omissions in the material provided above. In no event shall Wave Lighting be liable for any special, direct, consequential, or incidental damages or any damages whatsoever, whether in action or contract, negligence or other tort, arising out of or in connection with the use of this data provided. Always consult local professionals to determine maximum wind velocities, gusting, and unique weather conditions for each specific application.

- Fixture and pole EPA values are based on wind pressures and forces specified in ANSI/ASCE 7-10.
- Wind speeds and listed EPAs are for ground mounting installations.
- Values are the highest-mile speeds at 33ft. (10 m) above ground for exposure Category 2.
- Local code may require wind speeds other than those shown on map.
- Harsh weather conditions such as hurricanes, typhoons, cyclones, or tornadoes may expose poles to flying debris and other disastrous effects not included in velocity ratings.

**SAFETY NOTES**

All surface mount posts are supplied with welded mounting bases.

Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.