


INSTALLATION INSTRUCTIONS

READ IMPORTANT SAFETY TIPS BEFORE PROCEEDING WITH INSTALLATION


SAFETY TIPS



Turn fixture off! (Place wall switch in off position, if fixture has built-in switch or chain pull, switch or pull chain so fixture is off.)




Next - go to the main fuse box. If your fuse box has an ON/OFF switch, simply place main power switch in OFF position.



Screw-in type fuses - unscrew the fuse or fuses that control the power to the fixture or room you are working in.


1

Omit this step if the unit you purchased does not include photo sensor switch.

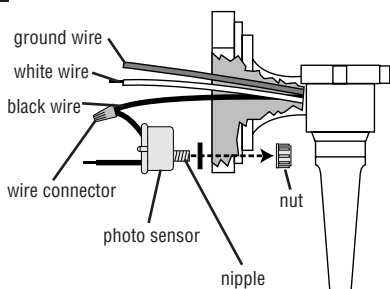


Insert nipple through hole in fixture base. Thread nut onto nipple. Connect black wire from fixture to one of the black wires from photo sensor with wire connector provided.

2

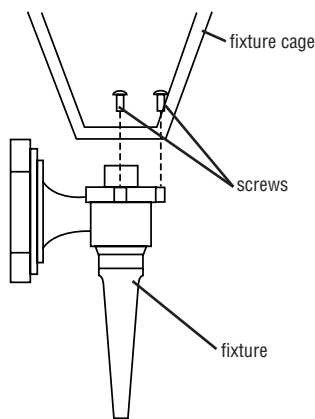


FASTEN THE CAGE to the fixture with the 3 screws provided.

3

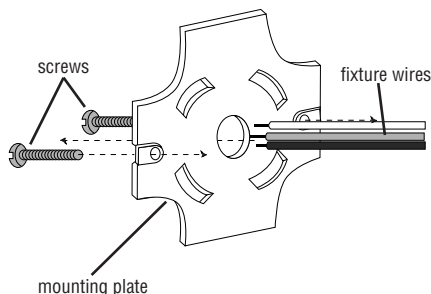

Thread the one inch long screws into the mounting plate and feed the fixture wires through the hole in the center of the mounting plate.

4

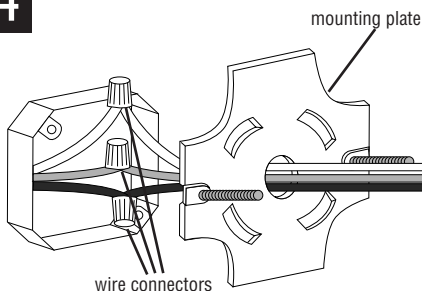


CONNECT THE WIRES. NOTE: Attach black fixture wire to black supply wire, white fixture wire to white supply wire. Do not mix them up. Use approved wire connectors (not provided). Connect bare fixture ground wire to ground wire to ground wire from outlet box. NEVER CONNECT GROUND WIRE TO BLACK OR WHITE POWER SUPPLY WIRES.

INSTALLATION INSTRUCTIONS


(CONTINUED FROM OTHER SIDE)

5

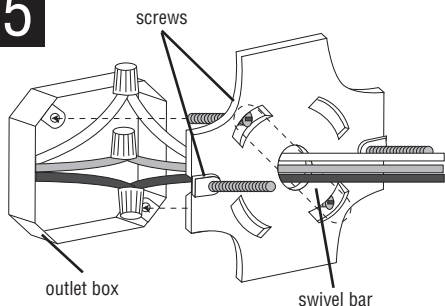


Attach swivel bar to outlet box with two 8-32 screws (not provided). These screws should be inserted through appropriate rectangular opening in plate and into swivel bar. Tighten screws.

6

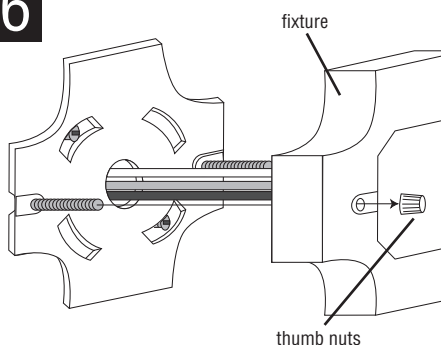


Position fixture over fixture mounting screws and secure with provided thumb nuts.

7




ATTACH FIXTURE ROOF TO FIXTURE HOUSING. Squeeze cage as shown. Position holes on side of cage over corresponding pins on underside of roof. Release cage - pins will snap into position.

8

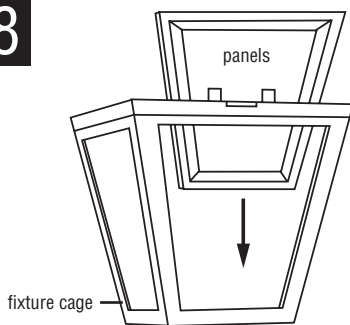


BEFORE SNAPPING HOUSING SHUT, install plastic panels, textured or beveled side out, by sliding panels down cage in slots on inside of cage. Make sure panels are all the way down into seats in cage

9



SCREW LIGHT BULB INTO SOCKET. Be sure to use bulb with wattage no greater than specified for this fixture. Lower roof and snap into place.

10

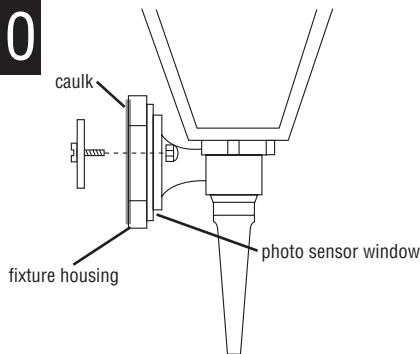

NOTE: Fixture MUST be caulked with an acrylic caulk where fixture housing meets mounting surface. This provides a water tight seal when fixture is installed.



CLEAN ONLY WITH MILD SOAP AND WATER. AVOID SPRAYING WITH CLEANSERS, INSECTICIDES, AND PESTICIDES THAT ARE PETROLEUM BASED HYDROCARBON PRODUCTS. THESE WILL DEGRADE LUMINAIRE.

IS003BP Rev B