




PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

VOLTAGE \_\_\_\_\_

# POST TOP FIXTURE C2015T/C8015T

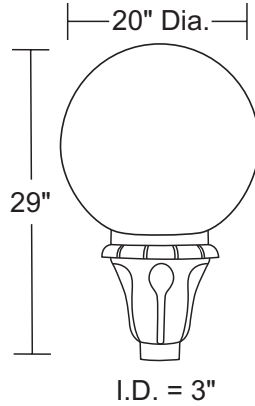

**EPA 1.1ft<sup>2</sup>  
WT 16 lbs**

IES FILES AVAILABLE ONLINE  
AT WAVELIGHTING.COM



Wave Lighting's commercial product line provides safety and security for all types of applications including parks, pedestrian walkways, and parking areas. Our Post top fixtures fit on any standard 3" diameter commercial pole (sold separately) with 3 set screws and allen wrench (provided). Standard 8" fitter neck diffuser is easily removed by loosening 3 set screws (provided).

## LIGHT SOURCE OPTIONS

### DEDICATED LED SYSTEM - L

- 120-277V, 50/60Hz
- 150W or 250W Metal Halide Equivalent
- Estimated 100,000 Hrs L<sub>80</sub>
- Surge Supression
- 3000K\*, 4000K, or 5000K\* CCT, 80CRI
- Type 3\* or Type 5 Distribution
- 0 - 10V Dimming
- 5 Year Warranty
- DLC Listed

### REPLACEABLE LED CORN COB - LC

- 100-277V, 50/60Hz
- 250W Metal Halide Equivalent Lamp Included
- E39 Mogul Base Socket
- Estimated 50,000 Hrs L<sub>70</sub>
- Surge Supression
- Available in 4000K CCT 80CRI
- Type 3, Type 5, or Dark Sky Distribution
- 5 Year Warranty
- DLC Listed

### HID SYSTEM - MH/H

- Multi-Tap Magnetic Ballast, 120-277V Option
- Metal Halide or High Pressure Sodium
- Up To 150W Lamp Included
- 4kV Medium Base Socket, Mogul On Request
- Type 3, Type 5, or Dark Sky Friendly Distribution
- 1 Year Warranty

## SPECIFICATIONS

- Cast Aluminum Housing
- Stainless Steel Set Screws
- Black, White, or Bronze Finish
- Polycarbonate or Acrylic Globe Diffuser
- Clear, Opal, Smoke or Clear Prism Diffuser Options
- UL Listed For Wet Locations

## GUIDE: C2015TC-L40C-BK

## CALL FOR PHOTOMETRIC INFORMATION

ITEM #	ACORN	LIGHT SOURCE	COLOR	HID OPTIONS
C2015T	POLYCARBONATE C-Clear L-Opal S-Smoke P-Clear Prism	INCANDESCENT (1) 200W MAX Medium Base	BK-Black BZ-Bronze WH-White	DSR-Dark Sky Reflector HS-House Shield MG-Mogul Socket MT-Multi-Tap (Specify 208, 240, or 277v. Tapped at 120v by default) R3-Type III Glass Refractor R5-Type V Glass Refractor
		HPF MAGNETIC BALLAST 100MH-(1) 100W Metal Halide ☆ 150MH-(1) 150W Metal Halide ☆		
		70H-(1) 70W HPS ☆ 100H-(1) 100W HPS ☆ 150H-(1) 150W HPS ☆		
C8015T	ACRYLIC C-Clear L-Opal S-Smoke P-Clear Prism	LED LIGHT SOURCE		LED OPTIONS
		DEDICATED LED SYSTEM L40-40W 4000lm L60-60W 6000lm	CCT W-3K* C-4K B-5K*	T3-Dedicated LED Type III Distribution*
		REPLACEABLE LED CORN COB LC3-Type 3, 40W 5600lm ☆ LC5-Type 5, 54W 7200lm ☆ LCD-Dark Sky, 54W 5900lm ☆		Not all options can be used in combination. Consult factory for details.

\* Special order item. Longer lead times may apply. Option not available in Replaceable Corn Cob model. ☆ Lamp Included

REFER TO CATALOG FOR OPTION SPECIFICATIONS - Specifications subject to change without notice - FIXTURE SPEC 1/19