



WALL FIXTURE 169FM



Wave Lighting's 169FM adds a modern look to any outdoor space. This fixture is ETL Listed and IP65 rated and can be used to comply with 2016 Title 24 Part 6 High Efficacy LED Light Source Requirements. The 166FM is double gasketed with a twist-lock lens for a water and bug-proof tight seal. Wave Lighting's 169FM is designed for wall or ceiling applications and mounting hardware is included.

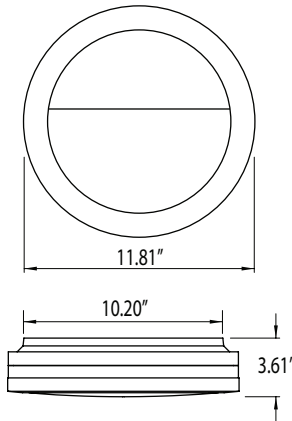

SCAN FOR VIDEO



SPECIFICATIONS

- Cast Aluminum Housing
- Mounting Hardware Included
- Black or White
- Frosted Polycarbonate Diffuser
- Wall Mount
- Minimum Starting Temp -20°F
- Hose Down - IP65 Rated
- ETL Listed for Wet Locations







LED SOURCE OPTIONS

LIGHTWAVE LED - LR/LT

- 120V, 50/60 Hz
- AC Driver-On-Board Array
- Estimated 50,000 Hrs L₇₀
- Low Flicker (LT models)
- Surge Supression
- Dimmable (see compatible dimmer list)
- High Efficacy LED Light Source
- 3000K or 4000K CCT; 80 or 90CRI
- 5 Year Warranty
- Energy Star

GUIDE: 169FMF-LR15C-BK

CALL FOR PHOTOMETRIC INFORMATION

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION	
169FM	POLYCARBONATE F-Frosted	LED LIGHT SOURCE		BK-Black WH-White	EB-Emergency Backup O-Occupancy Sensor* (NOT AVAILABLE W/LR32 or LT32)
		LIGHTWAVE LED	CCT		
		LR15-15W 1400lm 80CRI 	C-4K W-3K		
		LR22-23W 1900lm 80CRI 			
		LR32-32W 2700lm 80CRI 			
		LT15-16W 1400lm 90CRI 			
		LT22-24W 2020lm 90CRI 			
		LT32-32W 2700lm 90CRI 			
		LED MULTI-VOLT SYSTEM	4K	Options can not be combined. Consult factory for details.	
		L22-22W 1824lm			

*Use of OS option voids Energy Star Qualification.  Energy Star Qualified Product