



PROJECT _____

TYPE _____

VOLTAGE _____

E26 MEDIUM BASE LAMPS - LCE26 FOR RESIDENTIAL FIXTURES



Easily Convert existing residential fixtures to LED with E26 Medium Base LED Lamps. These lamps are for enclosed fixtures and replace up to 60W incandescent lamps. These are the perfect lamps to help reduce waste and conserve energy.




LCE26-9W
A19 LED Lamp
9.5 Watt, 3000K, 800lm
Replaces up to 60W Incandescent



LCE26-9C
A19 LED Lamp
9.5 Watt, 4000K, 800lm
Replaces up to 60W Incandescent



KELVIN COLOR TEMPERATURE SCALE

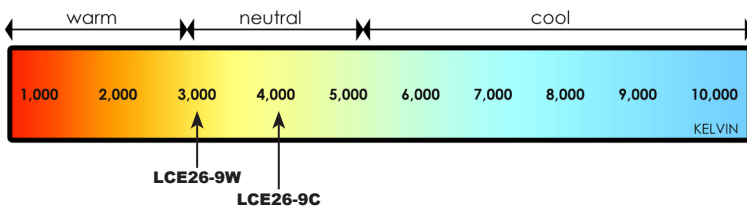

LED SOURCE OPTION

E26 REPLACEABLE LED

- 120V, 50/60Hz
- "Screw-In" Medium Base A19/E26 LED Lamp
- Polycarbonate Lens
- Estimated 15,000 Hrs L₇₀
- Triac Dimmable
- 3000K CCT 90CRI or 4000K** CCT 80CRI
- 3 Year Warranty
- UL Listed, Energy Star Certified & T24 Compliant (3K only)

** Not T24 Compliant

REFER TO CATALOG FOR OPTION SPECIFICATIONS - Specifications subject to change without notice - FIXTURE SPEC 11/17